
## THE STATE OF CONNECTICUT

## **DEPARTMENT OF HOUSING (DOH)**

# COMMUNITY DEVELOPMENT BLOCK GRANT-DISASTER RECOVERY PROGRAM (CDBG-DR)

## OWNER-OCCUPIED REHABILITATION AND REBUILDING PROGRAM (OORR)

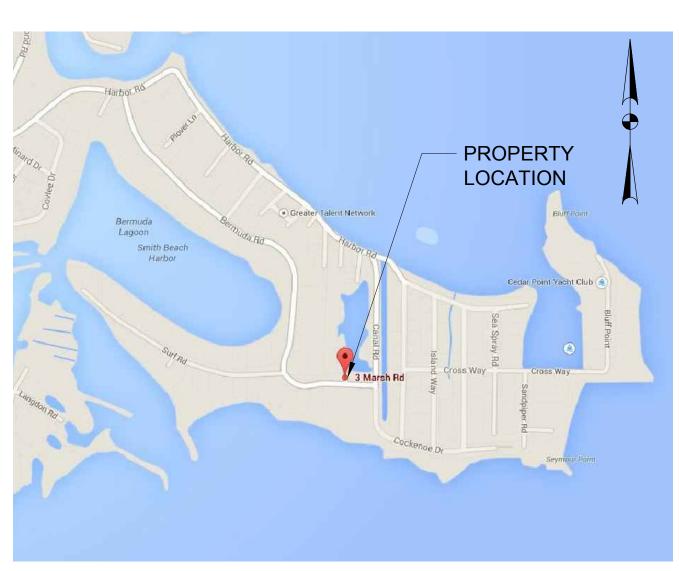


PROJECT LOCATION MAP
NTS

STORM SANDY RELIEF
GOVERNOR
DANNEL P. MALLOY

COMMISSIONER OF HOUSING EVONNE M. KLEIN

APPLICATION NO. 1846 3 MARSH ROAD WESTPORT, CT 06880 12/9/2015

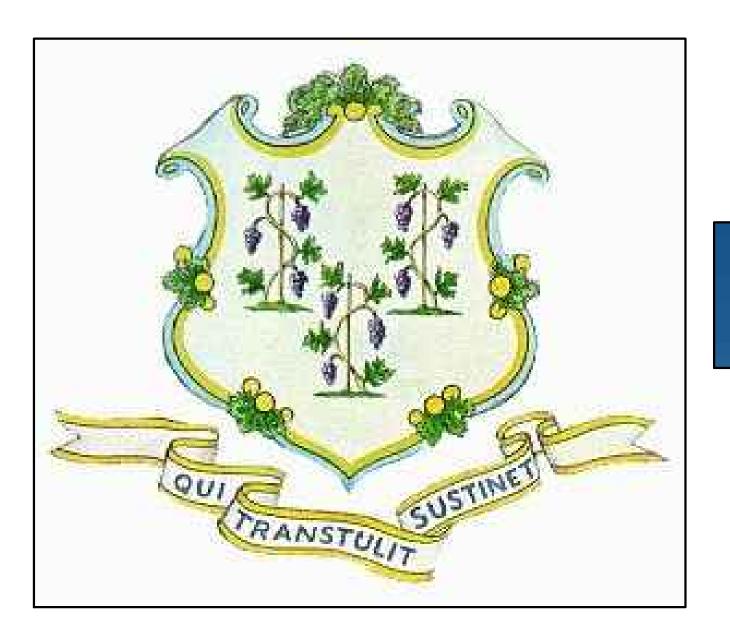

DRAWING INDEX


SHEET NO.	DRAWING TITLE
G-100	COVER SHEET
C-100	SITE PLANS
C-101	BORING LOGS & DETAILS
S-100	GENERAL NOTES
S-101	FOUNDATION PLAN
S-102	FIRST FLOOR FRAMING PLAN
S-103	SECOND FLOOR FRAMING PLAN
S-104	ROOF FRAMING PLAN
S-301	SECTIONS
S-501	DETAILS
A-101	GROUND & FIRST FLOOR PLANS
A-102	SECOND FLOOR & ROOF PLANS
A-201	WEST & EAST ELEVATIONS
A-202	SOUTH ELEVATION
A-203	NORTH ELEVATION
A - 301	HOUSE SECTIONS
A-302	HOUSE SECTIONS
A - 303	REFLECTED CEILING PLAN & DETAILS
A-601	SCHEDULES & DETAILS
MP-001	MECHANICAL & PLUMBING GENERAL NOTES
P-100	PLUMBING GROUND FLOOR PLAN
P-101	PLUMBING FIRST & SECOND FLOOR PLANS
M-100	MECHANICAL FLOOR PLANS
MP-300	MECHANICAL SCHEDULES
MP - 301	MECHANICAL & PLUMBING DETAILS
E-001	ELECTRICAL NOTES, LEGENDS, ABBREVIATIONS, DETAILS & SCHEDULES
E-100	ELECTRICAL GROUND LEVEL & FIRST FLOOR PLANS
E-101	ELECTRICAL SECOND FLOOR PLAN

CONNECTICUT DEPARTMENT OF HOUSING

NOTES:

ISSUED FOR BIDDING

REVISIONS

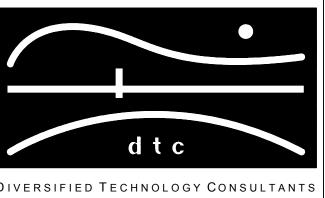

2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT


**COVER SHEET** 

DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:

DRAWN BY: R.E.N CHECKED BY: R.M

G-100



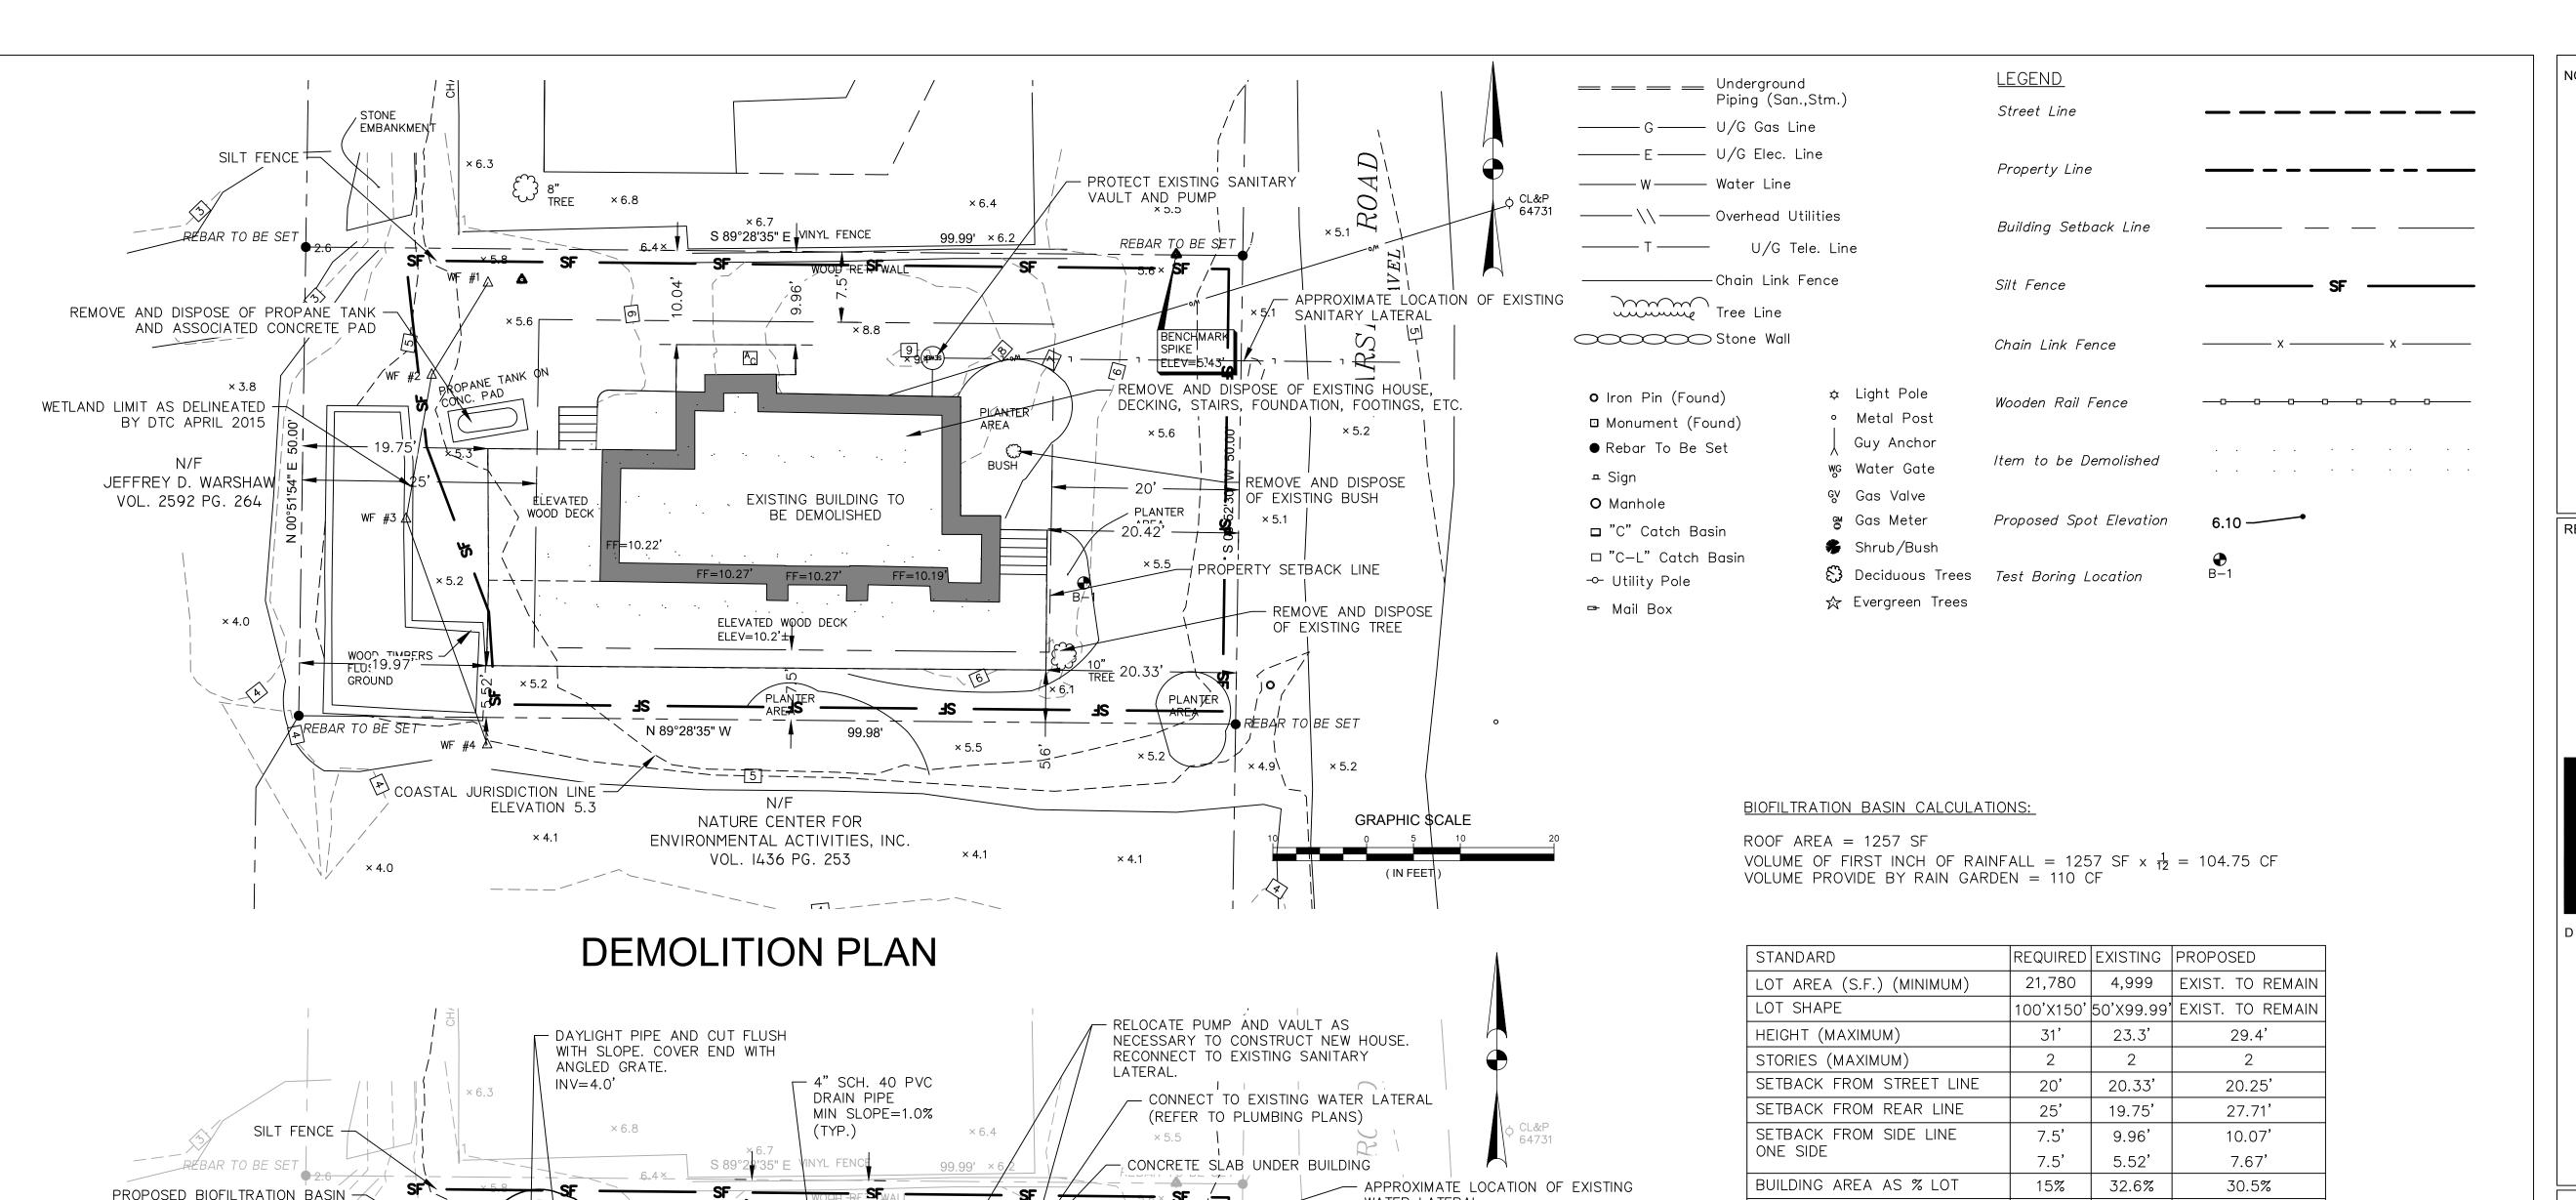

SEEDED WITH NEW ENGLAND

WETLAND LIMIT AS DELINEATED .

BY DTC APRIL 2015

JEFFREY D. WARSHAW! 15

VOL. 2592 PG. 264

WETLAND SEED MIX

PROPOSED GRAVEL

PAVING UNDER DECKING

REBAR TO BE SET

COASTAL JURISDICTION LINE

ELEVATION 5.3

 $\times$  4.1

PROPOSED BUILDING

FF EL=18.7

TOS=6.40 -

TOS=5.64

ELEVATED DECK

NATURE CENTER FOR

ENVIRONMENTAL ACTIVITIES, INC.

VOL. 1436 PG. 253

SITE PLAN

WATER LATERAL

SANITARY LATERAL

- PROPOSED GRAVEL PAVING

GRAPHIC \$CALE

(IN FEET)

SURVEY INFORMATION IS BASED ON

DATED: 9/8/2014 SEALED BY: DEAN MARTIN L.S. 70147

A-2 SURVEY MAP PREPARED BY: MARTIN SURVEYING ASSOCIATES, LLC

- PROPERTY SETBACK LINE

- APPROXIMATE LOCATION OF EXISTING

15% 32.6% 30.5% 25% 33.1% 31.0% LOT COVERAGE (MAXIMUM) IMPERVIOUS AREA (SF) 1657 1550 AVERAGE GRADE AT BUILDING = (5.2'+5.5'+5.2'+5.5'+5.6'+9.1'+8.8'+5.6'+5.3'+5.2'+6.4')/11=6.1'ELEVATION OF EXISTING BUILDING ROOF AT MID-POINT = 29.4' EXISTING BUILDING HEIGHT = 29.4'-6.1'=23.3'ELEVATION OF PROPOSED BUILDING ROOF AT MID-POINT = 35.5' PROPOSED BUILDING HEIGHT = 35.5'-6.1'=29.4'

#### <u>NOTES</u>


- 1. CONTRACTOR IS RESPONSIBLE FOR ADHERING TO ALL ZONING REGULATIONS.
- ALL DISTURBED AREAS NOT TO BE OTHERWISE COVERED SHALL BE LOAMED & SEEDED. CALL BEFORE YOU DIG - THE CONTRACTOR IS HEREBY REMINDED THAT THE CONNECTICUT GENERAL STATUES REQUIRE NOTICE TO UTILITY COMPANIES PENDING EXCAVATION AT OR NEAR PUBLIC UTILITIES. THE CONTRACTOR SHALL CALL 1-800-922-4455 AT LEAST 72 HOURS PRIOR TO EXCAVATING AT ANY LOCATION. A COPY OF THE CALL BEFORE YOU DIG PROJECT REFERENCE NUMBERS SHALL BE GIVEN TO THE OWNER PRIOR TO EXCAVATION.
- 4. SOIL EROSION AND SEDIMENT CONTROL MEASURES SHALL CONFORM TO THE STATE OF CONNECTICUT 2002 GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL AS AMENDED THROUGH BID DATE OF THIS
- 5. PROTECT EXISTING VEGETATION ON PROPERTY NOT WITHIN CONSTRUCTION AREA. COORDINATE WITH HOMEOWNER.

6. NO STOCKPILING OF SOIL WILL BE ALLOWED ON SITE. EXCESS SOIL MUST BE REMOVED FROM SITE. ENTIRE PROPERTY WITHIN WESTPORT WATERWAY PROTECTION LINES 8. UTILITY LOCATIONS ARE APPROXIMATE. CONTRACTOR RESPONSIBLE FOR LOCATING AND RECONNECTING ALL UTILITIES

NOTES:

**ISSUED FOR BIDDING** 

REVISIONS

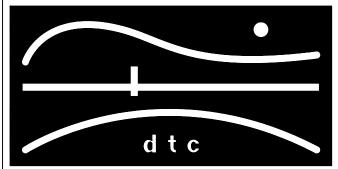

DIVERSIFIED TECHNOLOGY CONSULTANTS 2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX


OORR **APPLICATION NO. 1846 BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT


> SITE **PLANS**

DTC PROJECT NUMBER: 13-449-026 DTC DRAWING FILE: SCALE: DRAWN BY: EPZ DATE: 12/9/2015 CHECKED BY: JAB

SHEET:

C-100

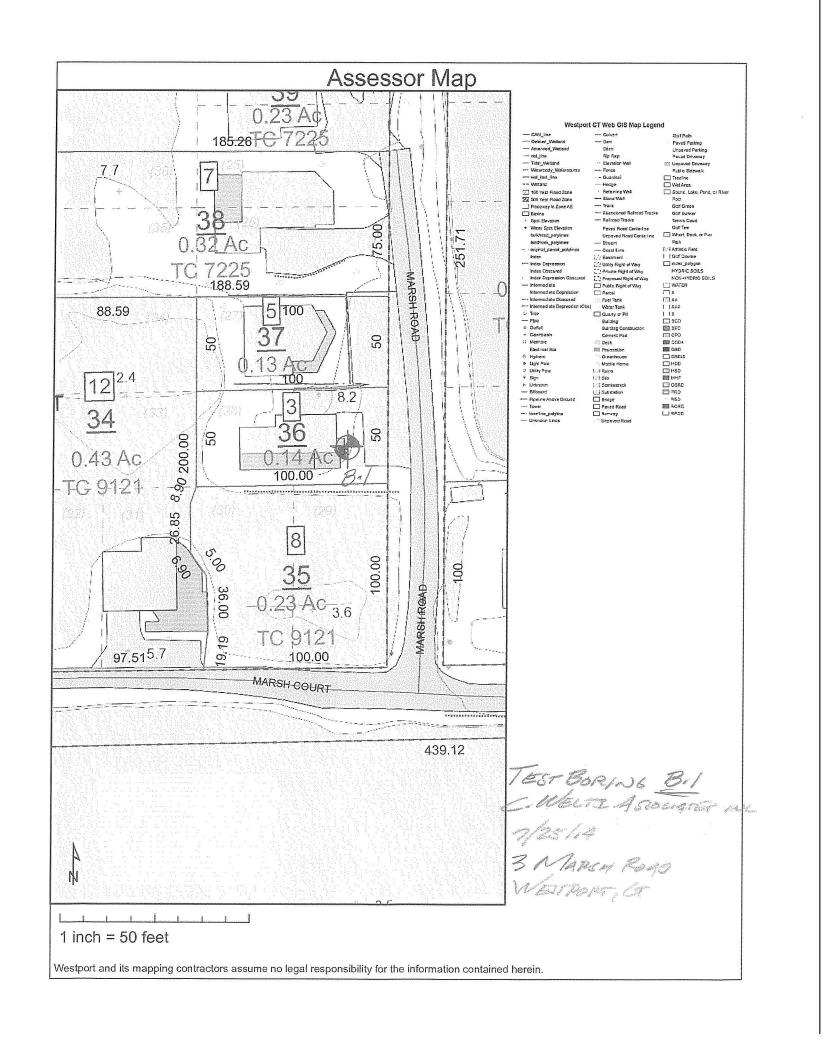

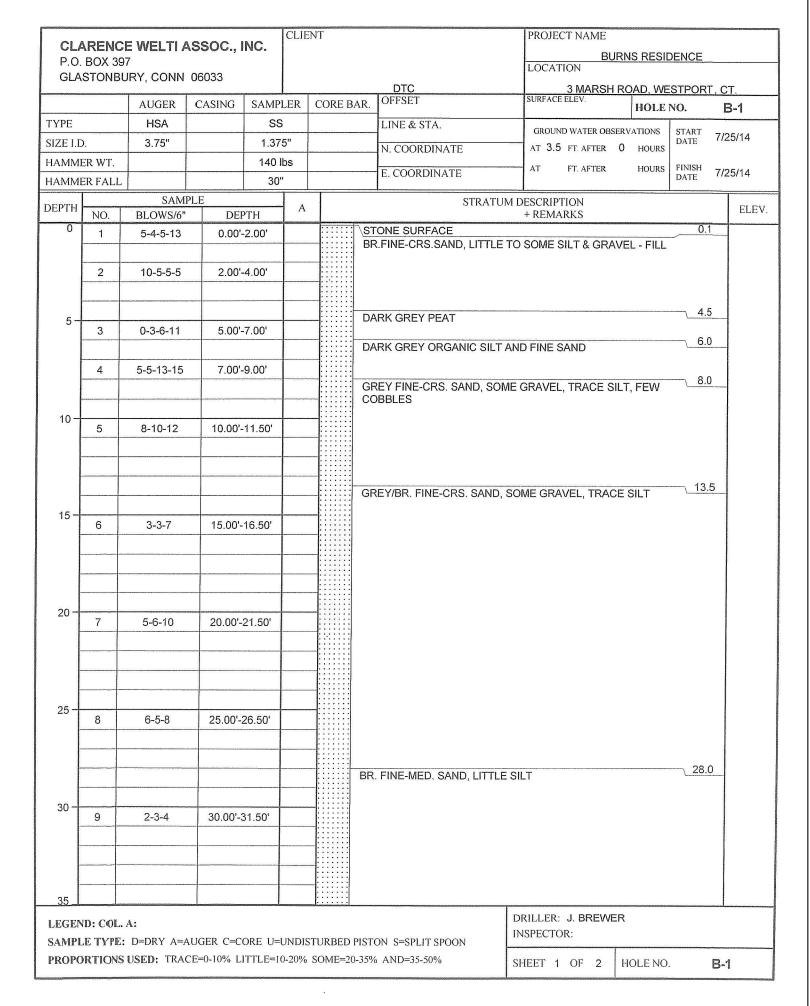

FINISH GRADE


34" MINUS PROCESSED STONE BASE PLACED AND COMPACTED IN TWO LIFTS


\_COMPACTED SUBGRADE TO 95% IN FILL AREAS — UTILIZE

BANK RUN GRAVEL PLACED

AND COMPACTED IN 12"


COMPACT TO 97% OF MODIFIED OPTIMUM DENSITY

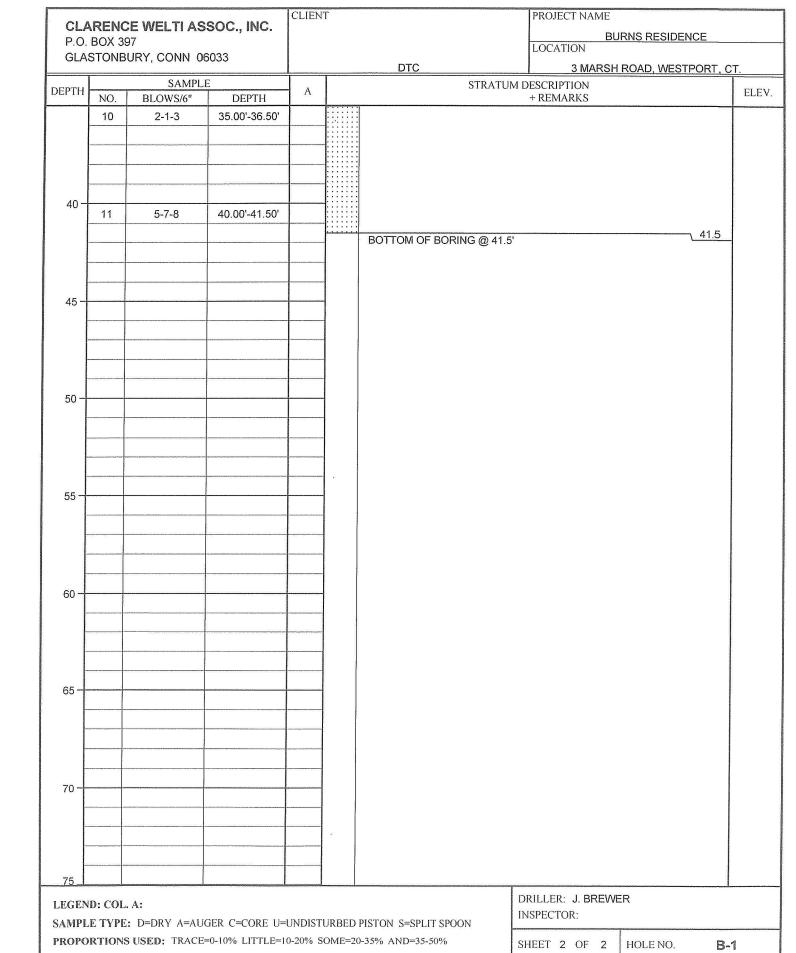

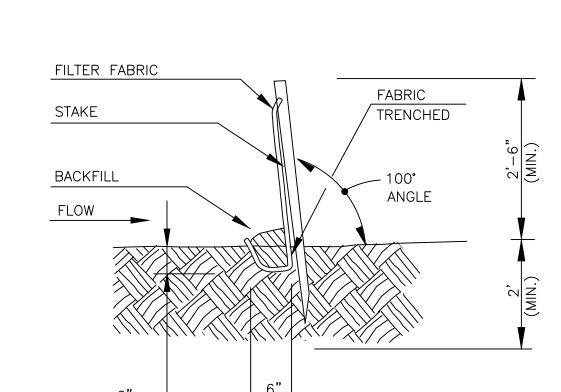


- A. MINIMUM LENGTH OF SILT FENCE IS 15 FT.
- B. MAXIMUM POST SPACING IS 8 FT.C. JOINTS ONLY AT SUPPORT POST WITH MINIMUM 2 FT. OVERLAP, SECURELY SEALED.
- D. SEDIMENTATION DEPOSITS SHALL BE REMOVED WHEN THEY REACH
  1/2 THE HEIGHT OF THE SILT FENCE.
  E. SILT FENCE SHALL NOT BE USED IN A WATER COURSE.
- F. UPON ESTABLISHMENT OF GROUND COVER ON DISTURBED AREAS,
  AND WHEN DIRECTED BY THE ENGINEER, FENCE WILL BE REMOVED
  AND ANY SEDIMENTATION WILL BE THINLY SPREAD UPON EXISTING
  GROUND COVER.

#### SILT FENCE DETAIL

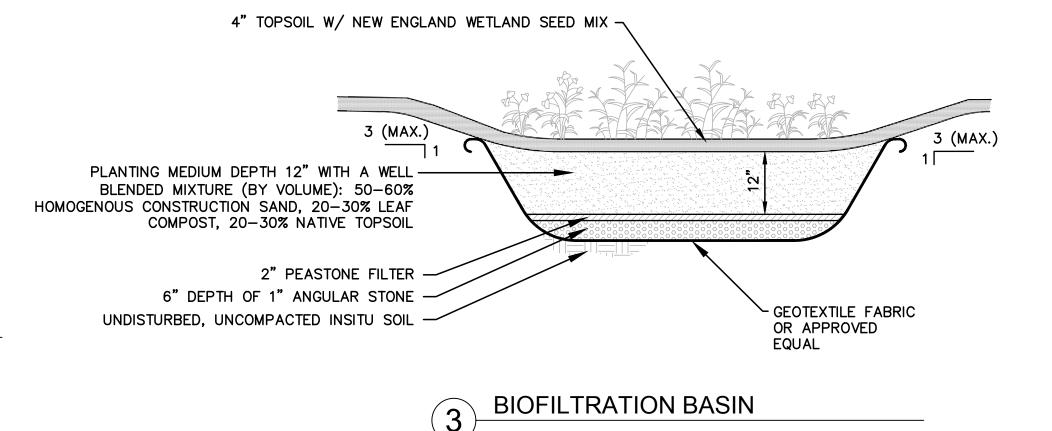


**GRAVEL PAVEMENT** 

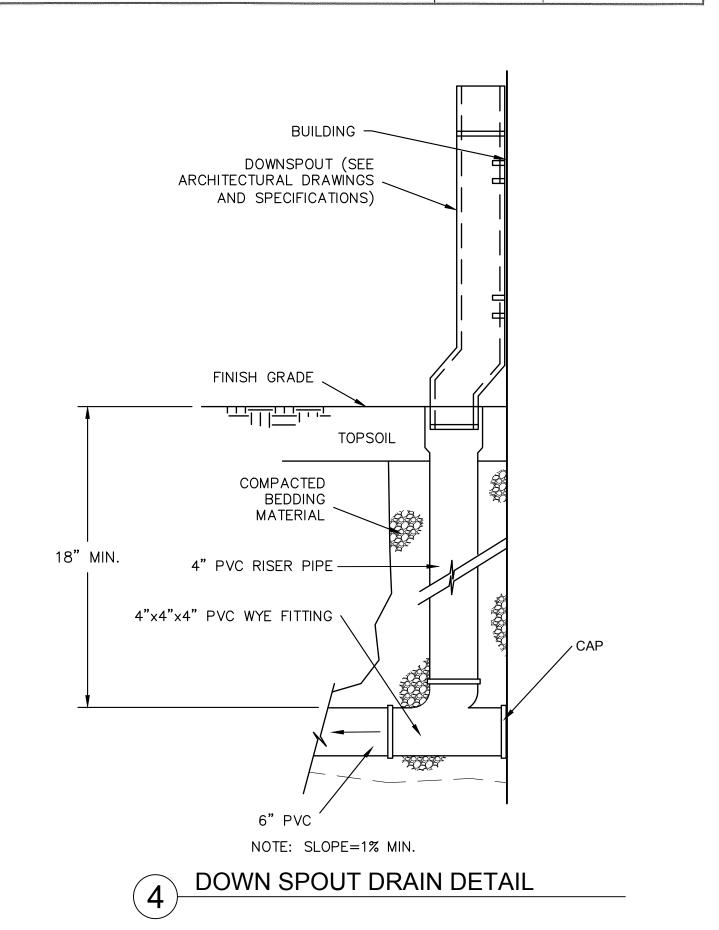

NOTES:

ISSUED FOR BIDDING

REVISIONS

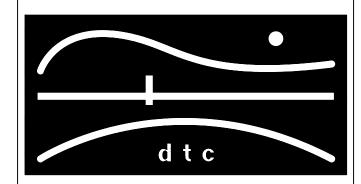

DIVERSIFIED TECHNOLOGY CONSULTANTS

2321 WHITNEY AVE HAMDEN CT 06518

203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

### BORING LOGS AND DETAILS

DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:

 SCALE:
 DRAWN BY:
 EPZ

 DATE:
 12/9/2015
 CHECKED BY:
 JAB

C-101

GENERAL NOTES

GOVERNING CODE: 2009 INTERNATIONAL RESIDENTIAL CODE OF THE INTERNATIONAL CODE COUNCIL.INC. WITH THE 2013 AMENDMENTS TO THE STATE CODE.

#### DESIGN LOADS:

NEW FLOOR AREAS:

FIRST FLOOR: DEAD LOAD 15 PSF LIVE LOAD 40 PSF

DEAD LOAD 15 PSF

LIVE LOAD 40 PSF

ROOF DEAD LOAD = 15 PSF

WIND LOAD CRITERIA FOR NEW, ALTERED, OR REPAIRED ELEMENTS:

BASIC WIND SPEED = 100 MPH, EXPOSURE CLASSIFICATION "D".

SEISMIC LOAD CRITERIA FOR NEW, ALTERED OR REPAIRED ELEMENTS

SEISMIC DESIGN CATEGORY "B"

- I. SHOULD ANY OF THE DETAILED INSTRUCTIONS SHOWN ON THE PLANS CONFLICT WITH THE GENERAL STRUCTURAL NOTES, THE SPECIFICATIONS, OR WITH EACH OTHER, THE STRICTEST PROVISION SHALL GOVERN.
- 2. IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO DETERMINE ERECTION PROCEDURE AND SEQUENCE AND TO INSURE THE SAFETY OF THE BUILDING AND ITS COMPONENT PARTS DURING ERECTION. THIS INCLUDES THE ADDITION OF WHATEVER SHORING, SHEETING, TEMPORARY BRACING, GUYS OR TIEDOWNS WHICH MIGHT BE NECESSARY. SUCH MATERIAL SHALL REMAIN THE CONTRACTOR'S PROPERTY AFTER COMPLETION OF THE PROJECT.
- 3. IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO FOLLOW ALL APPLICABLE SAFETY CODES AND REGULATIONS DURING ALL PHASES OF CONSTRUCTION.
- 4. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, ELEVATIONS, ANGLES AND EXISTING CONDITIONS BEFORE PROCEEDING WITH ANY WORK.
- 5. ALL SECTIONS AND DETAILS SHALL BE CONSIDERED TYPICAL AND APPLY FOR THE SAME AND SIMILAR SITUATIONS
- THROUGHOUT THE BUILDING, UNLESS OTHERWISE SPECIFICALLY NOTED. 6 NEW, ALTERED, OR REPAIRED ELEMENTS COMFORM TO THE 2009 INTERNATIONAL RESIDENTIAL CODE FOR ONE AND
- 7. ELEVATION OF THE BOTTOM OF THE LOWEST HOROZONTAL STRUCTURAL MEMBER SHALL BE ELEVATION 16.0.

TWO FAMILY DWELLINGS INCLUDING THE CONNECTICUT 2013 AMMENDMENT TO THE STATE BUILDING CODE.

#### FOUNDATIONS

- I. BOTTOM OF ALL EXTERIOR FOOTINGS SHALL BE AT LEAST 3'\_6" BELOW FINISHED GRADE.
- 2. PLACEMENT OF ALL COMPACTED FILL MUST BE UNDER SUPERVISION OF AN APPROVED TESTING LABORATORY (SEE SPECIFICATIONS). CONCRETE FOUNDATIONS SHALL NOT BE PLACED UNTIL SUBBASE HAS BEEN CHECKED IN PLACE AND APPROVED BY TESTING LABORATORY.
- 3. CONTROL JOINT SPACING IN FOUNDATION WALLS SHALL NOT EXCEED 30 FEET. 50% OF HORIZONTAL REINFORCEMENT SHALL EXTEND THROUGH JOINT AND HAVE A CLASS "B" SPLICE (PER ACI 3 | 8-02).
- 4. WHERE REQUIRED, CONSTRUCTION JOINTS SHALL BE KEYED AND OCCUR AT CONTROL JOINT INTERVALS.

MATERIALS:

WOOD PILES: ASTM D25

 $F_c = 1200 \text{ PSI PARALLEL TO GRAIN}$ MIN. COMPRESSIVE STRENGTH: PRESSURE TREATMENT: AWPA C3 | 2 PCF CREOSOTE 38" MEASURED 3" FROM BUTT MIN. BUTT CIRCUMFERENCE:

- I. ALL PILES SHALL BE INSTALLED TO SUPPORT A MINIMUM AXIAL LOAD OF 15 TONS.
- 2. CAPACITY OF PILES SHALL BE DETERMINED USING THE FOLLOWING FORMULA:

R = 2(E)/(S+0.2)

WHERE R = SAFE BEARING VALUE IN POUNDS

E = MEASURED STRIKING ENERGY OF HAMMER PER BLOWS (FOOT-POUNDS)

S = AVERAGE PENETRATION PER BLOW IN INCHES THRU THE LAST THREE INCHES

- 3. PRIOR TO ORDERING PILES, THE CONTRACTOR SHALL DRIVE TEST PILES TO DETERMINE ACTUAL PILE LENGTHS AND SATISFY PENETRATION RESISTANCE REQUIREMENTS.
- 4. TOLERANCES:

LATERAL DISPLACEMENT: 6 INCHES MAX VARIATION FROM PLUMB: 2% MAX. CUT-OFF ELEVATION: +/- I INCH

- 5. TREAT PILE CUT-OFF SURFACE WITH THREE COATS OF HOT CREOSOTE.
- 6. BASE BID SHALL CONSIST OF 36 PILES AT 40 FT. LONG EACH

REFER TO SPECIFICATION FOR UNIT PRICE ADJUSTMENTS WHERE ACTUAL INSTALLED PILE LENGTH AND QUANTITY VARY FROM BASE BID.

#### SLAB ON GRADE

I. CONTROL JOINTS ARE TO BE CREATED IN SLABS ON GRADE. JOINTS SHALL BE SAW CUT 1/8" WIDE AND TO A DEPTH EQUAL TO 1/4 OF THE SLAB THICKNESS. LOCATE JOINTS 15' O" ON CENTER (PLUS OR MINUS 5' O") IN EACH DIRECTION, UNLESS OTHERWISE SHOWN ON DRAWINGS. CONSTRUCTION JOINTS AS REQUIRED SHALL BE KEYED AND LOCATED AT CONTROL JOINT INTERVALS.

#### CONCRETE

MATERIALS:

CONCRETE SHALL DEVELOP STRENGTH IN 28 DAYS AS FOLLOWS.

LOCATION STRENGTH (PSI) FOUNDATIONS 4000 SLABS ON GRADE 4000

- I. ALL DETAILING, FABRICATION AND ERECTION OF REINFORCING BARS MUST FOLLOW THE LATEST ACI CODE AND THE LATEST ACI "MANUAL OF STANDARD PRACTICE FOR DETAILING REINFORCED CONCRETE STRUCTURES".
- 2. REINFORCING STEEL SHALL BE 60,000 PSI YIELD.
- 3. NO TACK WELDING OF REINFORCING WILL BE PERMITTED.
- 4. UNLESS NOTED OTHERWISE, ALL LAP SPLICES SHALL BE CLASS B, IN ACCORDANCE WITH ACI 318-02.
- 5. WELDED WIRE FABRIC SHALL CONFORM TO ASTM A\_I 85.
- 6. WIRE MESH REINFORCEMENT MUST LAP ONE MESH SIZE AT SIDES AND ENDS AND BE WIRED TOGETHER.
- 7. WELDED WIRE FABRIC SIDE LAPS SHALL BE STAGGERED TO AVOID FOUR MESH THICKNESS AT COINCIDING END LAP AND SIDE LAP LOCATION.
- 8. NO CALCIUM CHLORIDE OR ADMIXTURES CONTAINING MORE THAN O. I % CHLORIDE BY WEIGHT OF ADMIXTURE SHALL BE USED IN
- 9. AT INTERSECTIONS OF REINFORCED CONCRETE WALLS, PROVIDE CORNER DOWELS OF SAME SIZE AND AT THE SAME SPACING AS THE SMALLER HORIZONTAL REINFORCING. DOWELS SHALL HAVE A CLASS B LAP WITH HORIZONTAL REINFORCING IN EACH
- 10. PROVIDE CORROSION RESISTANT ACCESSORIES IN ALL EXPOSED CONSTRUCTION
- II. ALL KEYS IN CONCRETE WALLS SHALL BE 2 X 4 UNLESS NOTED OTHERWISE.
- I 2. CONCRETE PIERS: PLACE CONCRETE PIERS AND WALLS TOGETHER. SET PIER REINFORCING AND SET WALL REINFORCING THROUGH PIER VERTICAL BARS. PROVIDE DOWELS WITH STANDARD HOOK FROM FOOTING AT ALL PIERS. SIZE AND QUANTITY OF DOWELS TO MATCH VERTICAL PIER REINFORCING (CLASS "B" SPLICE).
- 13. ALL CONCRETE TO REMAIN EXPOSED TO VIEW SHALL RECEIVE A SMOOTH RUBBED FINISH (SEE SPECIFICATIONS).
- 14. ALL CONCRETE CORNERS WITH BOTH SIDES EXPOSED TO VIEW SHALL BE SQUARE UNLESS OTHERWISE SHOWN OR NOTED. THE EDGE SHALL BE RUBBED, PRODUCING A SMOOTH, DENSE SURFACE WITHOUT PITS OR IRREGULARITIES.
- 15. PROVIDE CLEARANCE FROM EDGE OF REINFORCING TO EDGE OF CONCRETE AS FOLLOWS:

FOOTINGS (AGAINST EARTH) GRADE BEAMS (BOTTOM REINFORCING) COLUMNS AND PIERS (VERTICAL REINFORCING) 2" SLABS ON GRADE (W.W.F.) 1/3 X THK. FROM TOP SURFACE

- I G. PROVIDE NO OPENINGS IN CONCRETE BEAMS UNLESS DETAILED ON THE STRUCTURAL DRAWINGS.
- 17. JOINTS NOT INDICATED ON THE DRAWINGS SHALL BE MADE SO AS TO LEAST IMPAIR THE STRENGTH OF THE STRUCTURE. THERE SHALL BE NO HORIZONTAL JOINTS IN BEAMS OR SUSPENDED SLABS.
- 18. PROVIDE THE FOLLOWING AT OPENINGS IN ALL CONCRETE WALLS AND FRAMED SLABS, UNLESS OTHERWISE INDICATED:

I-#5 AT EACH FACE ON EACH SIDE OF OPENING, EXTENDING 2'-0" BEYOND OPENING.

I-#5 X 4'-0" LONG AT EACH FACE DIAGONALLY AT EACH CORNER.

19. REINFORCING STEEL SHOP DRAWINGS SHALL INDICATE THE SEQUENCE IN WHICH LAYERS OF CROSSING REINFORCING SHOULD BE PLACED, IN ORDER TO PRODUCE THE CORRECT OUTERMOST LAYER AS INDICATED ON THE DRAWINGS.

#### STRUCTURAL STEEL

MATERIALS:

ASTM A 572, GR.50 STRUCTURAL STEEL W-SHAPES STRUCTURAL STEEL NOT INCLUDED ABOVE ASTM A 36 ANCHOR BOLTS ASTM A307 WELDING ELECTRODE ASTM E 70

- I. DESIGN, FABRICATION, AND ERECTION OF STRUCTURAL STEEL SHALL CONFORM TO CURRENT AMERICAN INSTITUTE OF STEEL CONSTRUCTION SPECIFICATION.
- 2. WELDING SHALL CONFORM TO THE CODE FOR "ARC AND GAS WELDING IN BUILDING CONSTRUCTION" OF THE AMERICAN WELDING
- 3. ALL WELDING SHALL BE DONE BY A CERTIFIED WELDER IN ACCORDANCE WITH A.W.S. STANDARDS.
- 4. PROVIDE 9/16" DIAMETER HOLES FOR WOOD NAILERS AS REQUIRED.
- 5. PROVIDE 8" X 8" X 5/8" GALVINISED BEARING PLATES FOR ALL BEARING BEAMS UNLESS NOTED OTHERWISE.
- 6. EXISTING STEEL SURFACES TO RECEIVE FIELD WELDS SHALL BE THOROUGHLY CLEANED UNTIL FREE FROM PAINT, RUST, GREASE, ETC.

#### WOOD FRAMING

I. LUMBER FOR WOOD JOISTS, RAFTERS AND BEAMS SHALL BE DOUGLAS FIR, LARCH NUMBER 2 GRADE, WITH 19% MAXIMUM MOISTURE CONTENT AND MINIMUM SAFE STRENGTH CAPACITY OF:

Fb = 900 PSI FOR BENDING Fc (perp.) = 625 PSI FOR COMPRESSION PERP. TO GRAIN Fc (par.) = 1350 PSI FOR COMPRESSION PARALLEL TO GRAIN  $F_V = 125 \text{ PSI FOR HORIZONTAL SHEAR}$ E = 1,600,000 PSI MODULUS OF ELASTICITY

#### 2. FLOOR JOIST BRIDGING:

PROVIDE I " X 3" DIAGONAL BRIDGING (OR EQUIVALENT) AT 8'-0" MAXIMUM ON CENTER.

- 3. CUTTING AND NOTCHING: IN BEAMS, JOISTS AND RAFTERS, CUTS SHALL NOT BE DEEPER THAN SHOWN ON DRAWINGS, AND IN NO CASE DEEPER THAN 1/5 THE DEPTH OF THE BEAM, JOIST OR RAFTER.
- 4. CONNECTIONS AND FASTENINGS: ALL MEMBERS SHALL BE FASTENED AT THEIR JUNCTIONS WITH APPROVED CONNECTORS, SPIKES, NAILS, STRAPS, OR OTHER DEVICES.
- 5. DOUBLE UP JOISTS AND RAFTER UNDER ALL HVAC UNITS, UNDER ALL PARTITIONS, AND ELSEWHERE AS INDICATED ON THE
- 6. ALL OPENINGS SHALL BE FRAMED WITH DOUBLE POSTS, DOUBLE JOISTS OR DOUBLE RAFTERS AND HEADERS ON END (UPRIGHT), UNLESS OTHERWISE INDICATED.
- 7. CONNECT RAFTERS, JOISTS AND HEADERS FRAMING INTO THE SIDES OF OTHER WOOD MEMBERS WITH FORMED "SADDLE" TYPE JOIST HANGERS, MADE FROM 18 GA. GALVANIZED STEEL PER ASTM A93. INSTALL IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
- 8. MEMBERS INDICATED THUS: "LVL" SHALL BE LAMINATED VENEER LUMBER, "MICROLAM" SECTIONS WITH THE FOLLOWING MINIMUM MATERIAL PROPERTIES:


 $Fb = 2600 \, PSI$ Fc (perp.) = 750 PSIFc (par.) = 2510 PSIFv = 285 PSIE = 1,900,000 PSI

- 9. ALL EXTERIOR WOOD SHALL BE PREASURE TREATED.
- IO. ALL PARALLAM PSL PLUS MEMBERS SHALL HAVE THE FOLLOWING PROPERTIES AND BE PRESURE TREATED (WOLMANIZED).

Fb=2900 PSI Fc(perp) = 750 PSIFc(par) = 2900 PSI $F_V = 290 \, PSI$ E = 2,000,000 PSI NOTES:

ISSUED FOR **BIDDING** 

REVISIONS

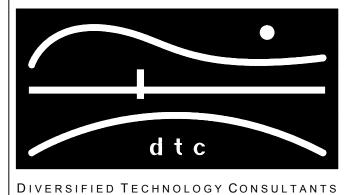

2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX

OORR **APPLICATION NO. 1846 BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT


> **GENERAL NOTES**

DTC PROJECT NUMBER: 13-449-026

DTC DRAWING FILE: DRAWN BY: R.E.M SCALE: N.T.S

DATE: 12/9/2015

CHECKED BY: R.M

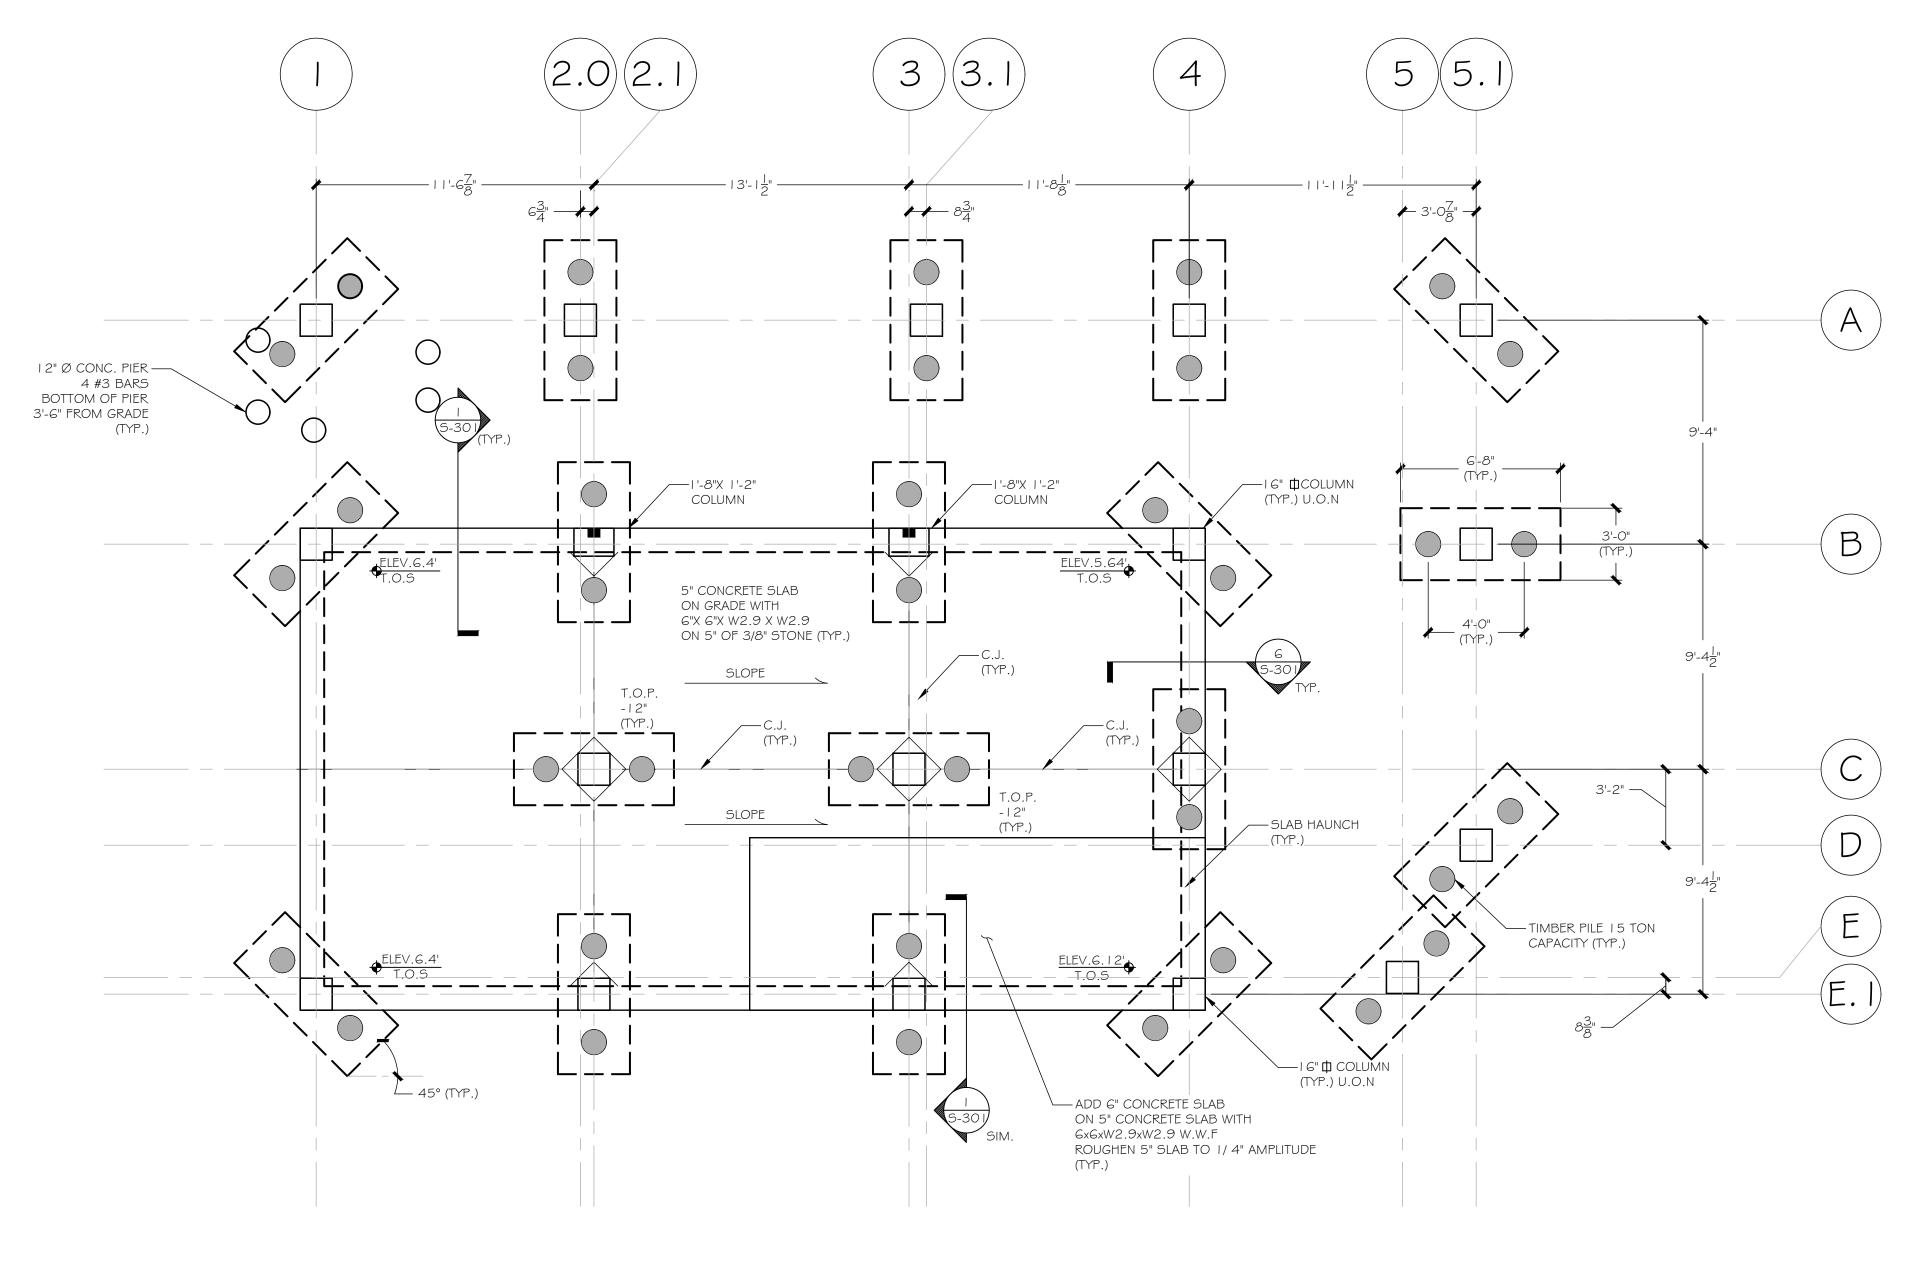


FOUNDATION PLAN

SCALE: 1 = 1 -0

NOTES:

ISSUED FOR BIDDING

REVISIONS

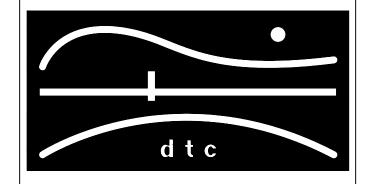

DIVERSIFIED TECHNOLOGY CONSULTANTS 2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX


OORR APPLICATION NO. 1846 **BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT


> FOUNDATION PLAN


DTC PROJECT NUMBER: 13-449-026

DTC DRAWING FILE: SCALE: 1/4"=1'-0"

DRAWN BY: R.E.M CHECKED BY: R.M DATE: 12/9/2015





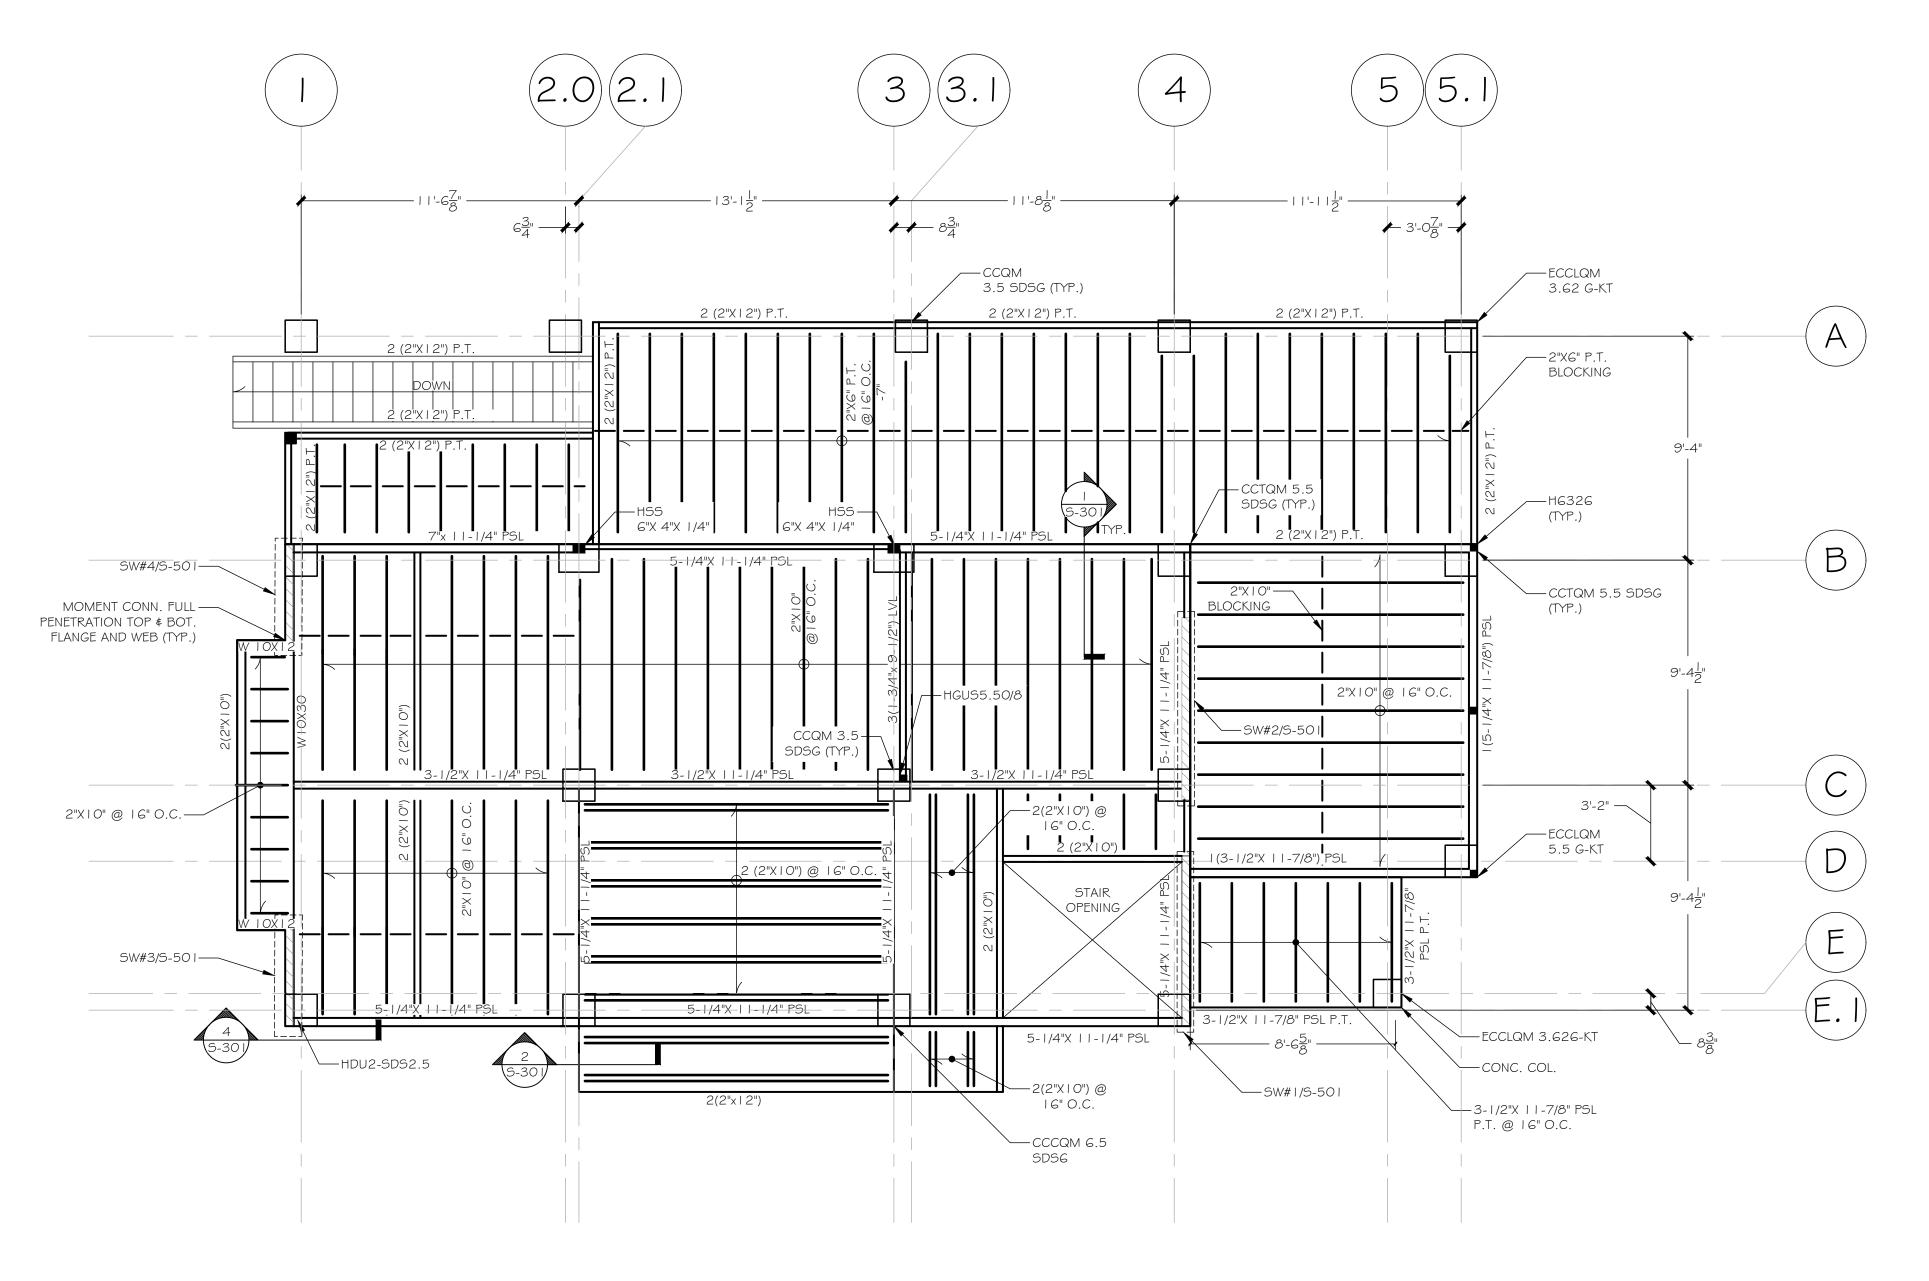

FIRST FLOOR FRAMING PLAN


ELEVATION OF LOWEST STRUCTURAL MEMBER 16.58'

SCALE: 1 = 1 -0

NOTES:

ISSUED FOR BIDDING

REVISIONS

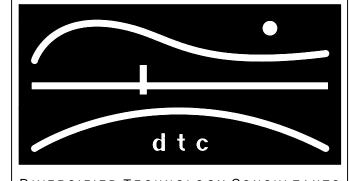

DIVERSIFIED TECHNOLOGY CONSULTANTS 2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX


OORR APPLICATION NO. 1846 **BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT

> FIRST FLOOR FRAMING PLAN

DTC PROJECT NUMBER: 13-449-026 DTC DRAWING FILE:

DRAWN BY: R.E.M SCALE: 1/4"=1'-0" CHECKED BY: R.M DATE: 12/9/2015



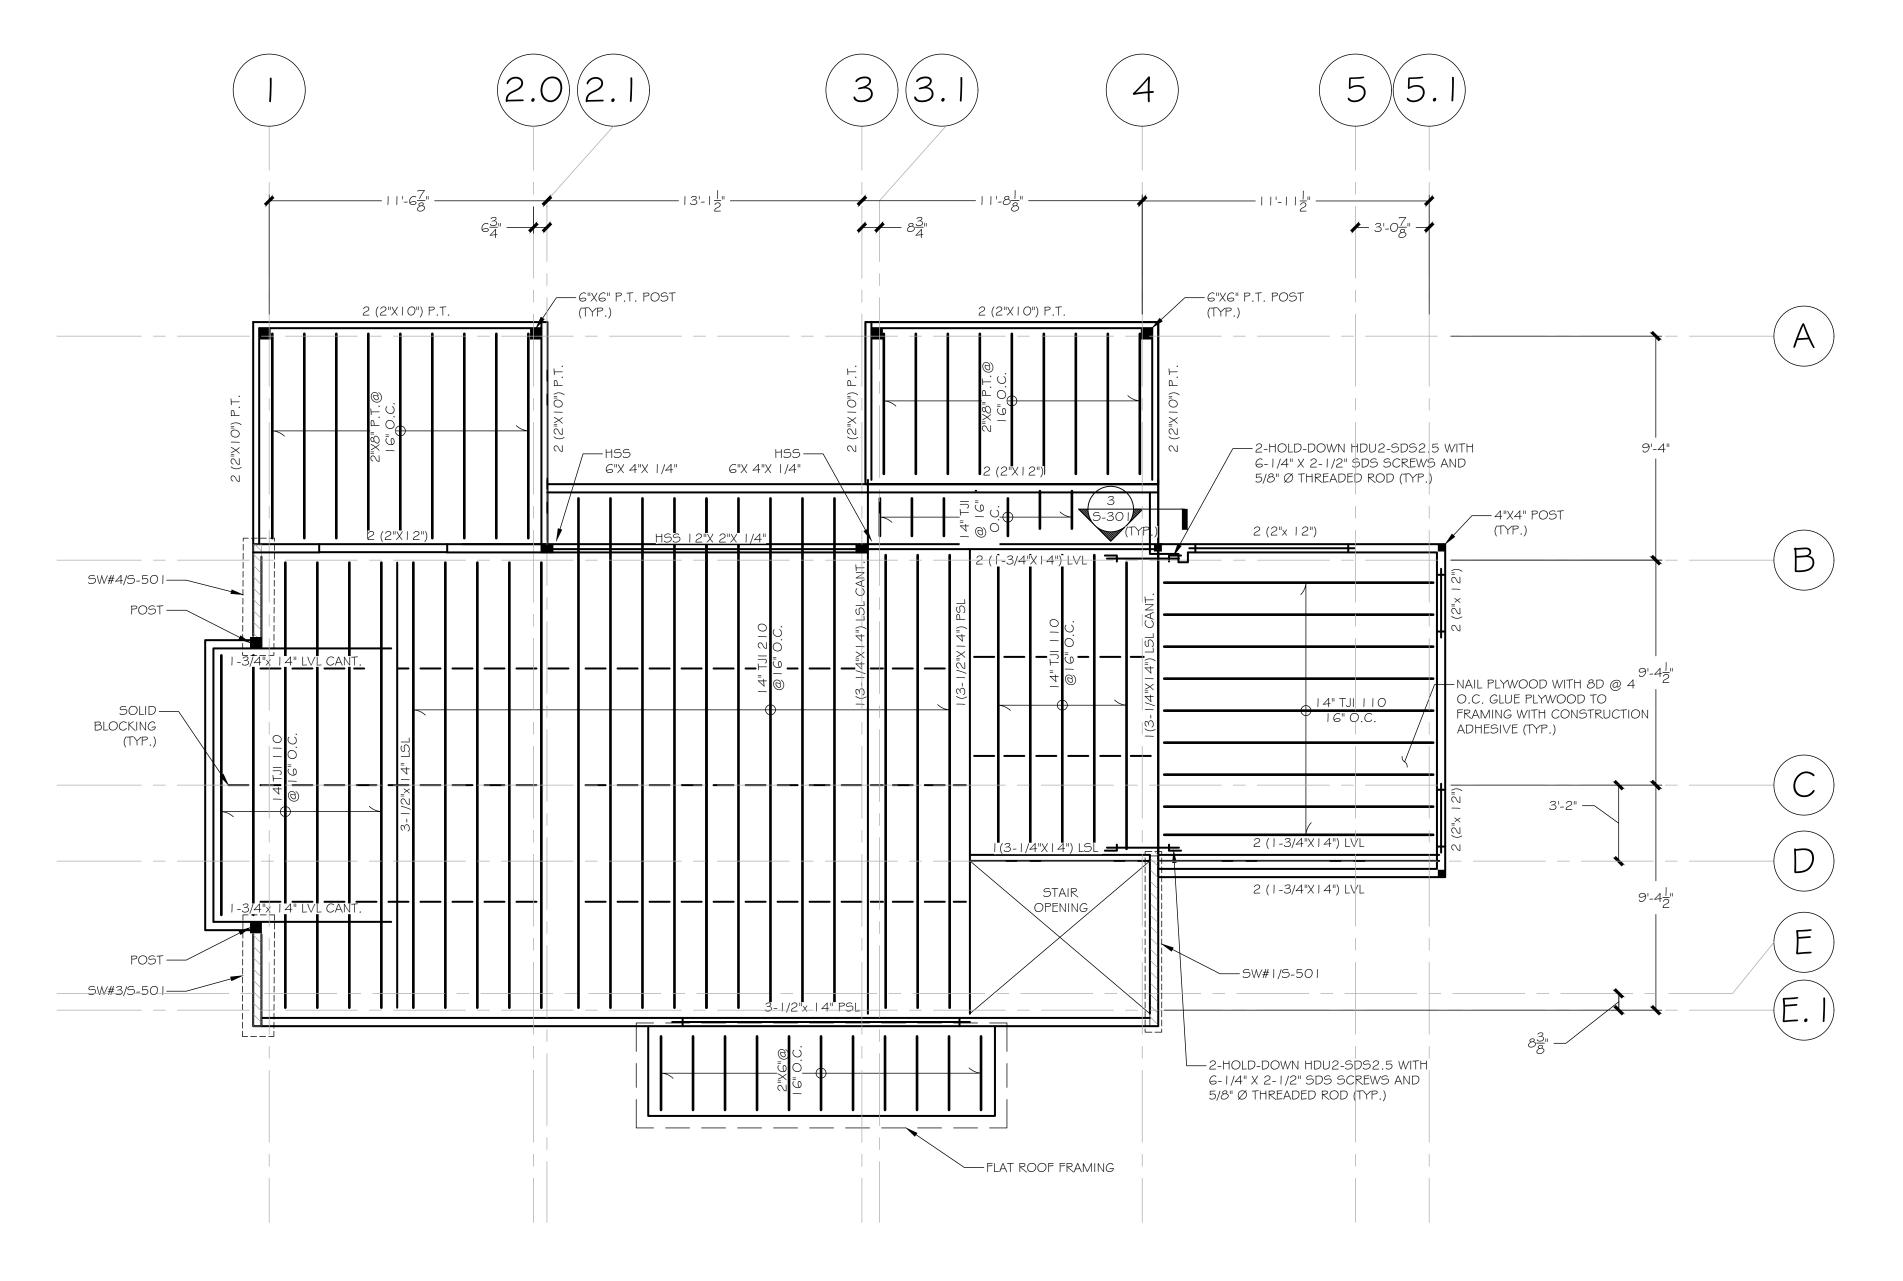


SECOND FLOOR FRAMING PLAN

SCALE: 1 = 1 -0

NOTES:

ISSUED FOR BIDDING

REVISIONS

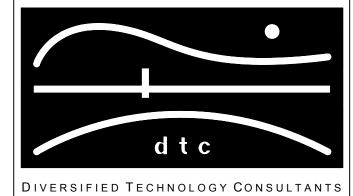

2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX

OORR APPLICATION NO. 1846 **BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT


> SECOND FLOOR FRAMING PLAN

DTC PROJECT NUMBER: 13-449-026

DTC DRAWING FILE: SCALE: 1/4"=1'-0"

DRAWN BY: R.E.M CHECKED BY: R.M DATE: 12/9/2015



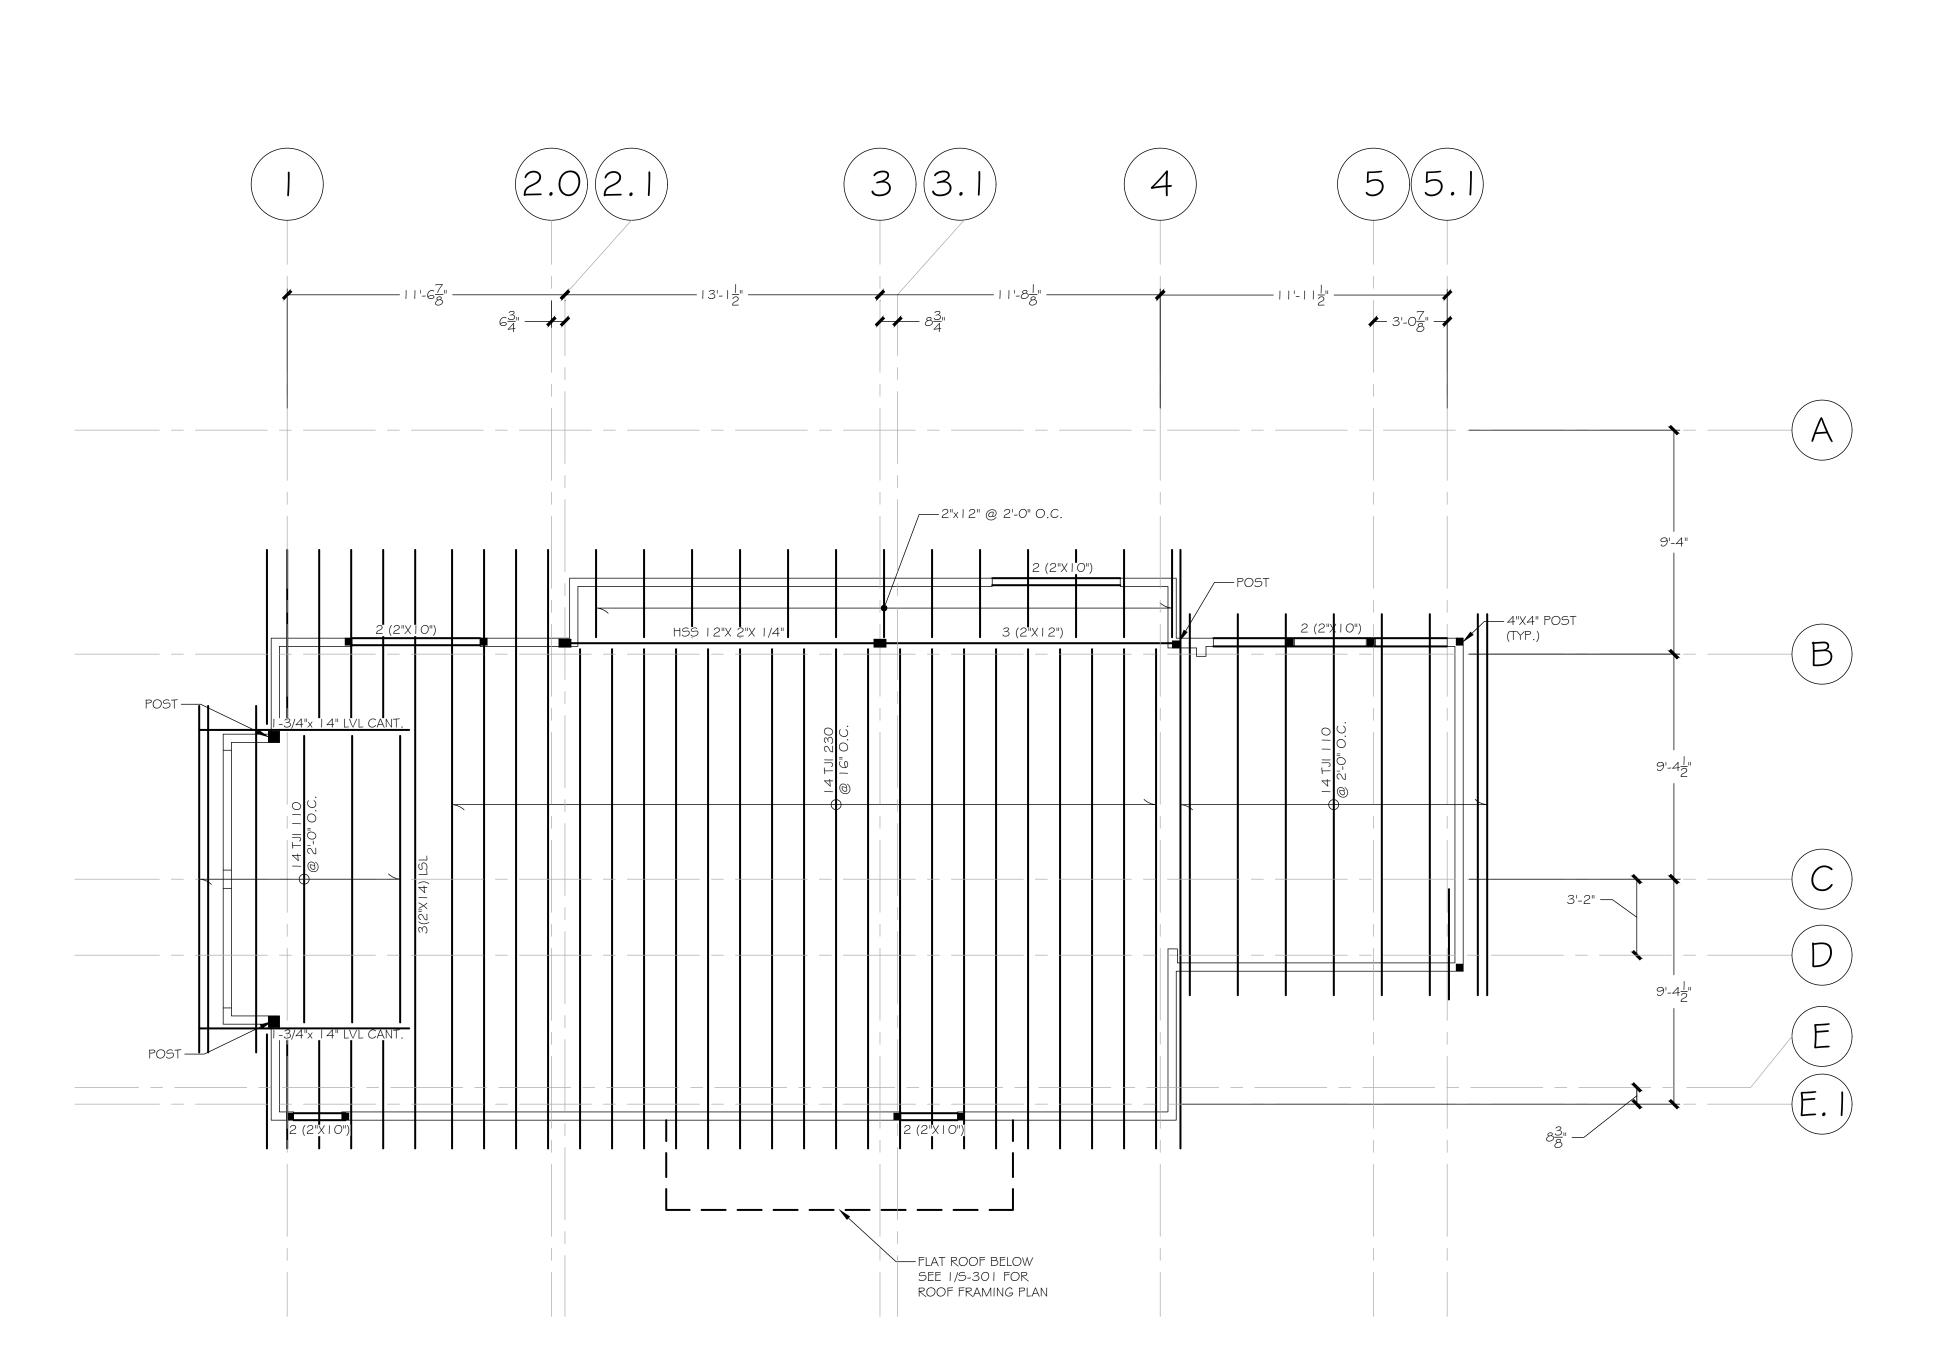


ROOF FRAMING PLAN

SCALE: 1 = 1 -0

NOTES:

ISSUED FOR BIDDING

REVISIONS

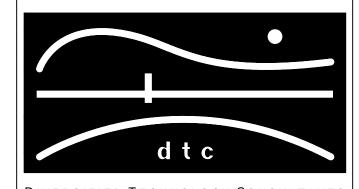

DIVERSIFIED TECHNOLOGY CONSULTANTS

2321 WHITNEY AVE HAMDEN CT 06518

203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT


ROOF FRAMING PLAN

DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:

 SCALE:
 1/4"=1'-0"
 DRAWN BY:
 R.E.M

 DATE:
 12/9/2015
 CHECKED BY:
 R.M

SHEET:

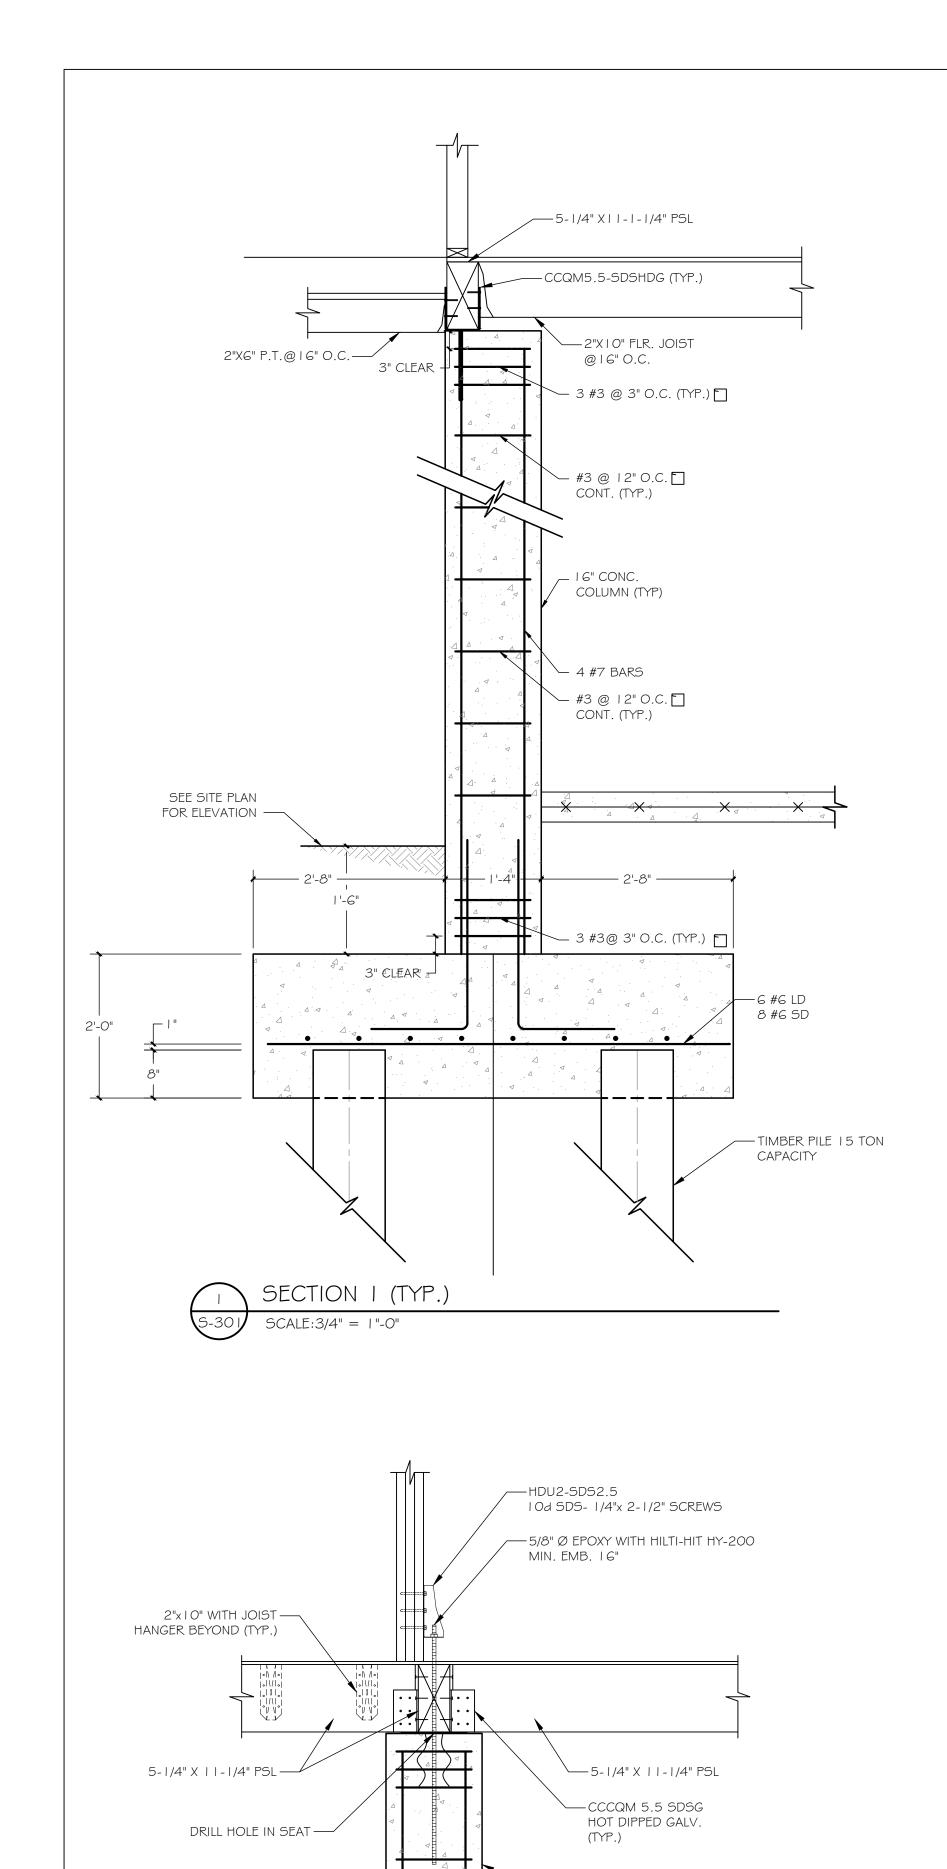



—16" 🗍 CONC. COLUMN


SECTION 2


SCALE:3/4" = 1"-0"


### CHECK SPEC FOR PAINTING STEEL

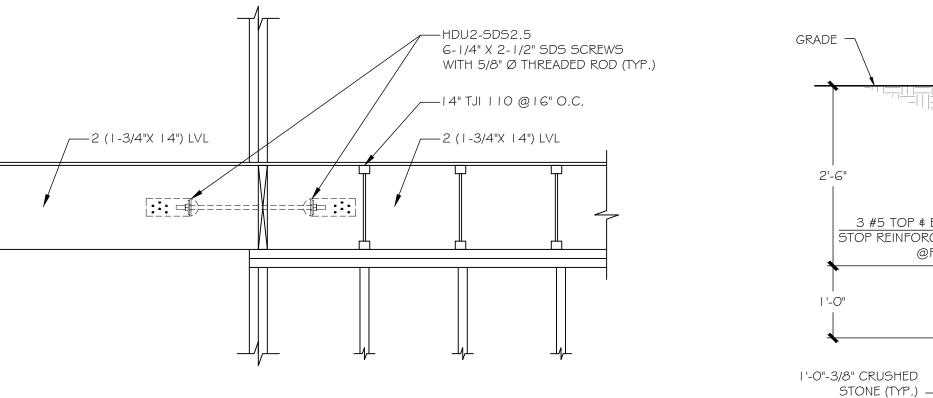





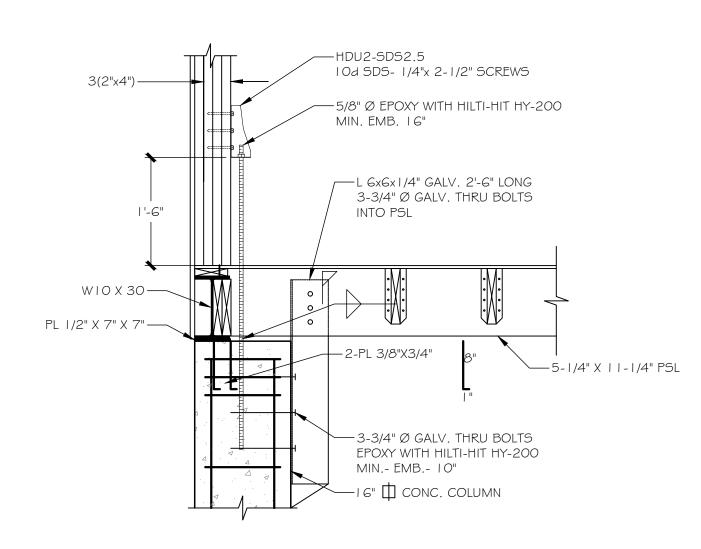

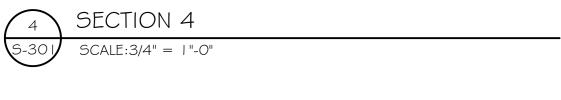

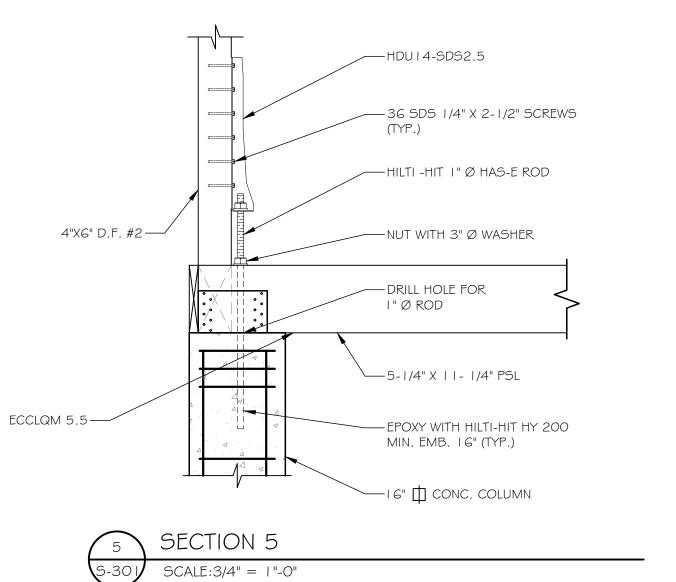

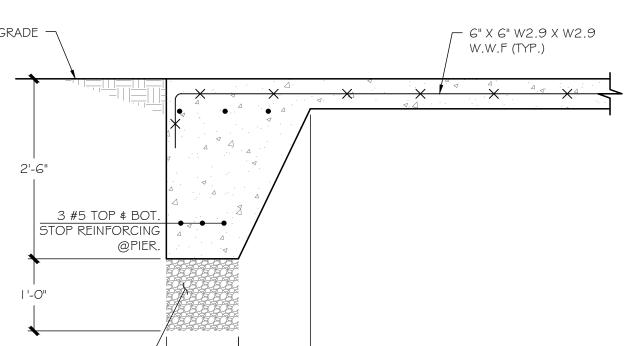




NOTES:

ISSUED FOR BIDDING

REVISIONS

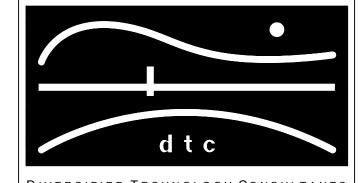

DIVERSIFIED TECHNOLOGY CONSULTANTS

2321 WHITNEY AVE HAMDEN CT 06518

203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT


SECTIONS

DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:

 SCALE: 3/4"=1'0"
 DRAWN BY:
 R.E.M


 DATE: 12/9/2015
 CHECKED BY:
 F.C

SHEET

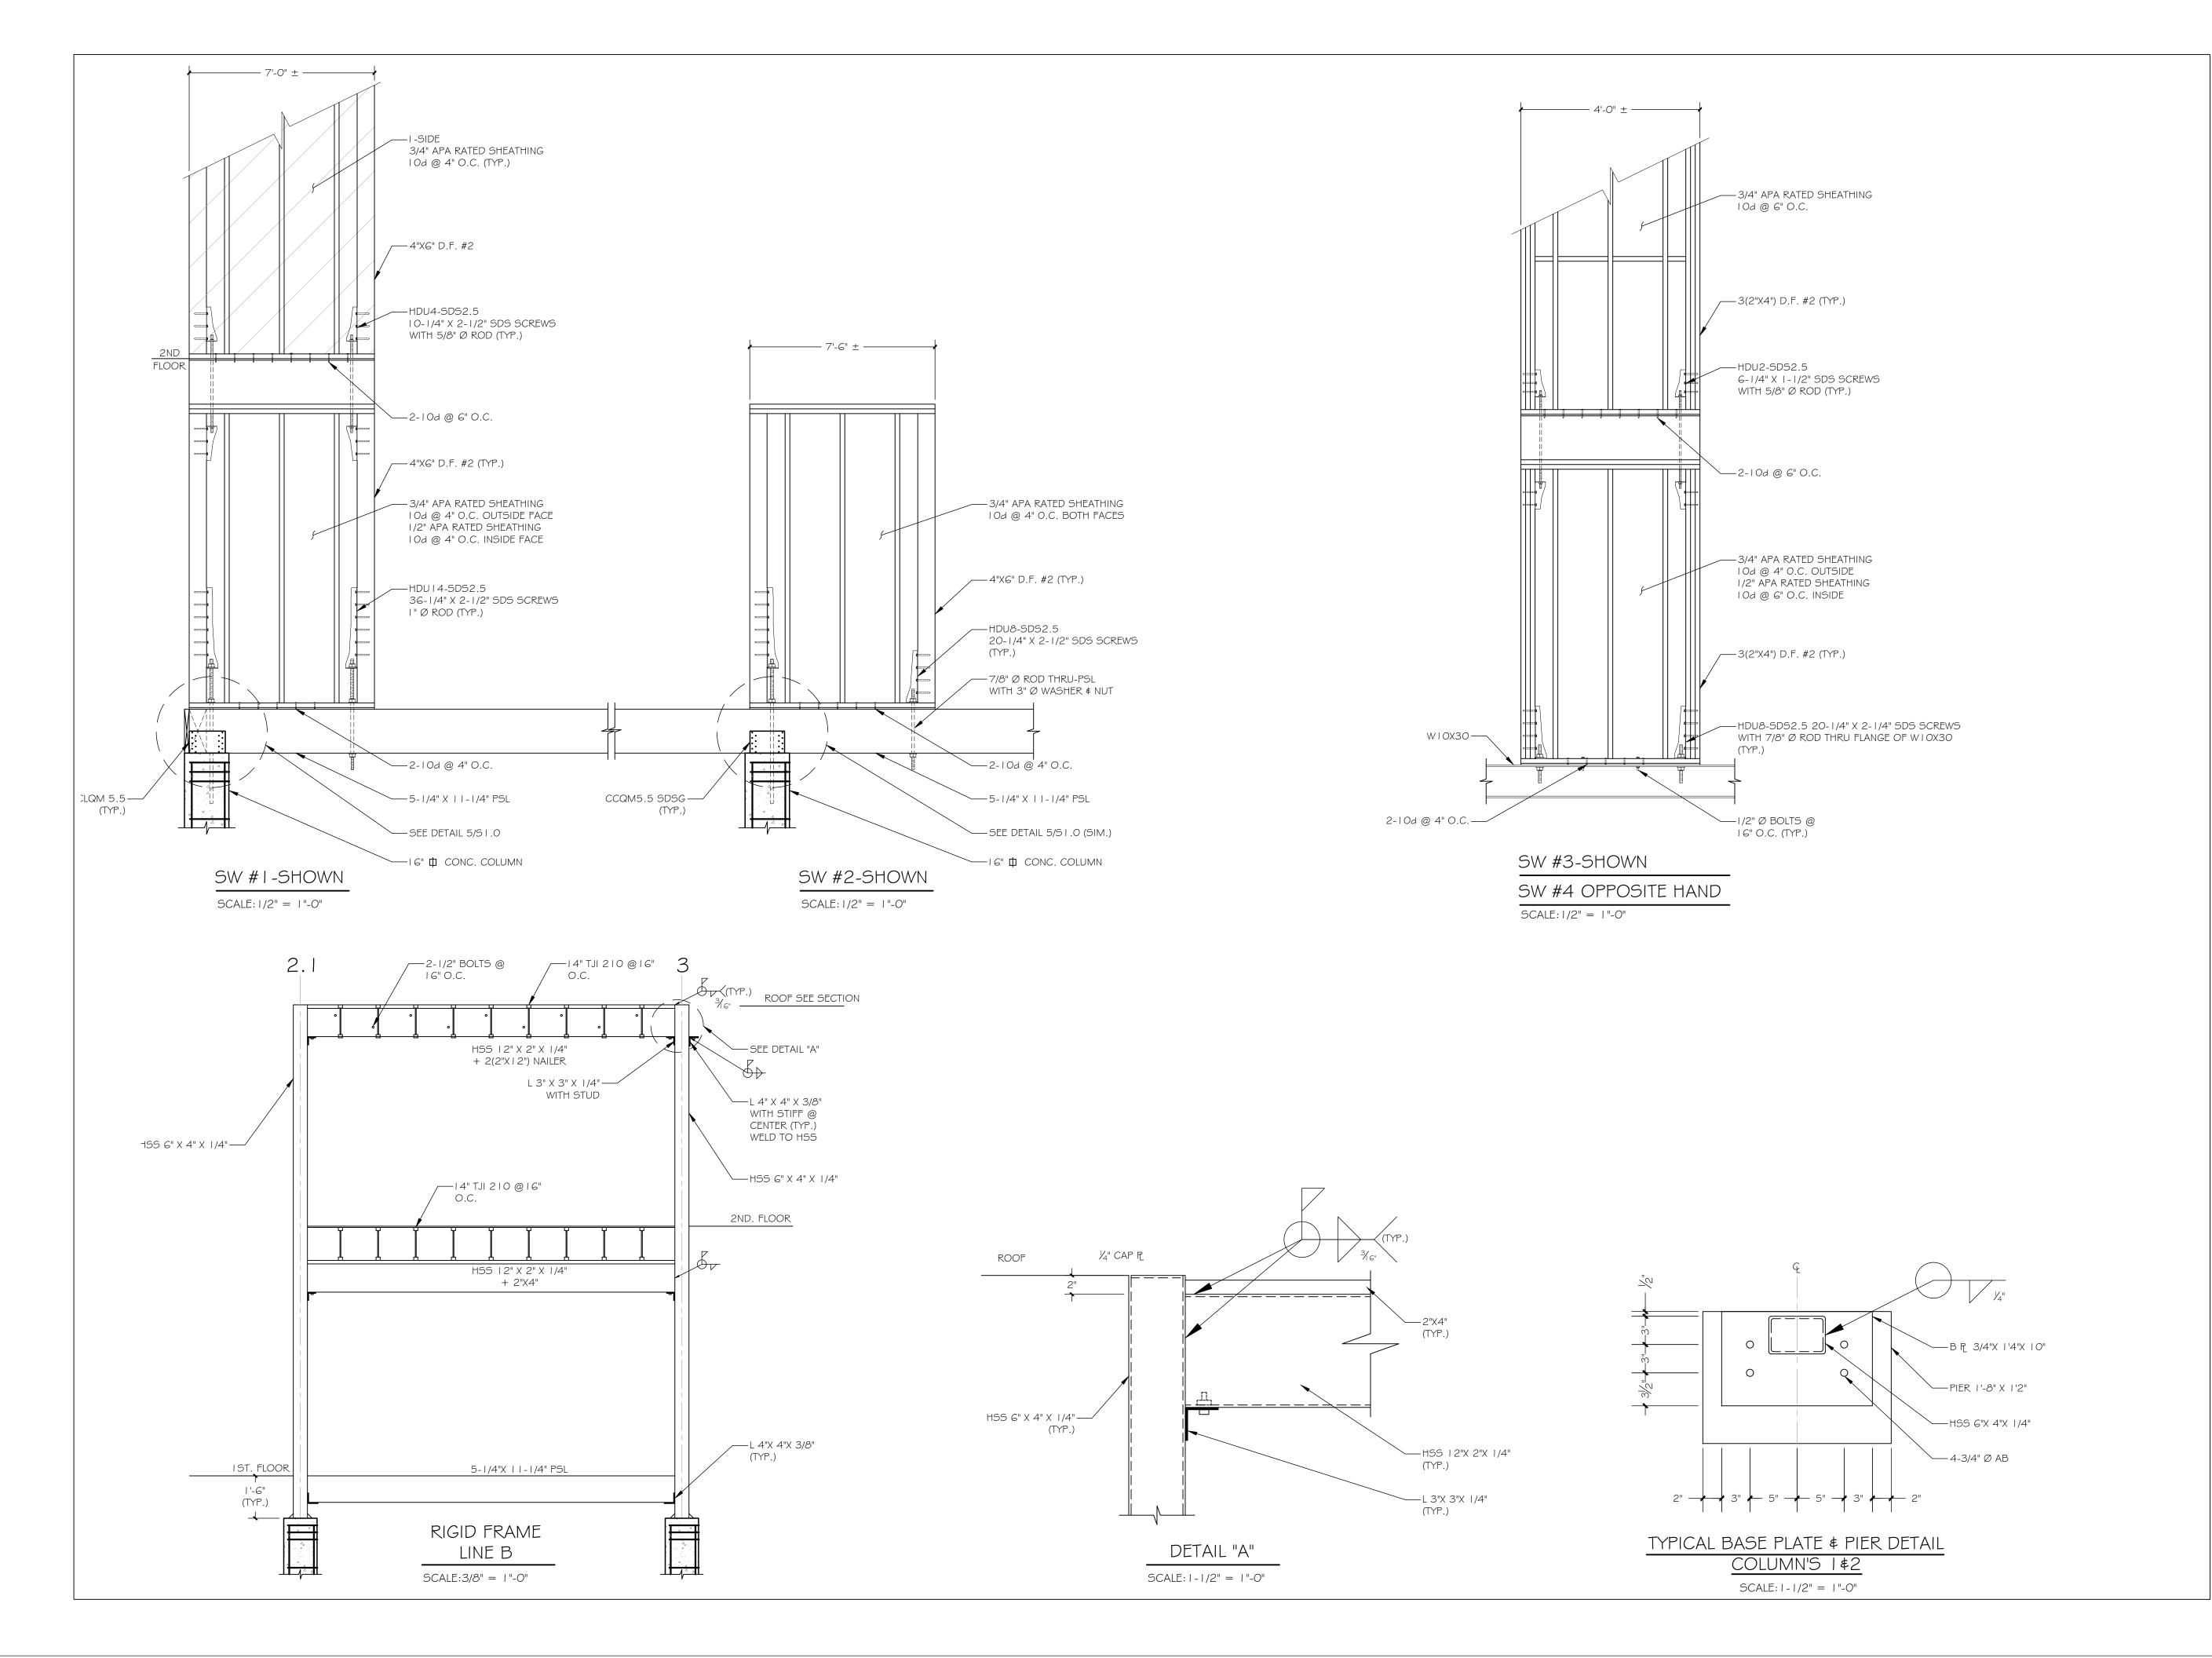

ISSUED FOR BIDDING

REVISIONS

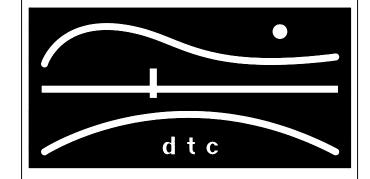

DIVERSIFIED TECHNOLOGY CONSULTANTS

2321 WHITNEY AVE HAMDEN CT 06518

203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT


**DETAILS** 

DTC PROJECT NUMBER: 13-449-026

DTC DRAWING FILE:


SCALE: VARIES
DATE: 12/9/2015

DRAWN BY: R.E.M
CHECKED BY: F.C

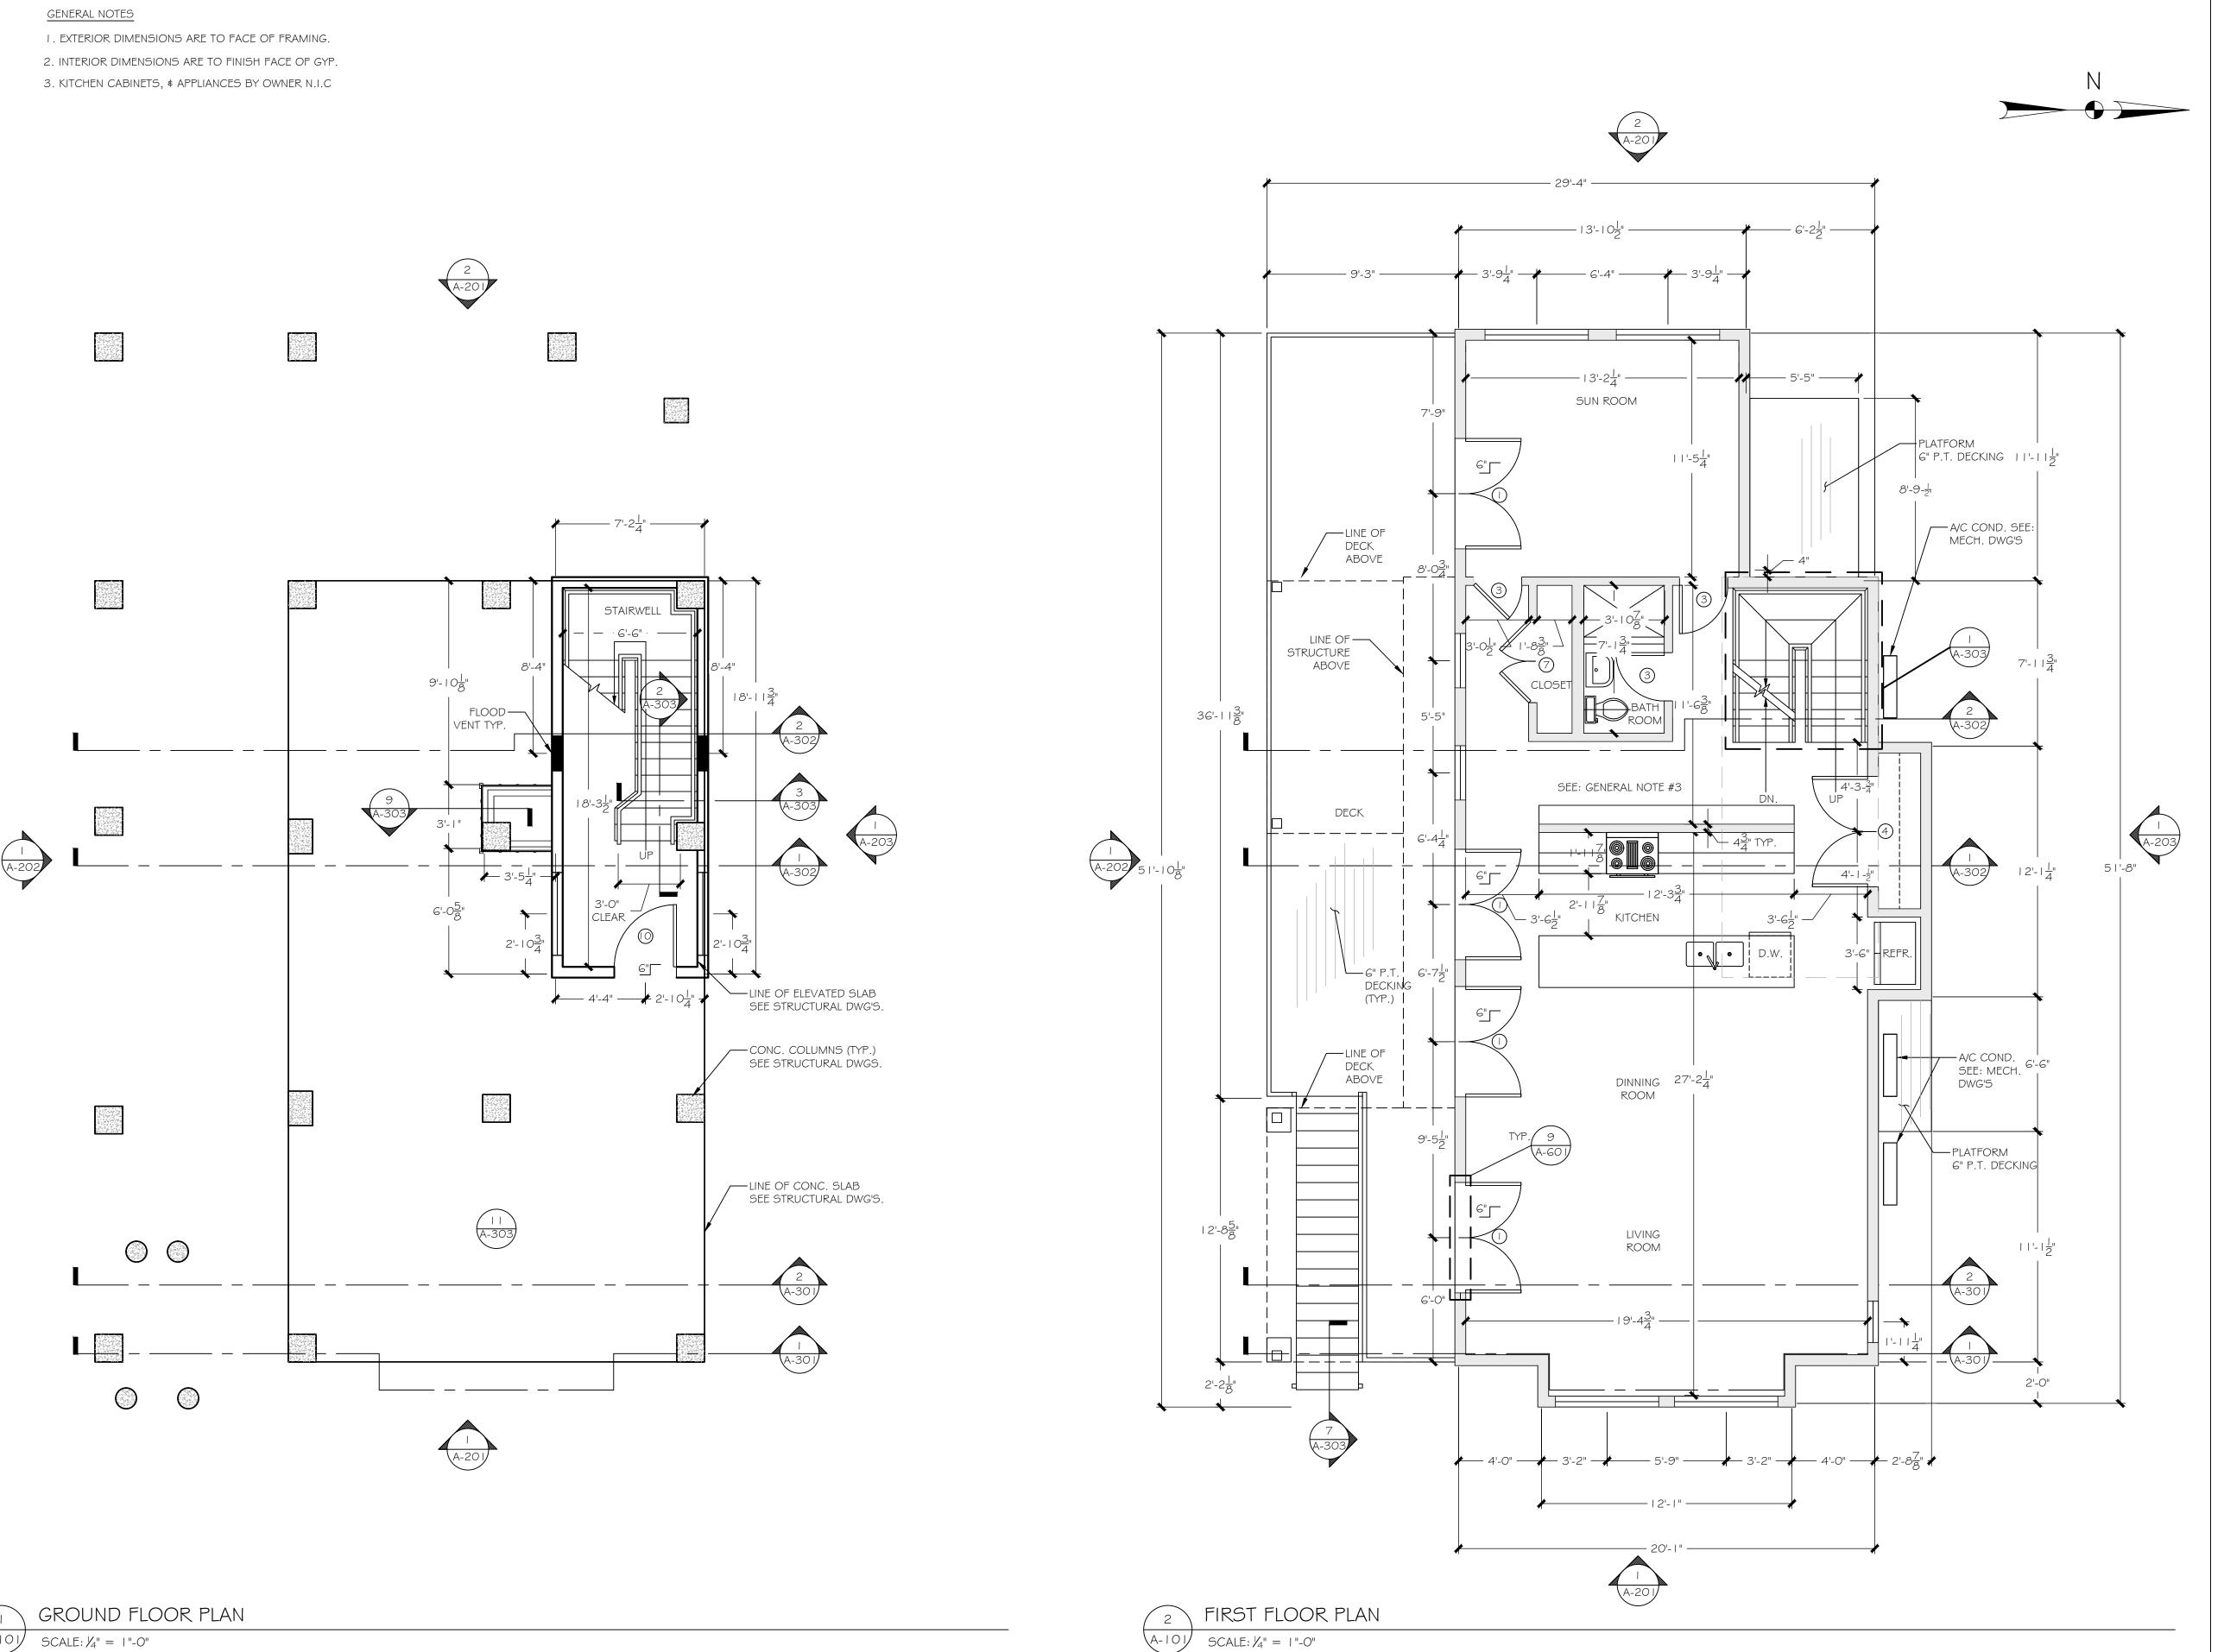

ISSUED FOR BIDDING

REVISIONS

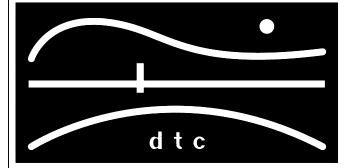

DIVERSIFIED TECHNOLOGY CONSULTANTS
2321 WHITNEY AVE HAMDEN CT 06518
203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT


GROUND & FIRST FLOOR PLANS


DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:


SCALE: 1/4"=1'-0"

DATE: 12/9/2015

DRAWN BY: R.E.M
CHECKED BY: R.M

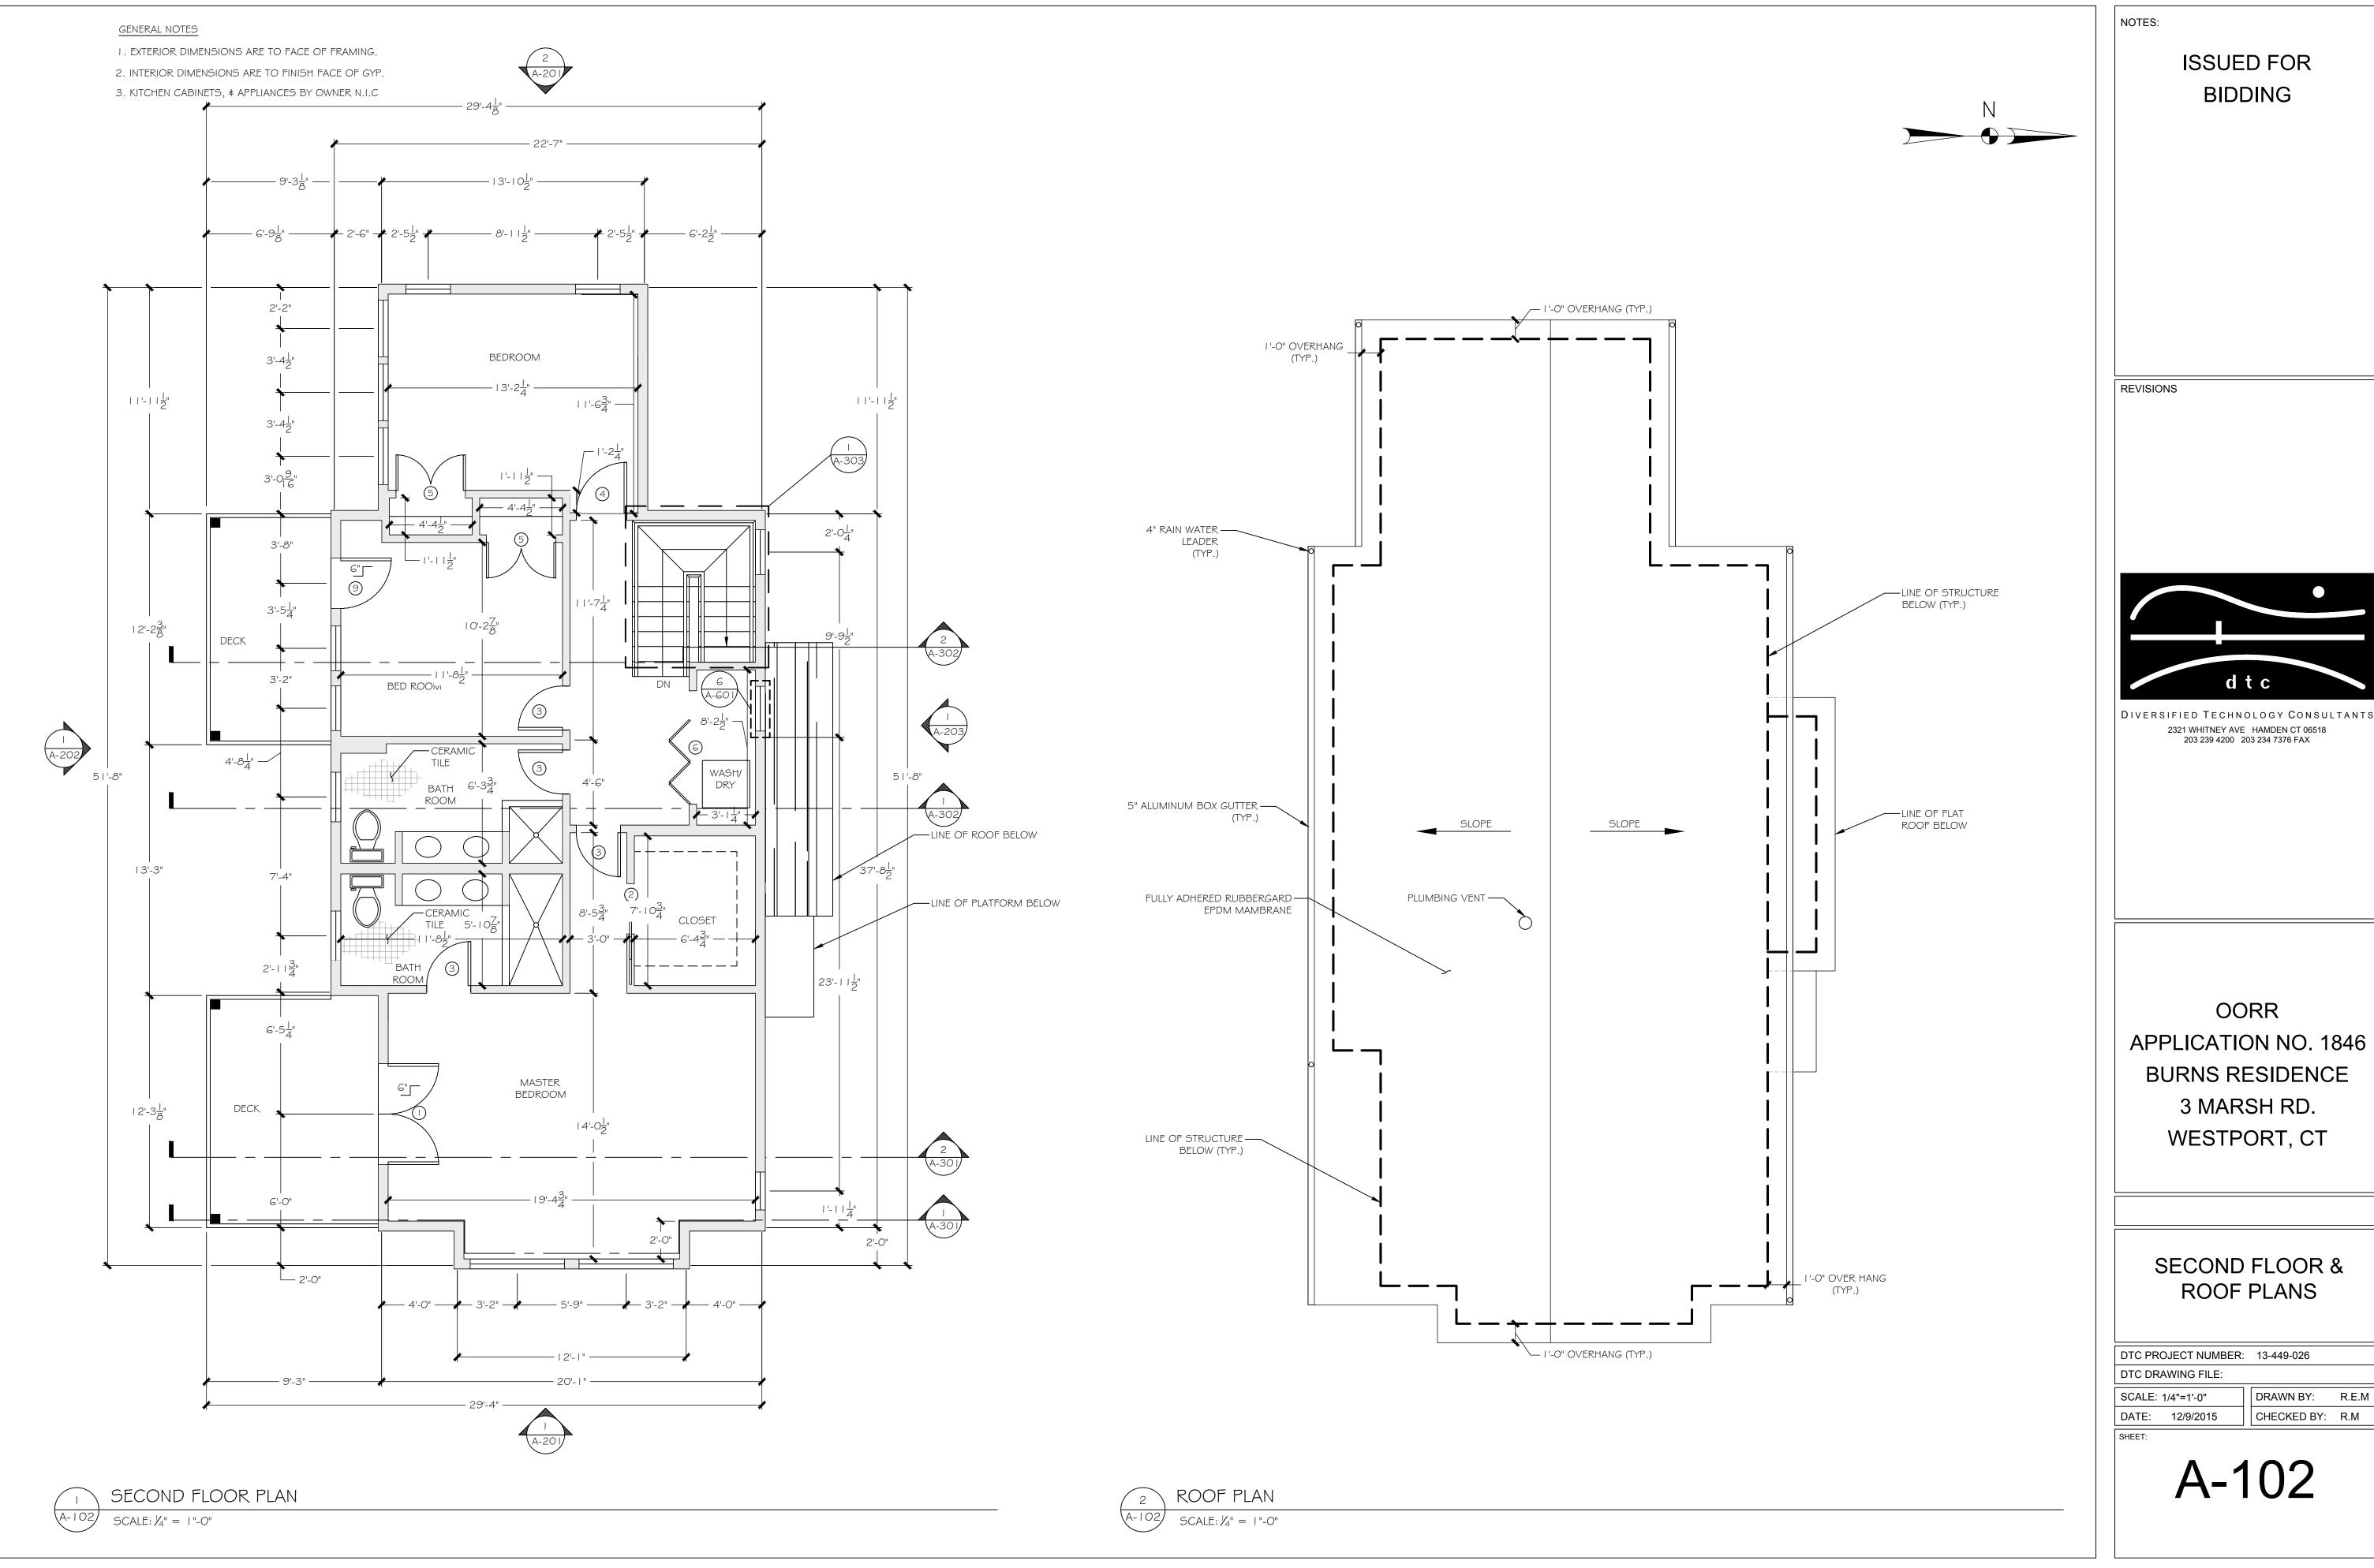


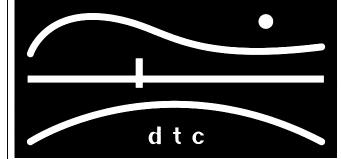

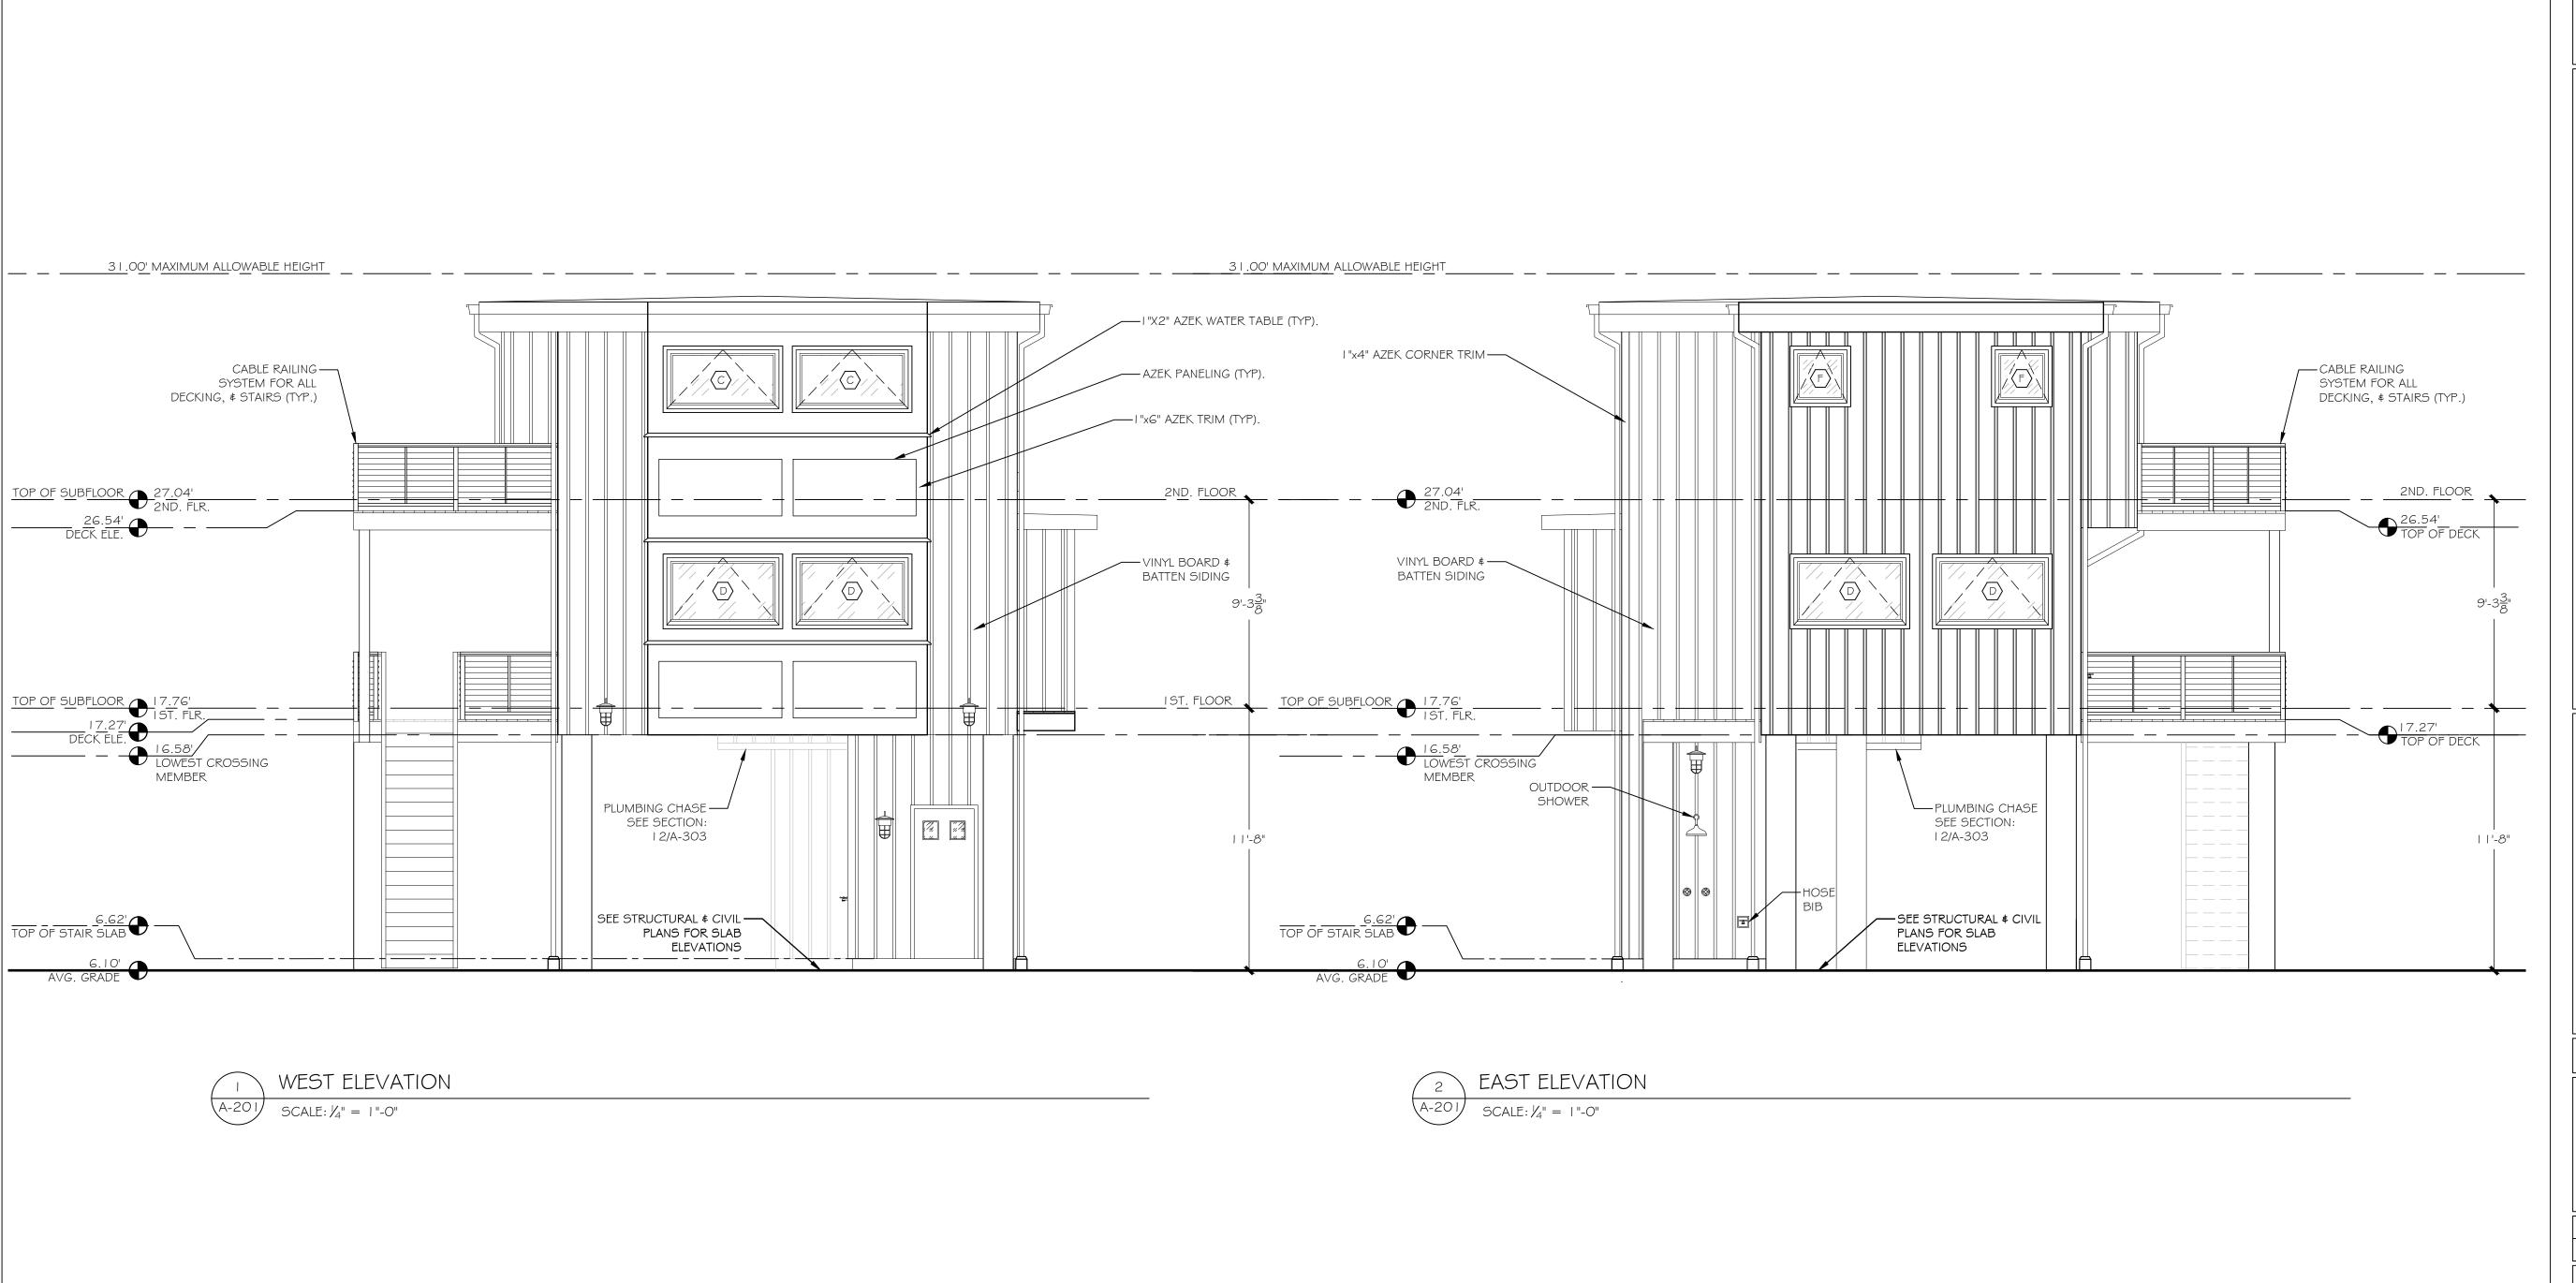

ISSUED FOR BIDDING

REVISIONS

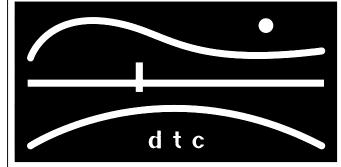

DIVERSIFIED TECHNOLOGY CONSULTANTS

2321 WHITNEY AVE HAMDEN CT 06518

203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

WEST & EAST ELEVATIONS


DTC PROJECT NUMBER: 13-449-026

DTC DRAWING FILE:

 SCALE:
 1/4"=1'-0"
 DRAWN BY:
 R.E.M

 DATE:
 12/9/2015
 CHECKED BY:
 R.M

SHEET:

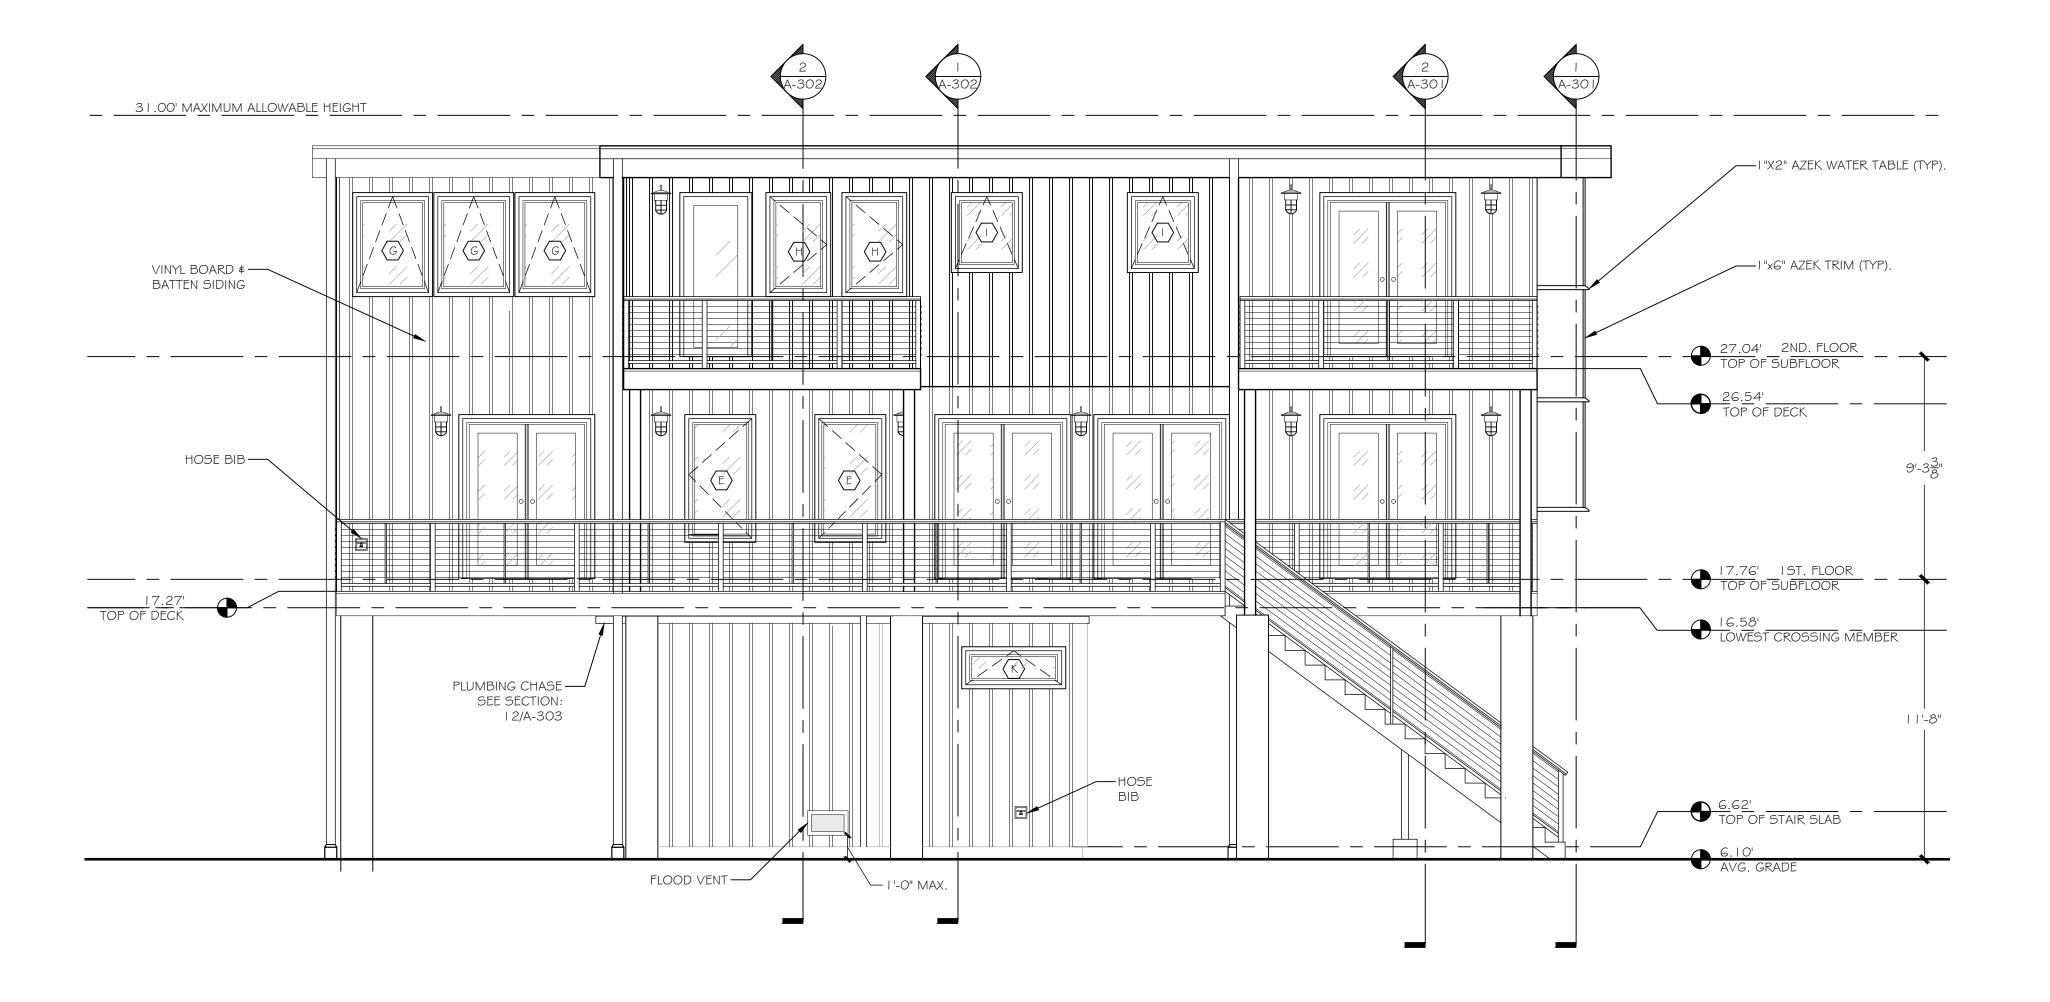


SOUTH ELEVATION

SCALE: 1/4" = 1"-0"

NOTES:

ISSUED FOR BIDDING

REVISIONS

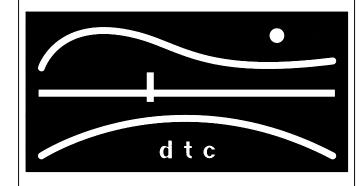

DIVERSIFIED TECHNOLOGY CONSULTANTS

2321 WHITNEY AVE HAMDEN CT 06518

203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

SOUTH ELEVATION

DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:

SCALE: 1/4"=1'-0"
DATE: 12/9/2015

'-0" DRAWN BY: R.E.M

/2015 CHECKED BY: R.M


SHEE

NORTH ELEVATION SCALE:  $\frac{1}{4}$ " = 1"-0"

NOTES:

ISSUED FOR BIDDING

REVISIONS

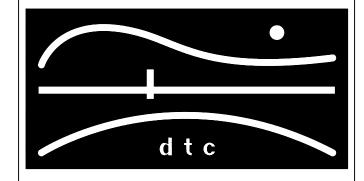

DIVERSIFIED TECHNOLOGY CONSULTANTS 2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX


OORR APPLICATION NO. 1846 **BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT

> NORTH **ELEVATION**

DTC PROJECT NUMBER: 13-449-026 DTC DRAWING FILE:

SCALE: 1/4"=1'-0"

DRAWN BY: R.E.M CHECKED BY: R.M DATE: 12/9/2015

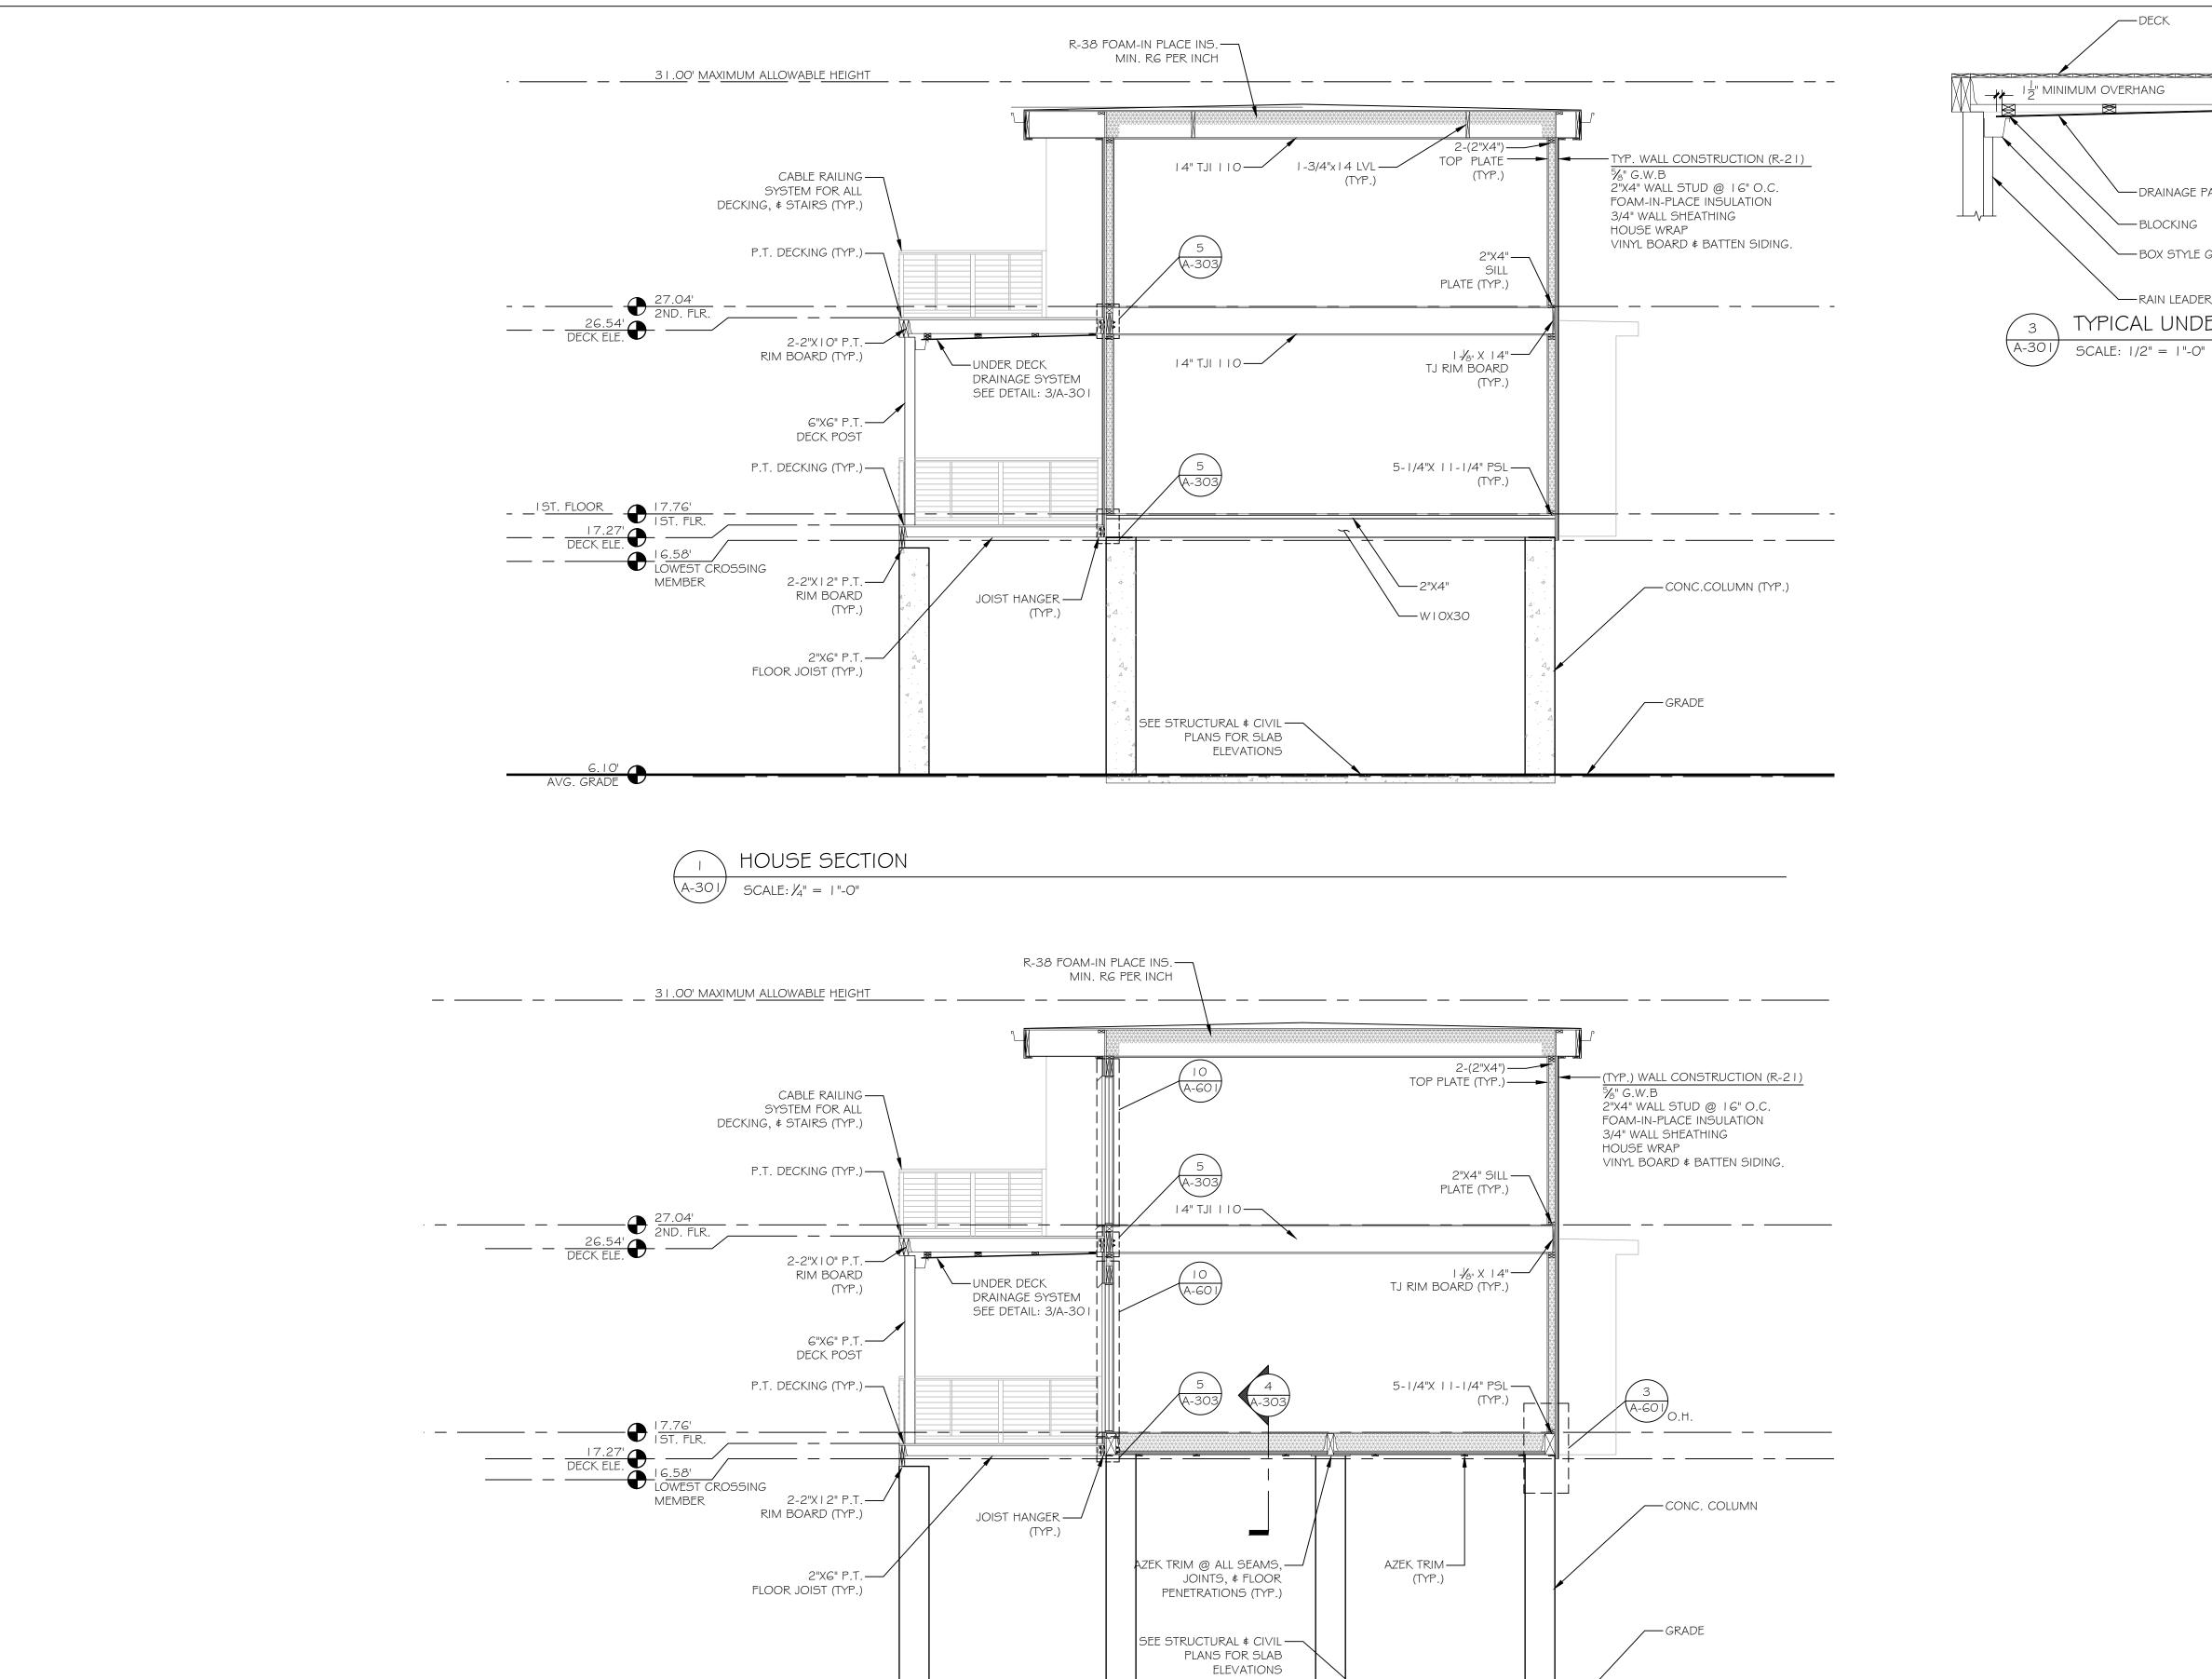

HOUSE SECTION


 $SCALE: \frac{1}{4} = 1 -0$ 

--- DRAINAGE PANEL -BLOCKING BOX STYLE GUTTER RAIN LEADER TYPICAL UNDER DECK DRAINAGE

NOTES:

ISSUED FOR BIDDING

REVISIONS

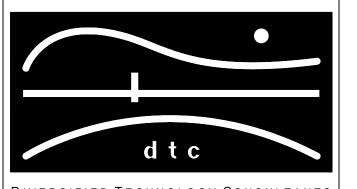

DIVERSIFIED TECHNOLOGY CONSULTANTS 2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX


OORR **APPLICATION NO. 1846 BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT

> HOUSE SECTIONS


DTC PROJECT NUMBER: 13-449-026

DTC DRAWING FILE:

DRAWN BY: R.E.M SCALE: 1/4"=1'-0" DATE: 12/9/2015 CHECKED BY: R.M

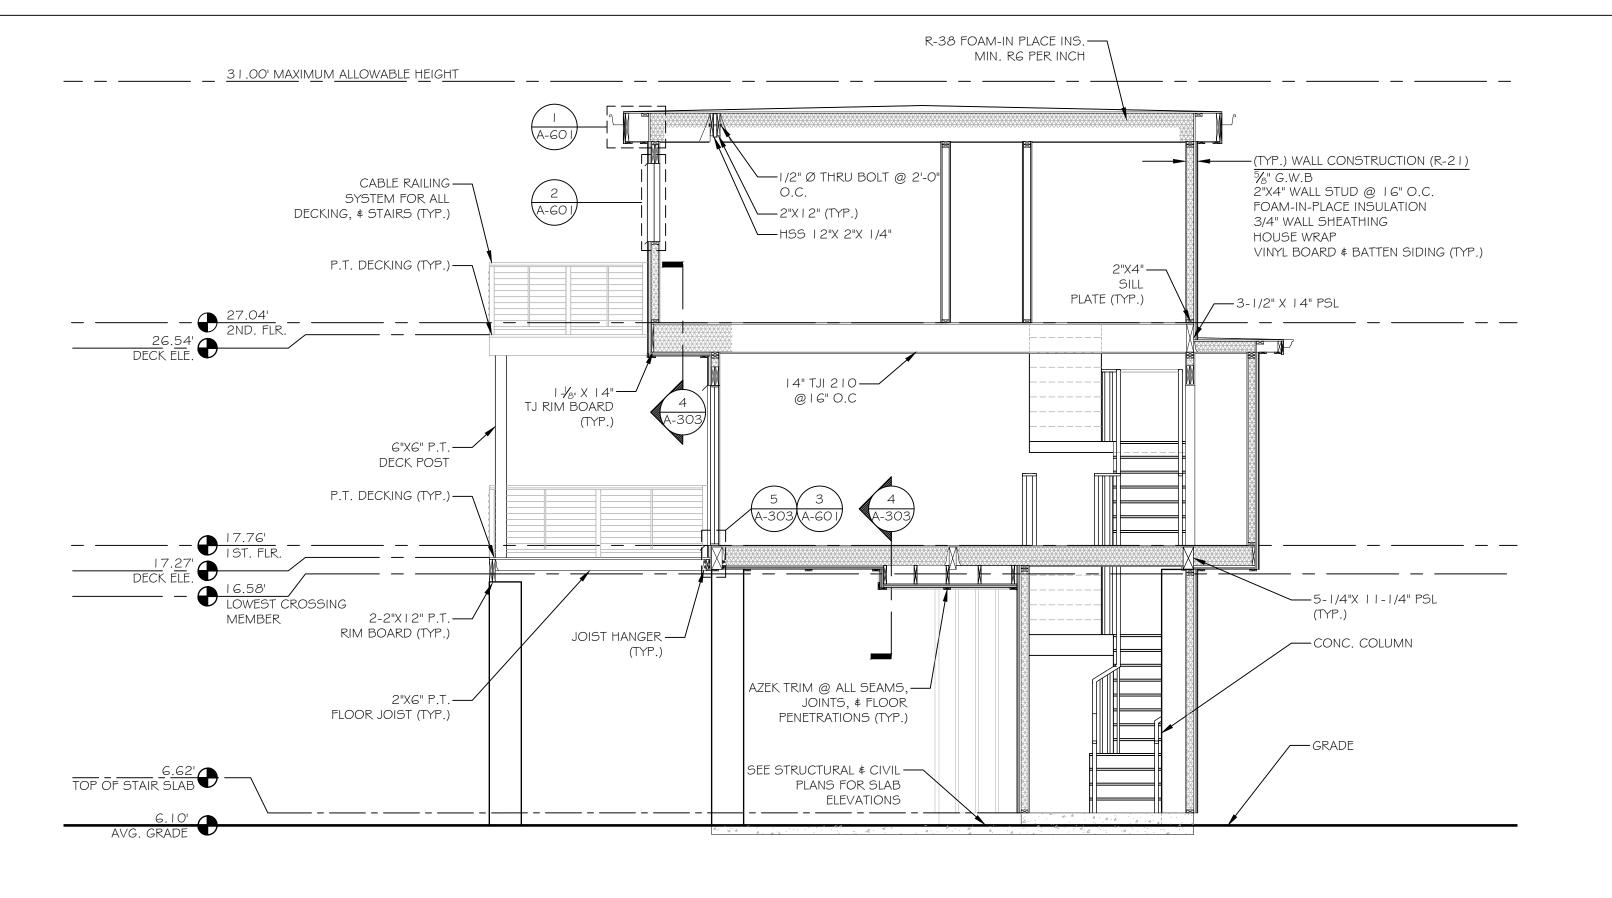




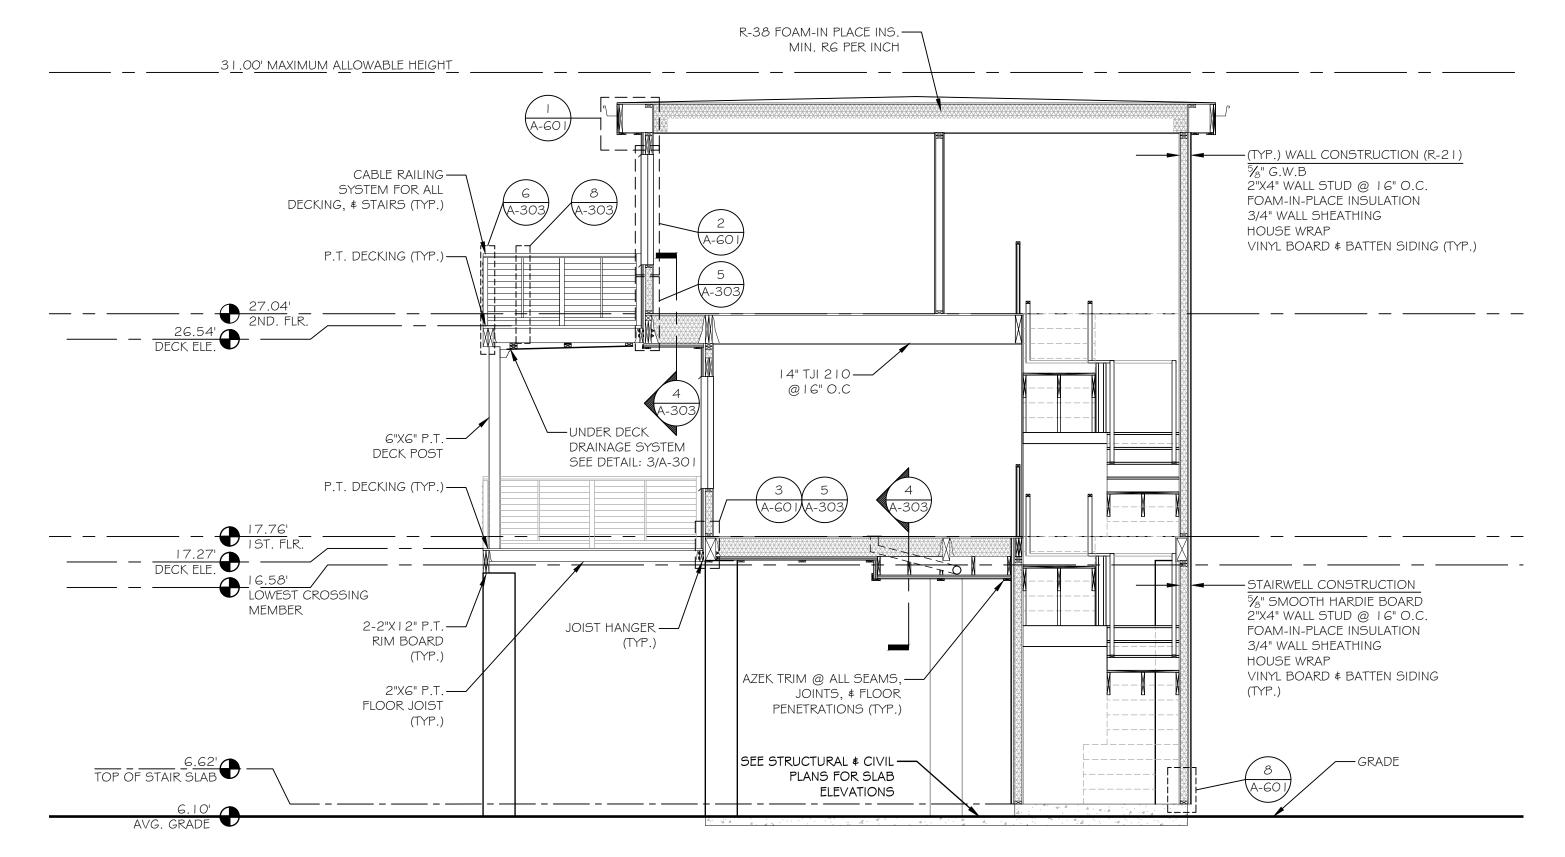



ISSUED FOR BIDDING

REVISIONS

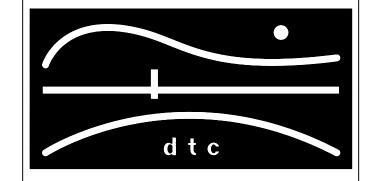

DIVERSIFIED TECHNOLOGY CONSULTANTS

2321 WHITNEY AVE HAMDEN CT 06518

203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

HOUSE SECTIONS

DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:


SCALE: 1/4"=1'-0"


DATE: 12/9/2015

1/4"=1'-0" DRAWN BY: R.E.M

12/9/2015 CHECKED BY: R.M

SHEET

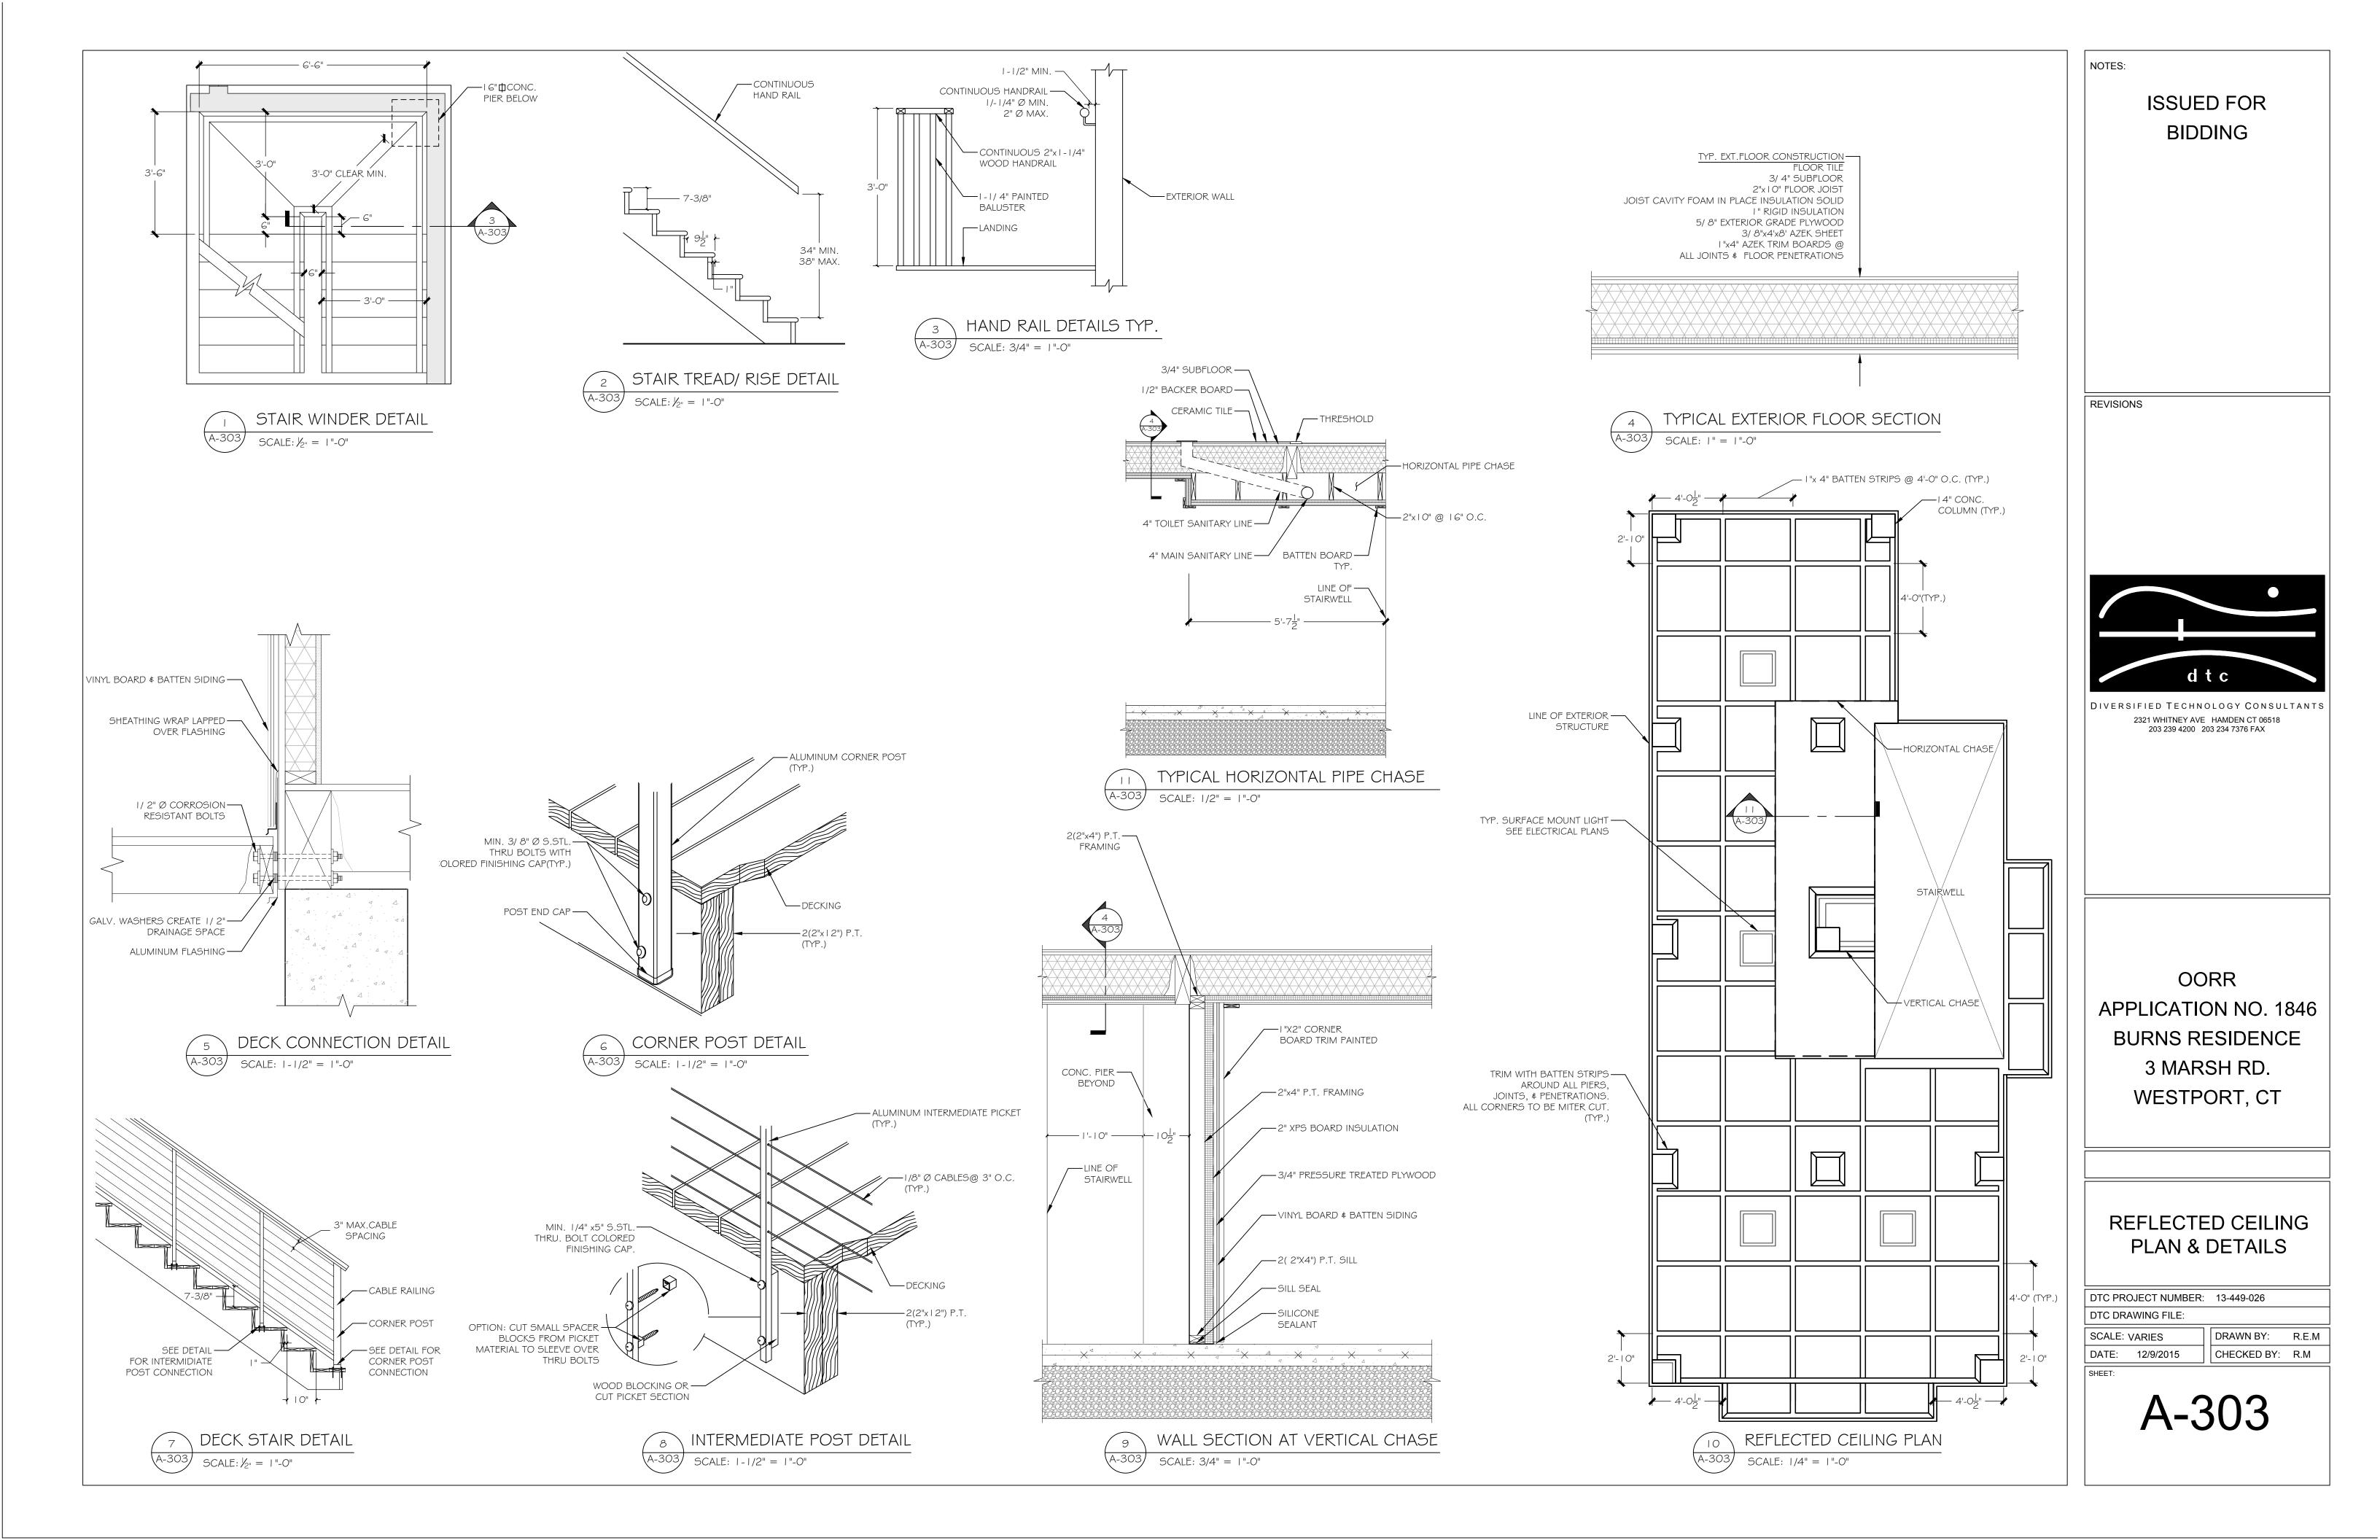

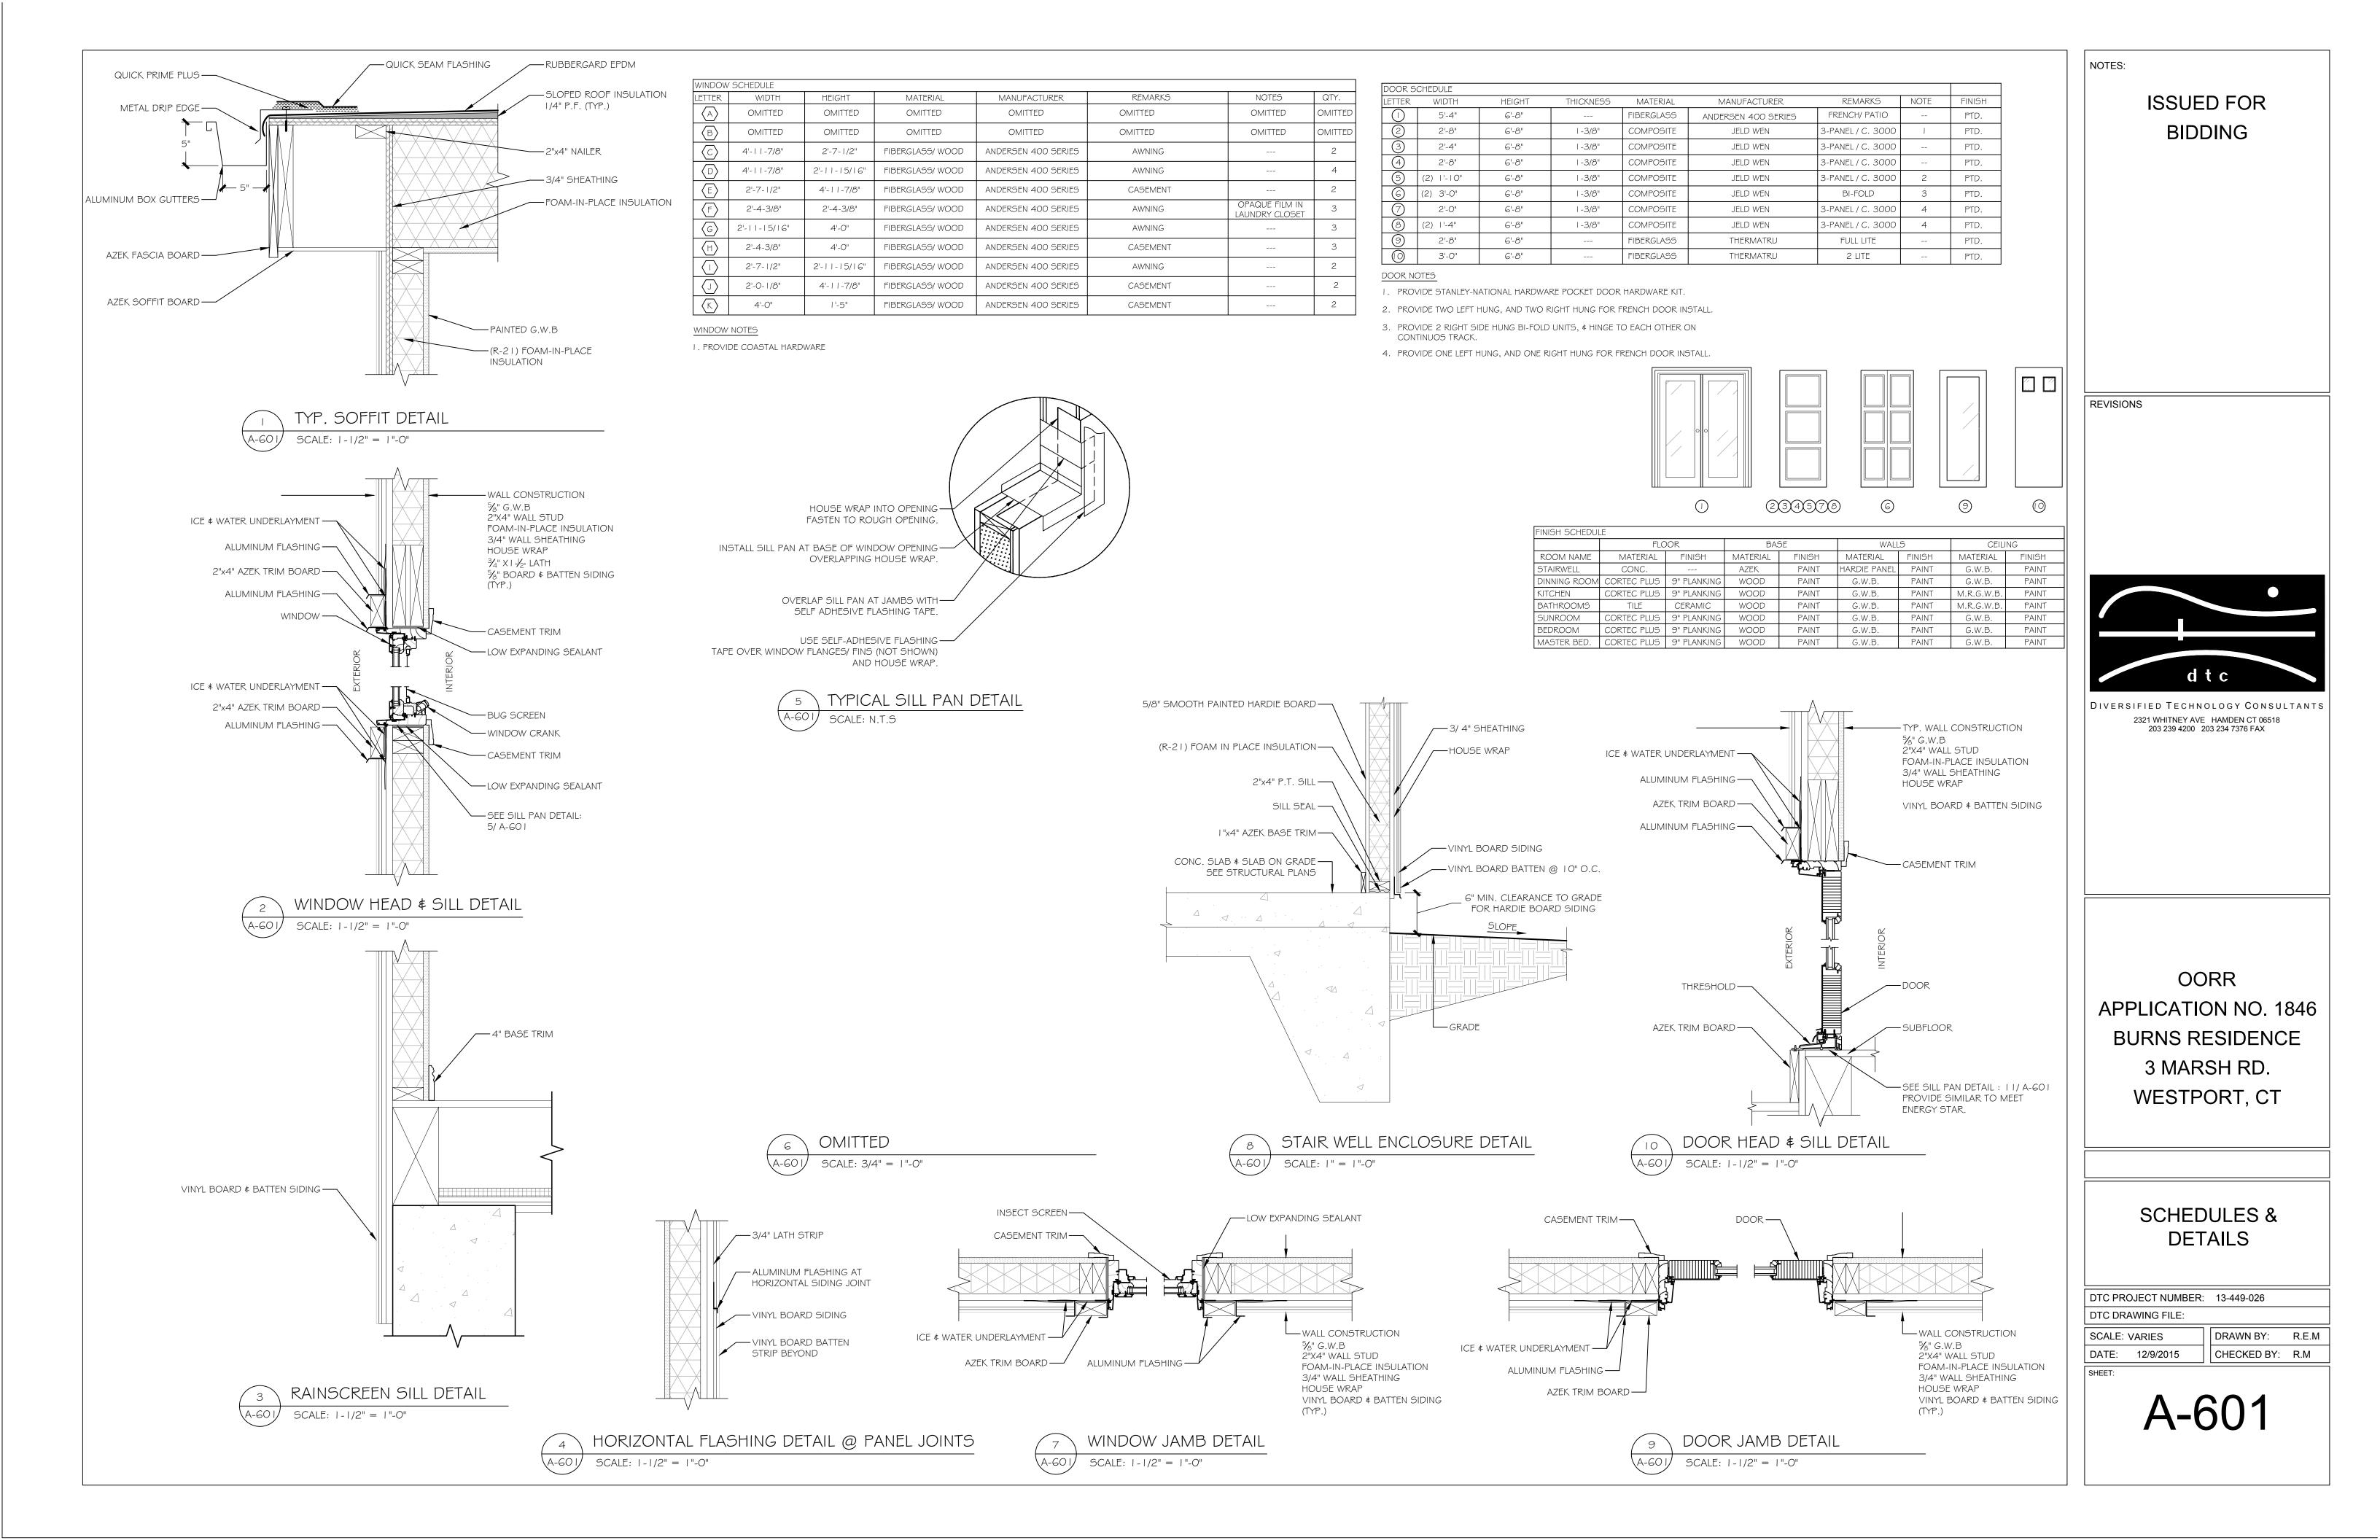

#### PLUMBING GENERAL NOTES

- THE CONTRACTOR SHALL BECOME THOROUGHLY FAMILIAR WITH THE PROJECT DOCUMENTS OF ALL TRADES. THE DRAWINGS ARE DIAGRAMMATIC AND SHOW THE GENERAL ARRANGEMENT OF EQUIPMENT AND PIPING. THE CONTRACTOR SHALL COORDINATE THE EXACT LOCATION OF EQUIPMENT AND PIPING INSTALLATION WITH ALL TRADES BEFORE COMMENCING WORK.
- 2. THIS CONTRACT SHALL INCLUDE ALL THE NECESSARY PIPING, FITTINGS, TRANSITIONS ETC. AS NECESSARY TO INSTALL PLUMBING SYSTEM, AND TO AVOID ANY CONFLICTS WITH OTHER TRADES AND THE BUILDING
- 3. IT IS NOT THE INTENT OF THE DRAWINGS TO SHOW INDIVIDUAL BRANCH PIPING TO EACH PLUMBING FIXTURE; ONLY THE BRANCH PIPING TO GROUPS OF FIXTURES IS INDICATED. THE ENTIRE PLUMBING SYSTEM SHALL BE FULLY OPERATIONAL AND READY FOR BENEFICIAL USE BEFORE THE JOB IS CONSIDERED COMPLETE. I. REFER TO LATEST ARCHITECTURAL PLANS FOR ELEVATIONS, SECTIONS, DETAILS, MOUNTING HEIGHTS,
- LOCATION OF PLUMBING FIXTURES. ALL HANDICAPPED DESIGNATED FIXTURES SHALL BE INSTALLED IN ACCORDANCE WITH ANSI AND ADA STANDARDS.
- . DO NOT SCALE DRAWINGS. CONTRACTOR SHALL VERIFY ALL DIMENSIONS & CONDITIONS IN THE FIELD AND SHALL NOTIFY THE ENGINEER IMMEDIATELY OF ANY & ALL DISCREPANCIES.
- . IT IS NOT INTENDED THAT THE DRAWINGS SHOW EVERY PIPE, FITTING, RISE/DROP OR DETAIL. SYSTEM &COMPONENTS SHALL BE INSTALLED ACCORDING TO THE INTENT AND MEANING OF CONTRACT DOCUMENTS AND IN ACCORDANCE WITH GOOD PRACTICE.
- CONTRACTOR IS RESPONSIBLE TO PROVIDE COMPLETE AND OPERATIONAL SYSTEMS WITH FACILITIES AND SERVICES TO MEET REQUIREMENTS INDICATED AND IN ACCORDANCE WITH APPLICABLE CODES AND
- EQUIPMENT AND COMPONENTS HAVING EQUAL PERFORMANCE CHARACTERISTICS BY OTHER MANUFACTURERS MAY BE CONSIDERED, PROVIDED DEVIATIONS IN DIMENSIONS, OPERATION AND OTHER CHARACTERISTICS DO NOT CHANGE DESIGN CONCEPT OR INTENDED PERFORMANCE AS JUDGED BY THE
- ENGINEER. BURDEN OF PROOF OF EQUALITY OF PRODUCTS IS ON THE CONTRACTOR. 9. CONTRACTOR IS RESPONSIBLE FOR THE SAFEKEEPING OF HIS OWN PROPERTY ON THE JOB SITE. OWNER ASSUMES NO RESPONSIBILITY FOR THE PROTECTION OF PROPERTIES AGAINST FIRE, THEFT AND
- ENVIRONMENTAL CONDITIONS. 10. CONTRACTOR IS RESPONSIBLE FOR PROPERLY PROTECTING OWNER'S PROPERTY AND EQUIPMENT FROM
- INJURY, AND DAMAGE TO SAME SHALL BE REPLACED BY CONTRACTOR. 11.CONTRACTOR IS TO CLEAN JOB SITE DAILY AND REMOVE FROM THE PREMISES ANY DIRT AND DEBRIS CAUSED
- BY THE PERFORMANCE OF THE WORK INCLUDED IN THIS CONTRACT. 12.ALL WORK TO BE PERFORMED IN A CLEAN AND WORKMANLIKE MANNER, CARE SHALL BE EXERCISED TO MINIMIZE ANY INCONVENIENCE OR DISTURBANCE TO OTHER AREAS OF THE BUILDING WHICH ARE TO REMAIN IN OPERATION. ISOLATE CONSTRUCTION AREAS BY MEANS OF TEMPORARY PARTITIONS AND/OR TARPS TO
- 13.CONTRACTOR IS RESPONSIBLE TO PROPERLY SECURE AREAS OF CONSTRUCTION AT THE END OF EACH WORKING DAY.
- 14.EQUIPMENT AND PIPING TO BE INSTALLED IN ACCORDANCE WITH SEISMIC REQUIREMENTS OF THE INTERNATIONAL BUILDING CODE.
- 15.CONTRACTOR IS RESPONSIBLE TO COORDINATE WITH ALL OTHER TRADES.
- 16.ALL EQUIPMENT SUPPORTS AND PIPE HANGERS TO BE CONNECTED FROM THE BUILDING STRUCTURE. 17.PROVIDE ACCESS PANELS/DOORS FOR ALL CONCEALED PLUMBING ITEMS REQUIRING ACCESS, COORDINATE
- WITH DIVISION 8. 18.ALL BRANCH WATER PIPES TO HAVE STOP VALVES AT EACH PLUMBING FIXTURE.
- 19.INSULATE COLD WATER AND HOT WATER PIPING.

FUNCTIONING, PLUMBING SYSTEM.

KEEP DUST AND DIRT WITHIN WORK AREA.

- 20.EVERY FIXTURE SHALL BE PROPERLY PIPED TO WATER, SANITARY, WASTE, AND VENT SYSTEMS. REFER TO
- THE PLUMBING SCHEDULES ON MEP DRAWINGS FOR INDIVIDUAL PIPE SIZES TO EACH FIXTURE. 21.WHERE AN INACCESSIBLE CEILING IS INSTALLED (GYP BOARD OR EQUIVALENT), THE CONTRACTOR SHALL COORDINATE THE LOCATIONS OF ACCESS PANELS FOR ALL VALVES, CLEANOUTS, ETC., REQUIRING ACCESS,
- WITH THE ARCHITECT, PRIOR TO INSTALLATION OF SUCH DEVICES AND OTHER APPURTENANCES. 22.ALL PIPING IS TO BE RUN CONCEALED IN CEILINGS OR WALLS. PIPING IS TO BE EXPOSED ONLY WHERE NOTED ON DRAWINGS. IF CONTRACTOR CANNOT RUN PIPING CONCEALED, NOTIFY ENGINEER IMMEDIATELY TO
- 23.COORDINATE EXACT LOCATION OF ALL UNDERGROUND UTILITIES (WATER, GAS, SANITARY, ETC.) EXITING OR
- ENTERING THE BUILDING. COORDINATE ALL FOUNDATION WALL PENETRATIONS AND INVERT ELEVATIONS. 24.DOMESTIC WATER DROPS OR RISERS INSTALLED IN EXTERIOR WALLS, SHALL BE INSTALLED ON THE WARM
- SIDE OF THE BUILDING INSULATION, AND THE LOCATION SHALL BE MADE INFILTRATION FREE. 25.COORDINATE ALL PLUMBING EQUIPMENT REQUIRING POWER, FOR EXACT LOCATION AND POWER
- REQUIREMENTS WITH THE ELECTRICAL CONTRACTOR. 26.CONTRACTOR SHALL BE RESPONSIBLE FOR ALL ELBOWS, TEES, DROPS, AND MISCELLANEOUS PIPING DUE TO ELEVATION CHANGES, OBSTRUCTIONS, COORDINATION WITH OTHER TRADES, ETC. TO INSTALL A COMPLETE,

## LEGEND SYMBOL

 $\bowtie$ 

囚

SAN ———	SOIL OR WASTE ABOVE FLOOR OR GRADE
SAN	SOIL OR WASTE BELOW FLOOR OR GRADE
	VENT PIPING
	COLD WATER PIPING
	DOMESTIC HOT WATER PIPING
<b></b>	PIPING DIRECTION OF FLOW
	HT - HEAT TRACED & INSULATED PIPE

**DESCRIPTION** 

	DOMESTIC HOT WATER PIPING
<b>———</b>	PIPING DIRECTION OF FLOW
	HT - HEAT TRACED & INSULATED PIPE
RLL/RSL	REFRIGERANT PIPE
——ю	PIPING RISER UP
——————————————————————————————————————	PIPING RISER DOWN
c	CONDENSATE
<del></del>	TRAP
<del>_</del>	BALL VALVE
	CHECK VALVE
——————————————————————————————————————	UNION
<del></del> 3	CAP ON END OF PIPE
<del>-</del>	POINT OF CONNECTION
<del>\</del>	POINT OF DISCONNECT

THERMOSTATIC MIXING VALVE

PRESSURE REDUCING VALVE

CLEANOUT/WALL CLEANOUT

CONTROL VALVE

**BALANCING VALVE** 

#### ABBREVIATIONS

BB	BASEBOARD
CO	CLEANOUT
CTE	CONNECT TO EXISTING
CW	COLD WATER
HW	HOT WATER
HZ	HERTZ
IN	INCH
GPM	GALLONS PER MINUTE
MAX	MAXIMUM
MIN	MINIMUM
N	NEW
PH	PHASE
PRV	PRESSURE REDUCING VALVE
RF	RADIANT FLOOR
RLL	REFRIGERANT LIQUID LINE
RP	RADIANT PANEL
RSL	REFRIGERANT SUCTION LINE
TEMP	TEMPERATURE
TMV	THERMOSTATIC MIXING VALVI
TYP	TYPICAL
W	WASTE

WALL CLEANOUT

#### **HVAC GENERAL NOTES**

- NOTES BELOW ARE NOT INTENDED TO REPLACE SPECIFICATIONS. SEE SPECIFICATIONS FOR REQUIREMENTS IN ADDITION TO
- CONTRACTOR SHALL VISIT THE SITE AND BECOME INFORMED AS TO THE NATURE AND SCOPE OF WORK REQUIRED BY
- PROVIDE ALL REQUIRED MATERIALS, LABOR, EQUIPMENT, AND SERVICES NECESSARY FOR THE INSTALLATION OF THE WORK AS
- REFER TO AND CAREFULLY CHECK ARCHITECTURAL, ELECTRICAL, PLUMBING DRAWINGS AND DETAILS, NOTES, LOCATIONS WHERE WALLS, PARTITIONS, CEILINGS, AND OTHER SURFACES ARE FURRED, LOCATIONS OF SHAFTS, SOFFITS, AND CONFLICTS WITH WORK OF OTHER TRADES, AND ARRANGE WORK ACCORDINGLY. FURNISH ALL OFFSETS, DAMPERS, CONNECTORS, ETC., REQUIRED TO MEET SUCH CONDITIONS.
- CONTRACTOR SHALL OBTAIN AND PAY FOR ALL REQUIRED PERMITS AND ARRANGE FOR ALL REQUIRED INSPECTIONS IN
- ACCORDANCE WITH STATE AND LOCAL GOVERNING CODES.
- THE TERM "PROVIDE" SHALL MEAN "TO FURNISH, INSTALL, AND CONNECT COMPLETELY".
- DRAWINGS WHICH REQUIRES ANY REDESIGN OF THE STRUCTURE, PARTITIONS, FOUNDATIONS, PIPING, WIRING OR ANY OTHER PART OF THE MECHANICAL, ELECTRICAL OR ARCHITECTURAL LAYOUT, ALL SUCH REDESIGN AND ALL NEW DRAWINGS AND DETAILING REQUIRED THEREFORE, SHALL BE PREPARED AT THE CONTRACTOR'S EXPENSE AND ARE SUBJECT TO THE REVIEW AND APPROVAL OF THE OWNER OR HIS AUTHORIZED REPRESENTATIVE. OWNER RESERVES THE RIGHT TO HAVE THE
- ARCHITECT OR ENGINEER OF HIS CHOICE PREPARE ANY REDESIGN WORK.
- EQUIPMENT ARE TO BE INSTALLED TO INSURE SUITABILITY AND CHECK NEEDED SPACE FOR PLACEMENT AND CLEARANCES.
- ELEMENTS AND BUILDING UTILITIES.
- DISCREPANCIES ARE FOUNDED, NOTIFY ENGINEER BEFORE PROCEEDING WITH WORK.
- 16. FOLLOW MANUFACTURER'S RECOMMENDATIONS FOR INSTALLATION OF PROVIDED EQUIPMENT.
- 18. HVAC DRAWINGS DO NOT NECESSARY SHOW ALL CONDITIONS OF BUILDING. CONTRACTOR TO USE ALL DRAWINGS AND SPECIFICATIONS OF CONTRACT DOCUMENTS AND INSPECTION OF FIELD CONDITIONS FOR DIVISION 23.
- 19. HVAC PLANS, DETAILS AND ONE LINE DIAGRAMS SHOW THE GENERAL LOCATION AND ARRANGEMENT OF THE SYSTEM. THESE ARE DIAGRAMMATIC AND DO NOT SHOW ALL OFFSETS, HANGERS, ACCESS DOORS, ETC. WHICH THE CONTRACTOR MUST
- 20. ALL WORK IN INTERIOR FINISHED SPACES EXCEPT INDICATED IS TO BE CONCEALED ABOVE CEILING. PROVIDE ALL NECESSARY CUTTING, PATCHING, REPAINTING AND/OR REPLACEMENT OF FINISHES AS REQUIRED TO PERFORM COORDINATE WITH OTHER
- 21. IF MANUFACTURER OF EQUIPMENT REQUIRES LARGER CAPACITY CIRCUITRY AND/OR EQUIPMENT THE CONTRACTOR SHALL PROVIDE SUCH CAPACITY AND/OR EQUIPMENT UNDER THIS CONTRACT AT NO COST TO THE OWNER.
- 22. DO NOT SCALE DRAWINGS. CHECK EXISTING SPACE CONDITIONS AT THE JOB SITE.
- 24. ALL PENETRATIONS THRU WALLS, ROOF, AND FLOORS TO BE COORDINATED BEFORE SITE WORK EXECUTION WITH
- 25. THERMOSTAT AND TEMPERATURE SENSOR LOCATIONS TO BE COORDINATED WITH INTERIOR WALL LAYOUT, REFER TO
- 26. CONTRACTOR SHALL SELECT AND PROVIDE EXPANSION JOINTS OR EXPANSION LOOPS AND ANCHORS AS REQUIRED TO
- 27. ELECTRICAL CHARACTERISTICS FOR MECHANICAL EQUIPMENT: EQUIPMENT OF HIGHER ELECTRICAL CHARACTERISTICS MAY BE FURNISHED PROVIDED SUCH PROPOSED EQUIPMENT IS APPROVED IN WRITING AND CONNECTING ELECTRICAL SERVICES,
- SPECIFIED, EQUIPMENT SHALL COMPLY WITH REQUIREMENTS. 3. SHOP DRAWINGS: DETAIL MAJOR ELEMENTS. COMPONENTS. MECHANICAL EQUIPMENT AND MATERIALS IN RELATIONSHIPS WITH OTHER SYSTEMS, INSTALLATIONS, AND BUILDING COMPONENTS. SHOW SPACE REQUIREMENTS FOR INSTALLATION AND
- A. PLANNED PIPING LAYOUT, INCLUDING VALVE AND SPECIALTY LOCATIONS AND VALVE-STEM MOVEMENT.
- C. CLEARANCES FOR SERVING AND MAINTAINING EQUIPMENT, ACCESSORIES, AND SPECIALTIES, INCLUDING SPACE FOR
- DISASSEMBLY REQUIRED BY PERIODIC MAINTENANCE. D. EQUIPMENT AND ACCESSORY SERVICE CONNECTIONS AND SUPPORT DETAILS.
- E. EXTERIOR WALL AND FOUNDATION PENETRATIONS.
- G. FLOOR PLANS, ELEVATIONS, AND DETAILS TO INDICATE PENETRATIONS, FLOORS, WALLS, AND CEILINGS AND THEIR
- RELATIONSHIP TO OTHER PENETRATIONS AND INSTALLATIONS. H. SCALE: MINIMUM 1/4"=1'-0" FOR FLOOR PLAN, 3/8"=1'-0" FOR MECHANICAL ROOMS.

- CONTRACT DOCUMENTS PRIOR TO BIDDING PROJECT.
- SHOWN ON THESE DRAWINGS OR SPECIFIED BY THE BASE BUILDING DRAWING AND SPECIFICATIONS.
- DUE TO SCALE OF DRAWINGS, ALL REQUIRED OFFSETS, DAMPERS, ETC., MAY NOT BE INDICATED.


- TURN OVER TO THE OWNER ALL MANUFACTURER'S WARRANTIES FOR EQUIPMENT AND MATERIALS PROVIDED.
- WHERE THE CONTRACTOR PROPOSES TO USE AN ITEM OF EQUIPMENT OTHER THAN THAT SPECIFIED OR DETAILED ON THE
- 10. CONTRACTOR SHALL COORDINATE ELECTRICAL REQUIREMENTS OF MECHANICAL EQUIPMENT WITH DIVISION 26.
- 11. ALL WORK SHALL BE DONE WITH LICENSED WORKMEN IN ACCORDANCE WITH STATE AND LOCAL GOVERNING AUTHORITIES. 12. BEFORE SELECTING MATERIAL AND EQUIPMENT, AND PROCESSING THE WORK, INSPECT AREAS WHERE MATERIAL AND
- 13. BEFORE CUTTING AND DRILLING INTO BUILDING ELEMENTS, INSPECT AND LAYOUT WORK TO AVOID DAMAGING STRUCTURAL
- 14. CONTRACTOR RESPONSIBLE FOR REPAIR AND PAYMENT FOR ALL UTILITIES DAMAGED DURING CONSTRUCTION. 15. CONTRACTOR TO CONFIRM DUCTWORK LOCATIONS. ELEVATIONS AND SIZES BEFORE ANY WORK IS STARTED. IF ANY
- 17. ALL SHOP DRAWINGS OF INDIVIDUAL COMPONENTS ARE TO BE SUBMITTED AS A COMPLETE PACKAGE.
- PROVIDE TO COMPLETE THE SYSTEM.

- 23. CONTRACTOR TO PROVIDE ALL CONTROL DEVICES, EQUIPMENT, ACCESSORIES, VFD DRIVES, OTHER APPARATUS, CONTROL VALVES AND DAMPERS, ACTUATORS, SENSORS, ETC. AND ALL CONTROL WIRING.
- STRUCTURAL ENGINEERS.
- ARCHITECTURAL PLANS.
- PREVENT TEMPERATURE EXPANSION STRESSES OF HYDRONIC PIPES BASED ON ACTUAL INSTALLATION/CONDITIONS.
- CIRCUIT BREAKERS, AND CONDUIT SIZES ARE APPROPRIATELY MODIFIED. IF MINIMUM ENERGY RATINGS OR EFFICIENCIES ARE
- ACCESS. INDICATE IF SEQUENCE AND COORDINATION ARE IMPORTANT TO EFFICIENT FLOW OF THE WORK. INCLUDE THE FOLLOWING.
- B. CLEARANCES FOR INSTALLING AND MAINTAINING INSULATION.
- SIZES AND LOCATION OF REQUIRED CONCRETE PADS AND BASES.

NOTES:

ISSUED FOR

REVISIONS

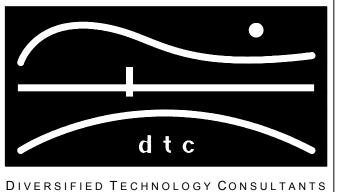

2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX

OORR **APPLICATION NO. 1846 BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT

MECHANICAL & PLUMBING GENERAL NOTES

DTC PROJECT NUMBER: 13-449-026 DTC DRAWING FILE:

DRAWN BY: RWF SCALE: 1/4=1.0 DATE: 12/9/2015 CHECKED BY: RCN


MP-001

NOTE: SOME SYMBOLS AND ABBREVIATIONS MAY OR

MAY NOT APPEAR ON THE DRAWINGS

GENERAL NOTES:

① NOT USED THIS SHEET
② NOT USED THIS SHEET
③ NOT USED THIS SHEET
④ NOT USED THIS SHEET
⑤ NOT USED THIS SHEET
⑦ NOT USED THIS SHEET
⑦ NOT USED THIS SHEET
③ HB: 3/4" CW
⑨ SH: 3/4" H&CW

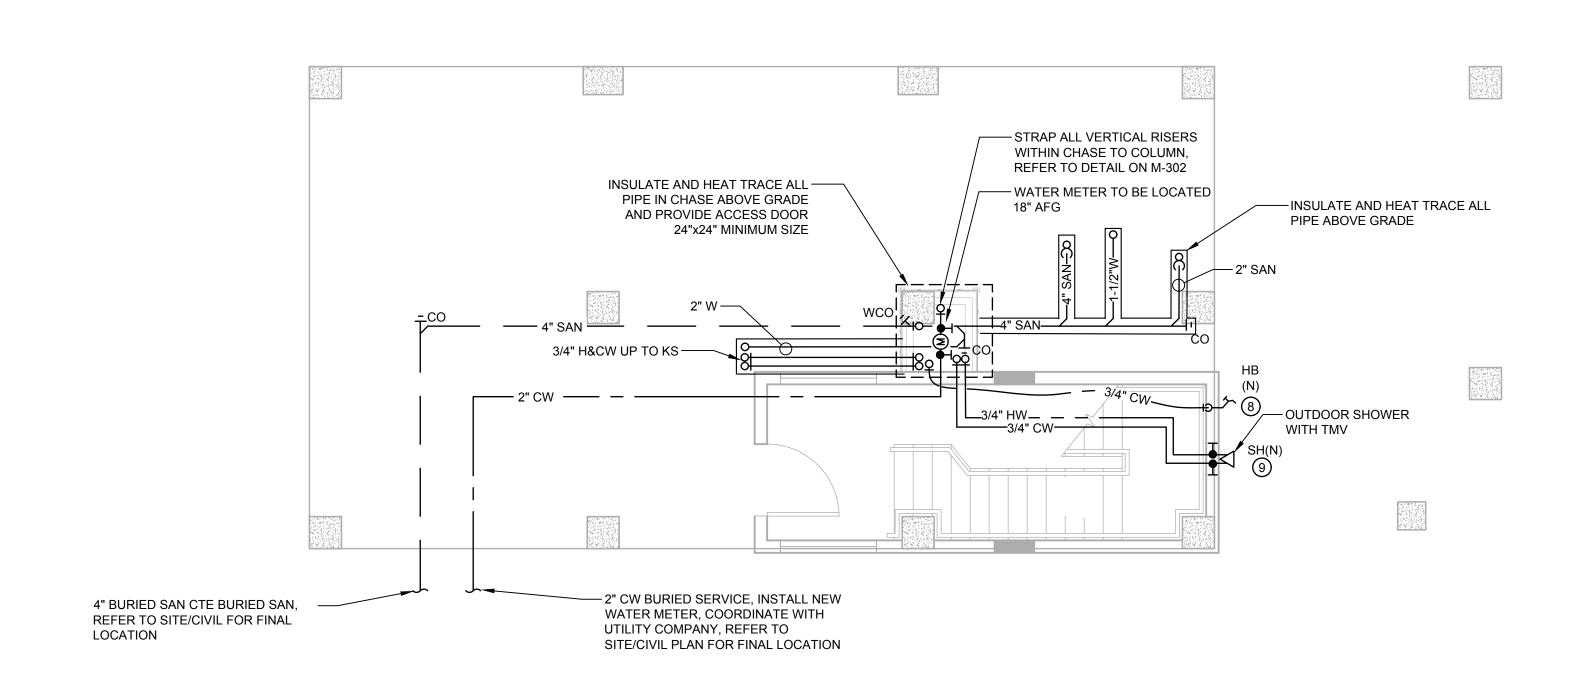

GROUND FLOOR PLAN

SCALE: 1/4" = 1'-0"

0 4' 8' 16'

NOTES:

ISSUED FOR BIDDING

REVISIONS



OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

PLUMBING GROUND FLOOR PLAN


DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:


 SCALE:
 1/4=1.0
 DRAWN BY:
 RWF

 DATE:
 12/9/2015
 CHECKED BY:
 RCN

SHEET

P-100

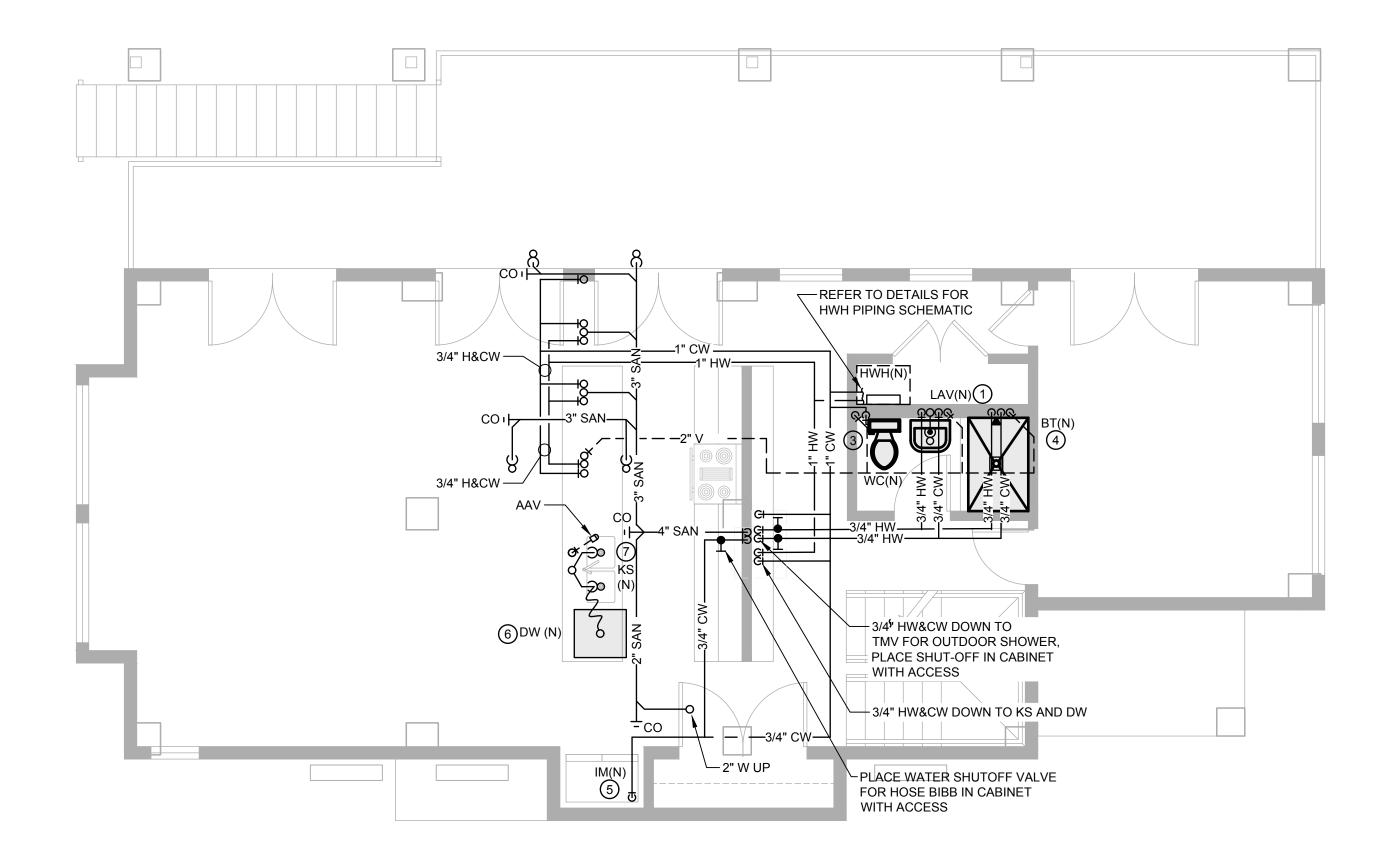

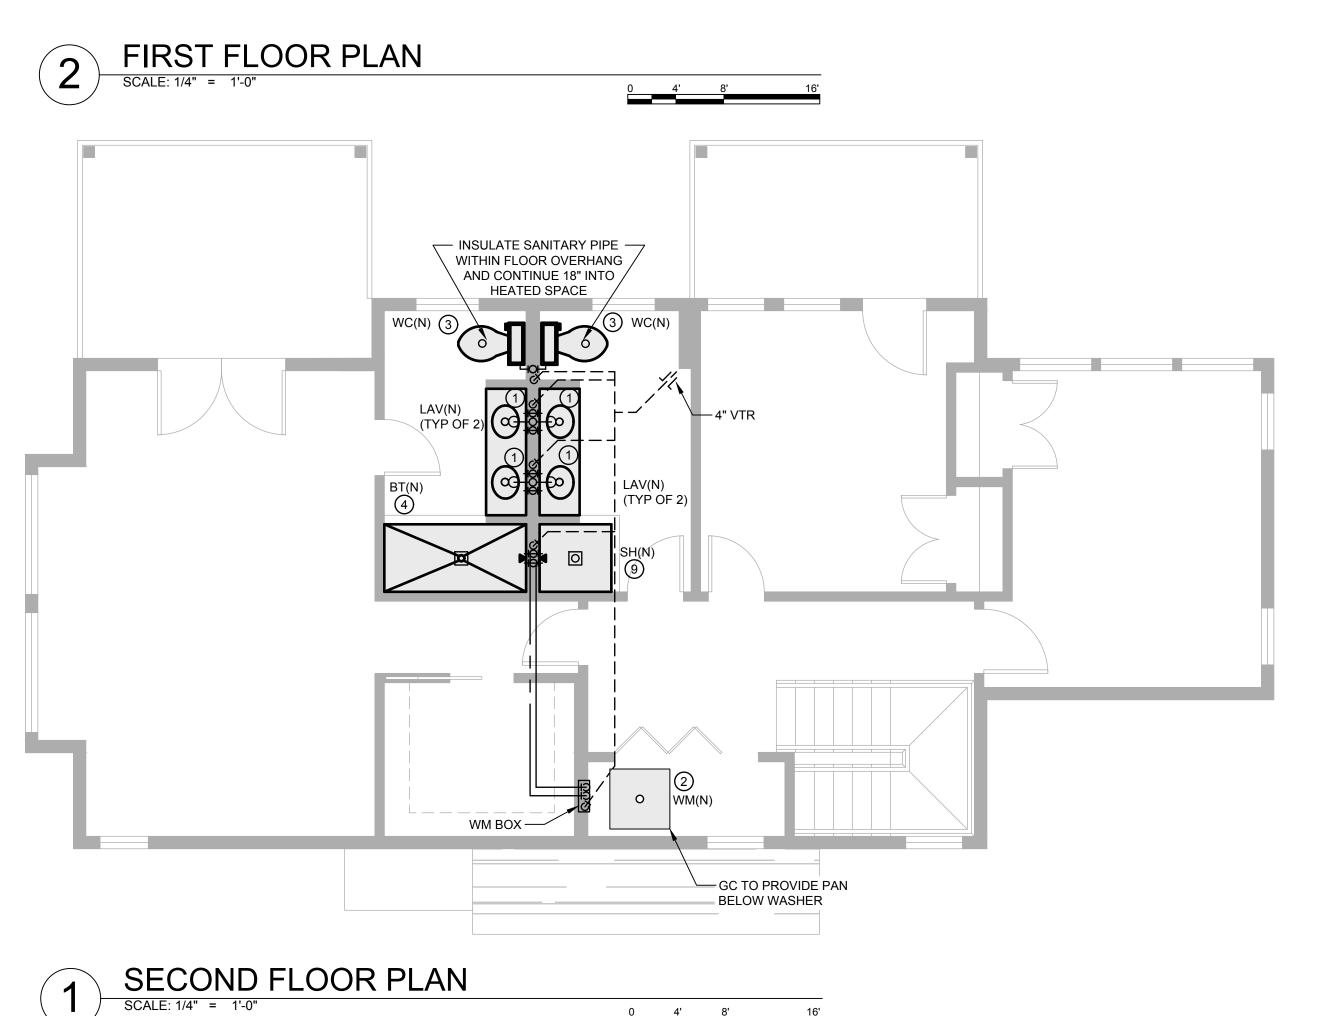

GENERAL NOTES:

6 DW: 1/2" CW, 3" W

8 NOT USED THIS SHEET

9 NOT USED THIS SHEET

(1) LAV: 3/4" H&CW, 1-1/2" W DN, 1-1/2" V RISE

② WM: 3/4" H&CW, 2" W DN, 1-1/2" V RISE

(4) BT: 3/4" H&CW, 2" SAN DN, 1-1/2" V RISE

(7) KS: 3/4" H&CW DN, 2" W DN, 1-1/2" V RISE

(5) IM: 3/4" CW W/ INLINE FILTER & VACUUM BREAKER

(3) WC: 3/4" CW, 4" SAN DN, 2" V RISE

ISSUED FOR BIDDING

REVISIONS



OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT


PLUMBING FIRST & SECOND FLOOR PLANS

DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:

 SCALE:
 1/4=1.0
 DRAWN BY:
 RWF

 DATE:
 12/9/2015
 CHECKED BY:
 RCN

P-101

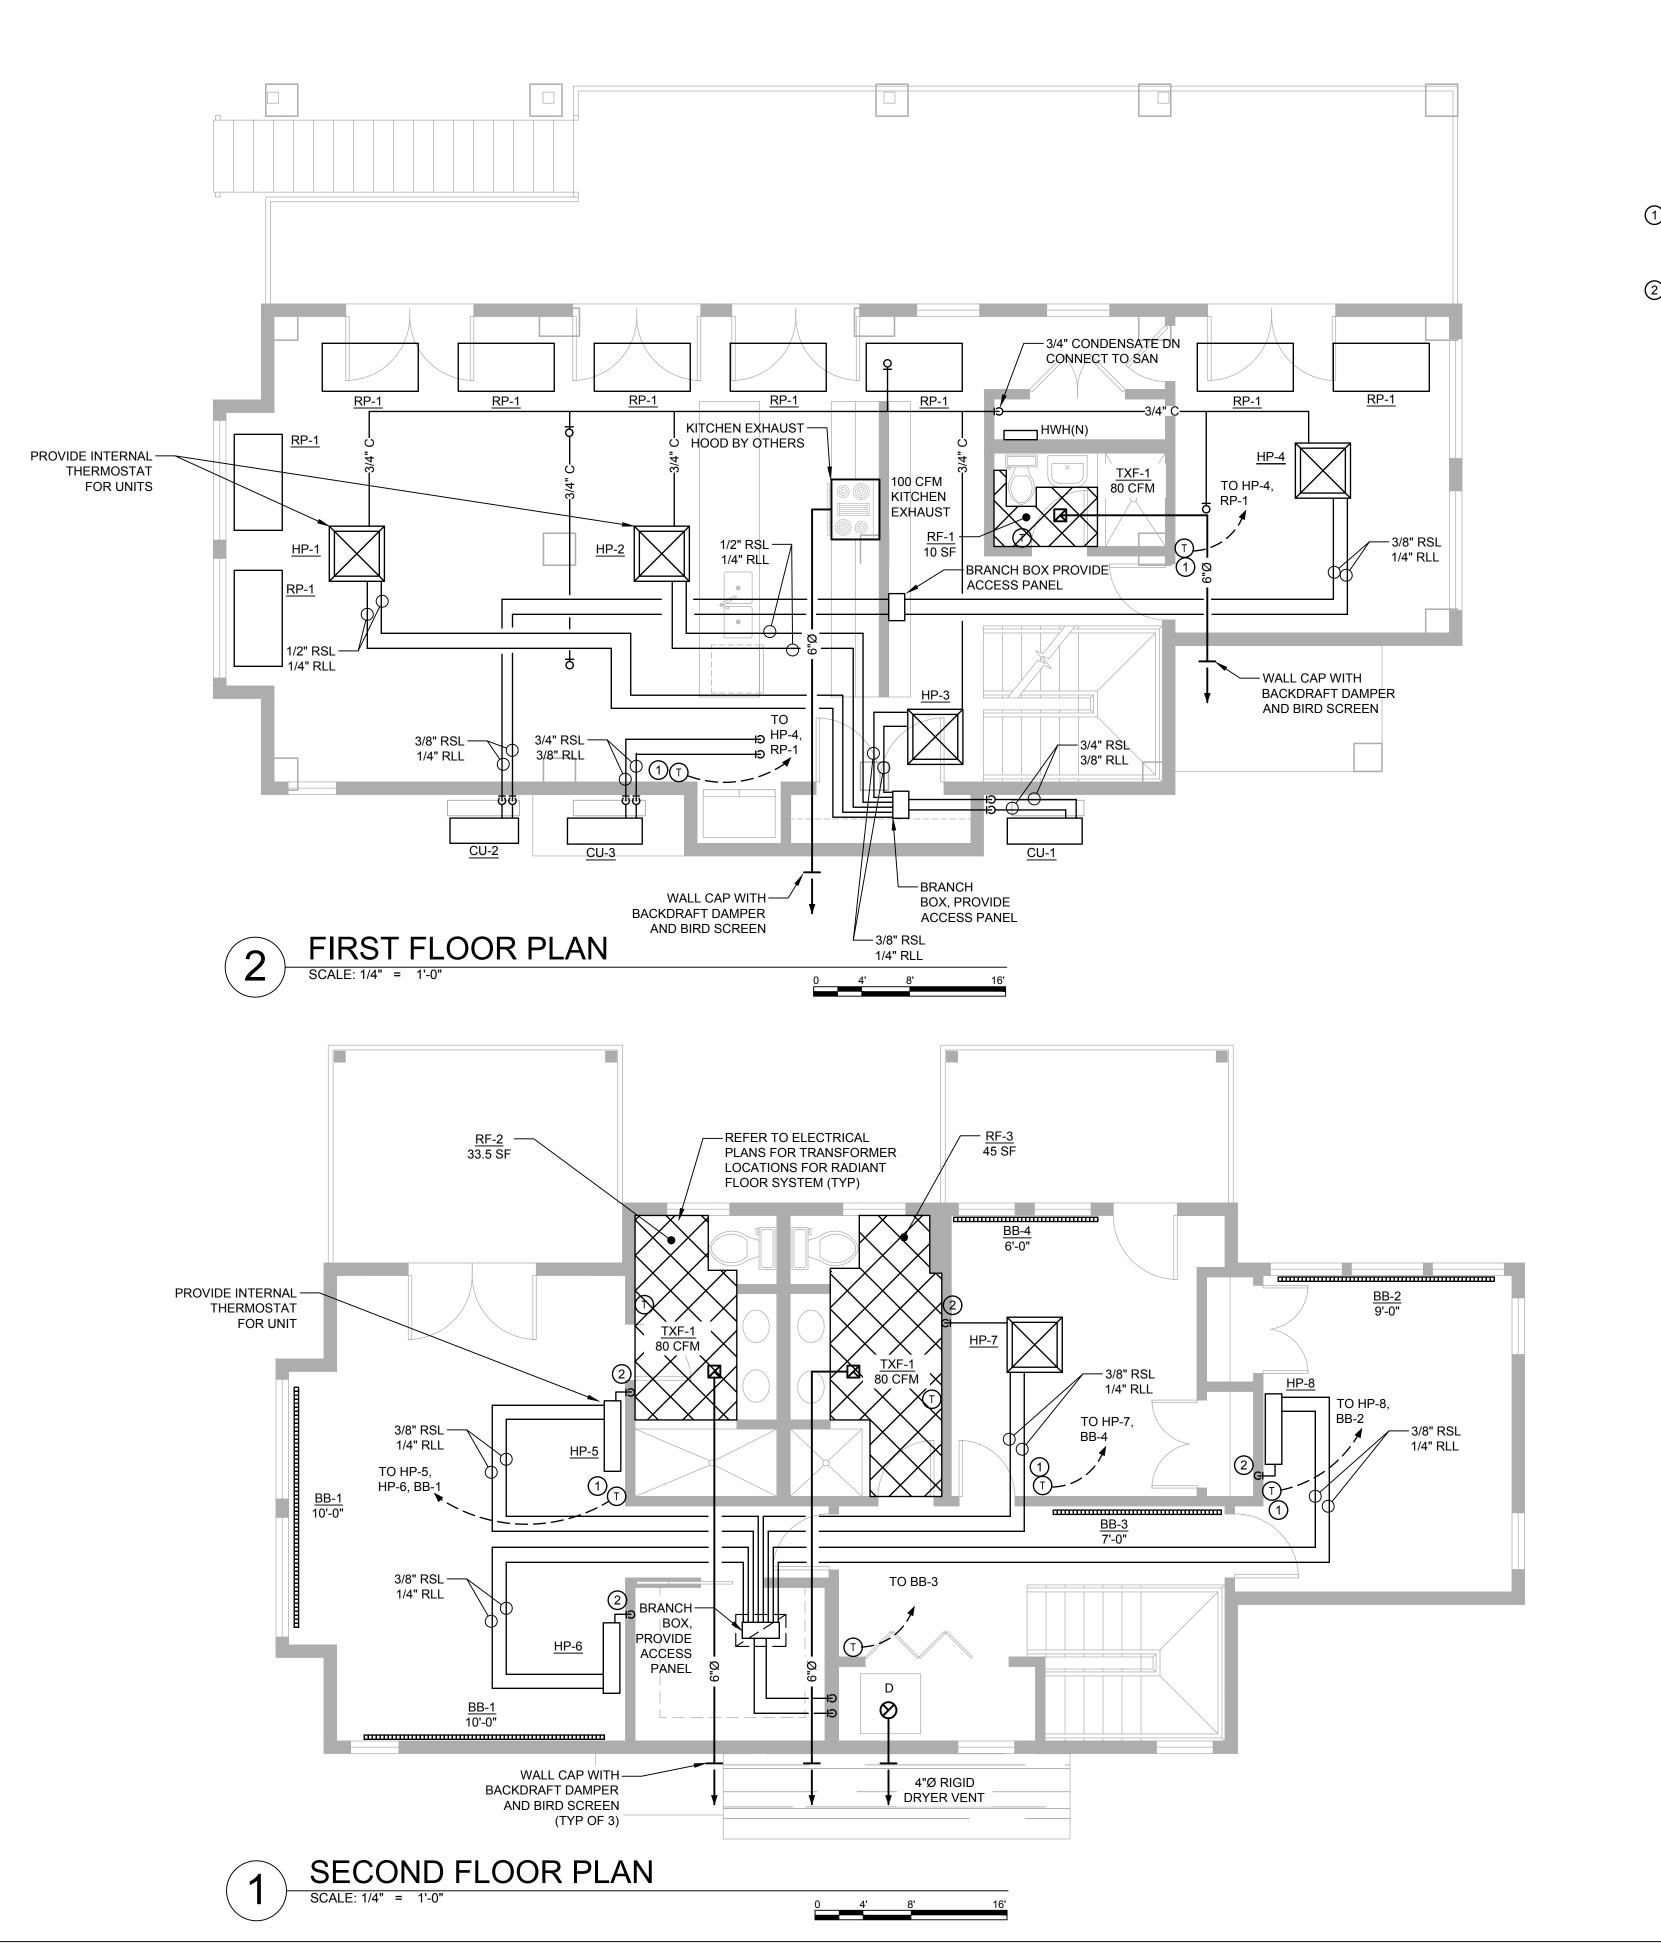

## ISSUED FOR BIDDING


MECHANICAL GENERAL NOTES:

(1) BASEBOARD HEATING AND RADIANT PANELS TO BE

CONTROLLED BY ZONE THERMOSTAT AS
AUXILIARY SECOND STAGE HEAT TO THE HEAT
PUMPS PRIMARY.

2) 3/4" CONDENSATE DN

REVISIONS

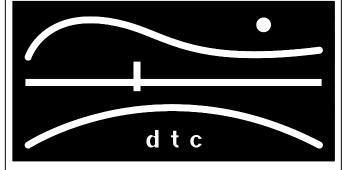

DIVERSIFIED TECHNOLOGY CONSULTANTS

2321 WHITNEY AVE HAMDEN CT 06518

203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

## MECHANICAL FLOOR PLANS

DTC PROJECT NUMBER: 13-449-026
DTC DRAWING FILE:

 SCALE:
 1/4=1.0
 DRAWN BY:
 RWF

 DATE:
 12/9/2015
 CHECKED BY:
 RCN

SHEET:

M-100

			D	OMESTIC	HOT WATER HE	CATER	SCHI	EDULE		
MARK	MANUFACTURER	MODEL	FLOW RATE (GPM)	WATER TEMP. RISE (°F)	OPERATING PRESSURE MIN/MAX (PSI)	WEIGHT	KW	ELECTRIC VOLTAGE/PH/HZ		REMARKS
HWH	STIEBEL ELTRON	TEMPRA 36 PLUS	4.5	55	30/50	19 LBS	36	240/1/60	3x50	
NOTES: 1.	DISCONNECTS AND STAF	RTERS BY DIVISION 26.	•				•			

			F	AN	SCHE	DULE	ר ע			
MARK	QTY	MANUFACTURER	ANUFACTURER MODEL CFM SP WATTS REMARKS							
TXF-1	TXF-1 3 BROAN XB-80L 80 0.1" w.c. 6.0 INTERLOCK WITH BATHROOM LIGHT SWITCH									
NOTES: CO	ONSTANT 20	CFM SWITCH TO 100 CFM	Л MAX.							

					HEA	AT PUMI	P UNIT SO	CHEDULE				
UNIT	JNIT MANUFACTURER MODEL		ASSOCIATED	NOMINAL COOLING	NOMINAL HEATING CAP.	AIR FLOW H/M/L	REFRIGERANT PIPING SIZE	ELECTRICAL		AREA BEING SERVED	DIMENSIONS (IN)	REMARKS
			UNIT	CAP. BTU/H	BTU/H	(CFM)	RSL,RLL (IN)	VOLT/PH/HZ	AMPS		HXWXD	
HP-1	LG	LMCN185HV	CU-1	18000	20800	459/424/388	1/2, 1/4	208/60/1	0.25	LIVING ROOM/KITCHEN	10-3/32x22-7/16x22-7/16	
HP-2	LG	LMCN185HV	CU-1	18000	20800	459/424/388	1/2, 1/4	208/60/1	0.25	LIVING ROOM/KITCHEN	10-3/32x22-7/16x22-7/16	
HP-3	LG	LMCN097HV	CU-1	9000	10400	300/265/230	3/8, 1/4	208/60/1	0.25	LIVING ROOM/KITCHEN	8-7/16x22-7/16x22-7/16	
HP-4	LG	LMCN125HV	CU-2	12000	13800	335/283/247	3/8, 1/4	208/60/1	0.25	SUNROOM	8-7/16x22-7/16x22-7/16	
HP-5	LG	LSN120HSV4	CU-3	12000	13800	335/318/300	3/8, 1/4	208/60/1	0.20	MASTER BEDROOM	11-1/4x8-1/4x34-7/8	
HP-6	LG	LSN120HSV4	CU-3	12000	13800	335/318/300	3/8, 1/4	208/60/1	0.20	MASTER BEDROOM	11-1/4x8-1/4x34-7/8	
HP-7	LG	LMCN125HV	CU-3	12000	13800	335/283/247	3/8, 1/4	208/60/1	0.25	SIDE BEDROOM	8-7/16x22-7/16x22-7/16	
HP-8	LG	LSN120HSV4	CU-3	12000	13800	335/318/300	3/8, 1/4	208/60/1	0.20	BACK BEDROOM	11-1/4x8-1/4x34-7/8	

1. DO NOT EXCEED REFRIGERANT PIPING LENGTH AS SPECIFIED BY THE MANUFACTURER.

2. PROVIDE INTEGRAL LIFT PUMP.


							CONDEN	ISING U	NIT SCHED	ULE					
UNIT	MANUFACTURER	MODEL	ASSOCIATED UNIT	COOLING CAPACITY (BTU/H)		TONS	REFRIG. TYPE	OUTDOOR	ELECTRICA	<b>AL</b>	MAX TOTAL LENGTH (FT)	WEIGHT (LBS)	DIMENSIONS HXWXD (IN)	LOCATION	REMARKS
		(BTU/H) (BTU/H) (BTU/H)	AMBIENT	VOLTAGE/PH/HZ	MIN CA	LENGTH (FT)	(LDS)								
CU-1	LG	LMU540HV	HP-1, HP-2, HP-3	52500	58000	4.5	R410A	95	208/60/1	29.4	475	214	24-3/32x15-3/4x54-11/32	DECK	INCLUDE MOUNTING BRACKETS & LOW AMBIENT KIT
CU-2	LG	LMU18CHV	HP-4	15600	17000	1.5	R410A	95	208/60/1	13.3	164	100	25-25/32x34-1/4x12-19/32	DECK	INCLUDE MOUNTING BRACKETS & LOW AMBIENT KIT
CU-3	LG	LMU540HV	HP-5, HP-6, HP-7, HP-8	52500	58000	4.5	R410A	95	208/60/1	29.4	475	214	24-3/32x15-3/4x54-11/32	DECK	INCLUDE MOUNTING BRACKETS & LOW AMBIENT KIT
NOTES: 1. II	NSTALL REFRIGERANT PIPIN	IG IN ACCORDAN	NCE WITH MANUFACTURER'S F	RECOMMENDATIONS.	•				•			•			•


		ELECT	RIC RA	ADIANT	FLOOR	SCHED	ULE
UNIT	MANUFACTURER	MODEL	WATTS	CABLE LENTH (FT)	VOLT/HZ/PH	AMPS	REMARKS
RF-1	HEATIZON	FLZ1520	228	50	120/60/1	15	INCLUDE 120V TRANSFORMER
RF-2	HEATIZON	FLZ3650	528	160	120/60/1	15	INCLUDE 120V TRANSFORMER
RF-3	HEATIZON	FLZ3650	528	160	120/60/1	15	INCLUDE 120V TRANSFORMER

				LENOTH	OUTDUT		WEIGHT	DIMENIOLONIO (INI)	
UNIT	QTY	MANUFACTURER	MODEL	LENGTH (FT)	OUTPUT (BTUH)	VOLTS	WEIGHT (LB/FT)	DIMENSIONS (IN) (HxD)	REMARKS
BB-1	2	RUNTAL	EB3-120D	10	5000	120	10	10-1/8x4-1/4	INCLUDE MOUNTING BRACKET & CLIPS
BB-2	1	RUNTAL	EB3-120D	9	4500	120	10	10-1/8x4-1/4	INCLUDE MOUNTING BRACKET & CLIPS
BB-3	1	RUNTAL	EB3-120D	7	3500	120	10	10-1/8x4-1/4	INCLUDE MOUNTING BRACKET & CLIPS
BB-4	1	RUNTAL	EB3-120D	6	3000	120	10	10-1/8x4-1/4	INCLUDE MOUNTING BRACKET & CLIPS

		EI	LECTRIC	C RAD	IANT C	EILING	PANE	L SCHEDU	LE
UNIT	QTY	MANUFACTURER	MODEL	VOLTS	WATTS	AMPS	WEIGHT (LBS)	DIMENSIONS (IN) (LxW)	REMARKS
RP-1	9	QMARK	CP751	120	750	6.3	28	24x48	INCLUDE MOUNTING BRACKET
NOTES: 1.	REFER TO	) MANUFACTURER'S DETAIL	FOR MOUNTING	FRAME TO CE	ILING.	•	•		

SYMBOL	MARK	MFR	MODEL	DESCRIPTION
	ВТ	KOHLER	STERLING ACCORD	ONE-PIECE RECESS BATH W/ INTEGRAL APRON, W/END DRAIN OUTLET. NOMINAL DIMENSIONS: 30" X 70" OR 30" X 46". 2" CAST BRASS DRAIN WITH CHROME PLATED STRAINER; 1.5 GPM TEMPTROL SHOWER WITH PRESSURE BALANCING VALVE, INTEGRAL CHECK STOPS, SHOWER HEAD ANCHOR PLATE AND LEVER HANDLE. SOLID SURFACE, 3 PIECE SHOWER WALL KIT & CURTAIN ROD. COLOR AND MODEL SPECIFIED BY OWNER.
	FIXTURE	SYMMONS	TEMPTROL	
7	НВ	WOODFORD	26 METAL HANDLE	CAST BRASS, CHROME FINISH, LOOSE KEY, ANTI-SIPHON ASSE RATED VACUUM BREAKER, TRIMLINE WALL HYDRANT w//2" INLET.
凶	TMV	LAWLER	SERIES 66	THERMOSTATIC MIXING VALVE- WATER HEATERS, 1" INLETS, 1-1/4" OUTLET.
	WC (2ND)	KOHLER	K3658-RA-0 HIGHLINE COMFORT HEIGHT	SECOND FLOOR WATER CLOSETS, VITREOUS CHINA, FLOOR SET, TANK TYPE WATER CLOSET. ELONGATED BOWL, 1.28 GPF.
	WC(1ST)	KOHLER	SAN SOUCI	FIRST FLOOR WATER CLOSETS, VITREOUS CHINA, FLOOR SET, INCLUDE TANK AND CARRIER. ELONGATED BOWL, 1.28 GPF.
	_	RAYCHEM	8XL1	120V, 1 Ø, 60 HZ, 8W/FT WITH A MAXIMUM LENGTH OF 115 FT, MAXIMUM OPERATING TEMP OF 150F.
0	LAV FAUCET	SWAN SYMMONS	CHESAPEAKE CH1B2237 S-20-2-FR LEVER HANDLE 1.5 GPM FLOW	SOLID SURFACE MOLDED VANITY TOP, w/OVERFLOW, INTEGRAL BOWL & BACKSPLASH; 4"CENTERS, 1-1/4" P-TRAP SET, SUPPLIES AND STOPS; SIZE INDICATED ON DRAWINGS, COLOR PER ARCHITECT. 4"CENTERSET CHROME FAUCET WITH STANDARD LEVER HANDLE, POP-UP DRAIN 1.5 GPM FLOW RESTRICTOR, VANDAL RESISTANT.
	KS FAUCET	ELKAY SYMMONS	KJW5023322 S-23-2-SM LEVER HANDLE 1.0 GPM FLOW	KITCHEN SINK; 18 GAUGE, TYPE 316 STAINLESS STEEL, 22"x33" LONG X 6" DEEP,TWO-HOLE FAUCET DRILLING, WITH LKAD-35 BASKET STRAINER, TAILPIECE ASSEMBLY; 8" SINGLE LEVER HANDLE, SINK MOUNTED FAUCET. GARBAGE DISPOSAL EVOLUTION BATCH FEED GARBAGE DISPOSAL, STAINLESS STEEL GRIND CHAMBER, INSINK AERATOR GD MAGNETIC COVER START, 2—STAGE MULTIGRIID, SOUND SEAL; 3/4HP, 120V/1PH, POWER COFW/3 PRONG PLUG.
_	WSH	SYMMONS	W-602-X	LAUDRY-MATE AUTOMATIC WASHING MACHINE VALVE WITH SUPPLY & DRAIN FIXTURE, 1/2" SWEAT UNION ELL CONNECTIONS & 2" DRAIN CONNECTIONS. FURNISH & INSTALL DRAIN PANS UNDER WASHER.
	WM	GE	GTWN4250DWS	3.9 CU. FT HIGH EFFICIENCY TOP LOAD WASHER, ENERGY STAR CERTIFIED, 27" WIDE, 42" HEIGHT, 120 V, 10 A, STAINLESS STEEL WASHER TUB, 150 LBS, WHITE.
	SH	KOHLER SYMMONS	X TEMPTROL	ONE-PIECE SHOWER BASE W/ DRAIN OUTLET. NOMINAL DIMENSIONS: 42"X42". 2" CAST BRASS DRAIN WITH CHROME PLATED STRAINER; 1.5 GPM TEMPTROL SHOWER WITH PRESSURE BALANCING MIXING VALVE, INTEGRAL CHECK STOPS, SHOWER HEAD ANCHOR PLATE AND LEVER HANDLE. SOLID SURFACE, 3 PIECE SHOWER WALL KIT & CURTAIN ROD. COLOR AND MODEL SPECIFIED BY OWNER.
	PRV	WATTS	LF25AUB-Z3	PRESSURE REDUCING VALVE WITH EPDM DIAPHRAGM, BRONZE BODY AND INTEGRAL STAINLESS STEEL STRAINER.

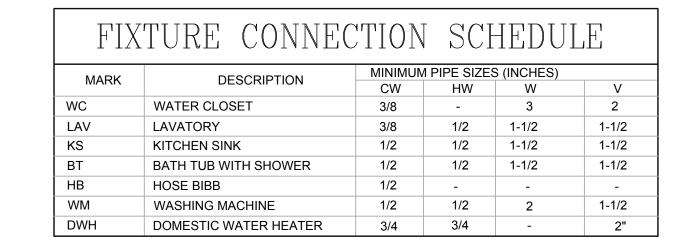


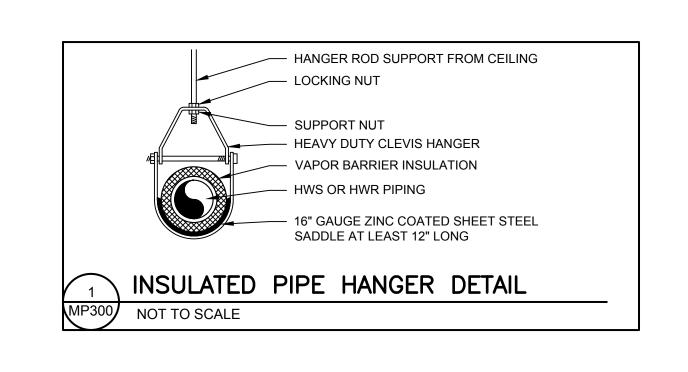

NOTES:

## ISSUED FOR BIDDING

REVISIONS

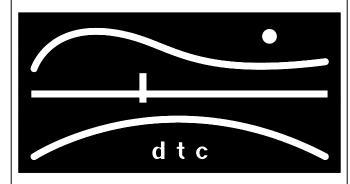

DIVERSIFIED TECHNOLOGY CONSULTANTS
2321 WHITNEY AVE HAMDEN CT 06518
203 239 4200 203 234 7376 FAX


OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

MECHANICAL SCHEDULES

	DTC PRC	JECT NUMBER:	13-449-026	
	DTC DRA	WING FILE:		
	SCALE:	1/4=1.0	DRAWN BY:	RWF
	DATE:	12/9/2015	CHECKED BY:	RCN


SHEET:

MP-300

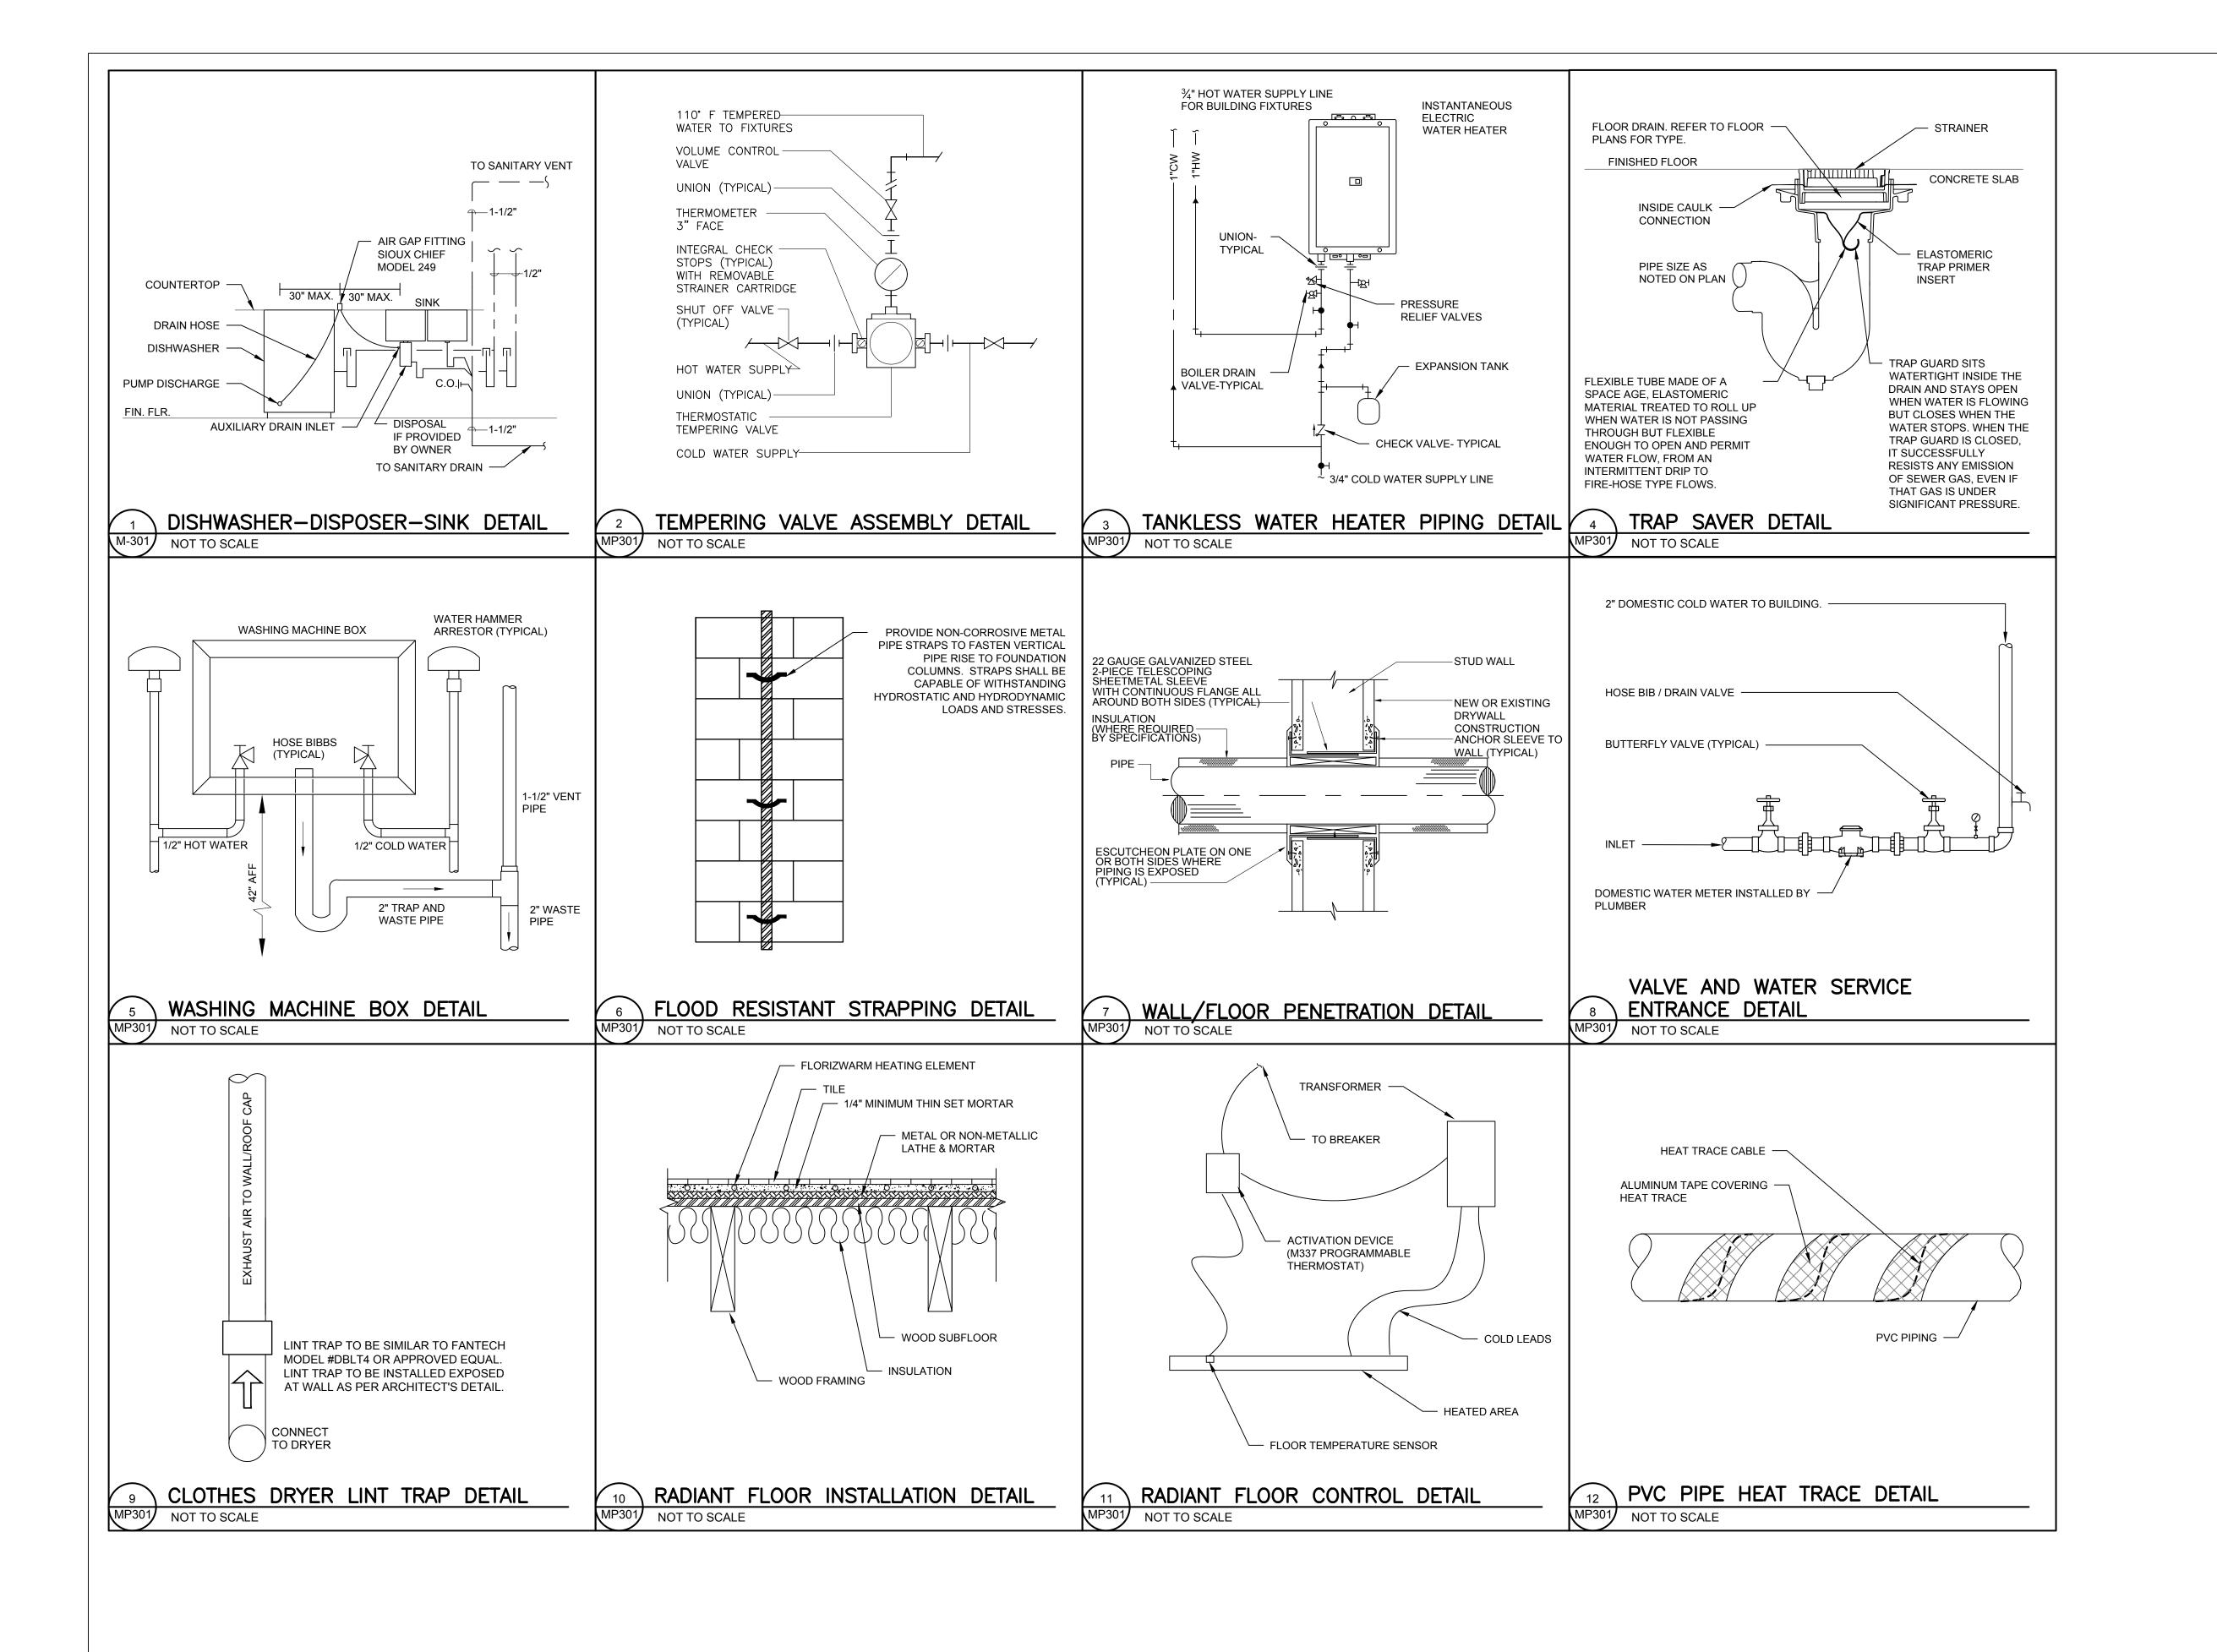

## ISSUED FOR BIDDING

REVISIONS

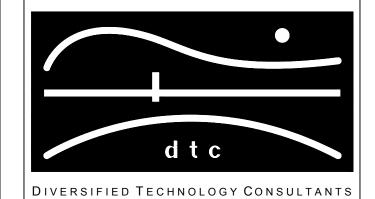

2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX

OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

## MECHANICAL & PLUMBING DETAILS

DTC PROJECT NUMBER: 13-449-026

DTC DRAWING FILE:


SCALE: 1/4=1.0
DATE: 12/9/2015

DRAWN BY: RWF
CHECKED BY: RCN

SHEET

<del>-</del>:

MP-301

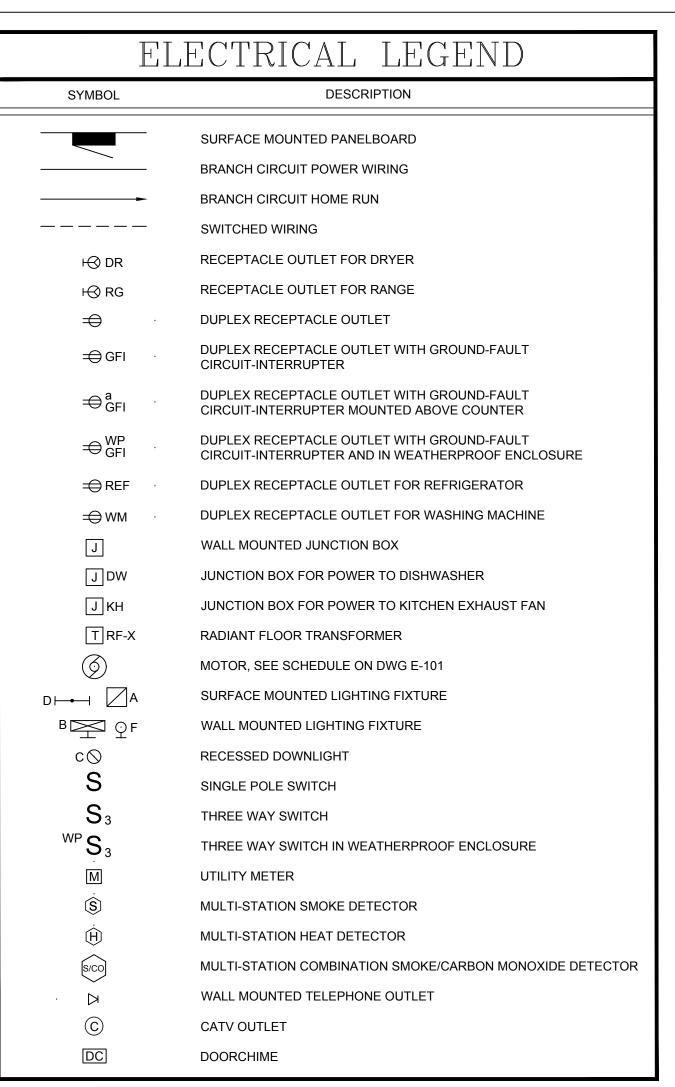

LIGHT FIXTURE SCHEDULE										
TYPE	BASE OF DESIGN	DESCRIPTION	VOLTAGE	LAMPS	REMARKS					
А	LITHONIA LIGHTING 2ACLX2-20L-EZB-LP830	2X2 SURFACE MOUNTED, OUTDOOR, DAMP LOCATION LISTED FIXTURE WITH 2000 LUMENS OUTPUT, 0-10V DIMMING AND 3000K COLOR TEMPERATURE.	120V	18W LED	1,2,3,4					
В	SEA GULL LIGHTING 83055-12	DECORATIVE, WALL MOUNTED, OUTDOOR, WEATHER RESISTANT FIXTURE WITH FROSTED LENS.	120V	60W A-19	1,2,3,4					
С	LITHONIA LIGHTING 6BPMW LED	6" RECESSED DOWNLIGHT WITH MATTE WHITE FINISH, ALUMINUM DIE CAST REFLECTOR, DIFFUSED LENS, AND 3000K COLOR TEMPERATURE, IC RATED AND ENERGY STAR RATED.	120V	8.9W LED	1,2,3,4					
D	LITHONIA LIGHTING 3260RE	ENERGY STAR RATED 2' LINEAR FLUORESCENT FIXTURE WITH DURABLE, WHITE ACRYLIC DIFFUSER AND RESIDENTIAL GRADE ELECTRONIC BALLAST	120V	(2) 32W T8	1,2,3,4					
F	SEA GULL LIGHTING 49065BLE-962	ENERGY STAR RATED 2 LIGHT VANITY FIXTURE WITH WHITE GLASS SHADES AND BRUSHED NICKEL FINISH.	120V	(2) 13W CFL	1,2,3,4					


- 1. ALL NECESSARY MOUNTING HARDWARE, HANGERS, BRACKETS, STEMS, CHAINS, ETC. SHALL BE PROVIDED.
- 2. REFER TO ARCHITECTURAL DRAWINGS FOR MOUNTING HEIGHTS, ARRANGEMENTS, EXACT LOCATIONS, CEILING HEIGHTS, ETC. ALL COLORS AND FINISHES SHALL BE VERIFIED
- BY THE OWNER. 3. FIXTURES SHALL BE SEISMICALLY SUPPORTED AS REQUIRED BY THE CONNECTICUT STATE BUILDING CODE.
- 4. FIXTURES SHOWN ARE FOR BASIS OF DESIGN ONLY. CONTRACTOR SHALL MEET THE CRITERIA OF THE FIXTURES SHOWN IN THE DESCRIPTIONS ABOVE.

#### ELECTRICAL ABBREVIATIONS ABBREVIATIONS DESCRIPTION AMPERES ALTERNATING CURRENT (60 HZ) A/C AIR CONDITIONING AHJ AUTHORITY HAVING JURISDICTION AFF ABOVE FINISHED FLOOR AMERICAN WIRE GAUGE AWG CONDUIT CATV CABLE TV COMPACT FLUORESCENT CFL CU COPPER DR DRYER DW DISHWASHER DWG DRAWING FLA FULL LOAD AMPS GROUND-FAULT CIRCUIT-INTERRUPTER GFI HP HORSEPOWER JUNCTION KILOVOLT AMPERE ΚV KVA KILOVOLT AMPERE METER METAL CLAD MCA MINIMUM CIRCUIT AMPACITY NEC NATIONAL ELECTRIC CODE NECA NATIONAL ELECTRICAL CONTRACTORS ASSOC. NATIONAL ELECTRICAL MANUFACTURERS ASSOC. NEMA NM/NM-B NONMETALLIC SHEATHED N.T.S. NOT TO SCALE OCP OVERCURRENT PROTECTION PVC POLYVINYL CHLORIDE REF REFRIGERATOR RG RANGE TYP TYPICAL UNDERWRITER'S LABORATORY UL U.O.N. UNLESS OTHERWISE NOTED VOLTS **VOLT-AMPERES** VA WATTS WM WASHING MACHINE WEATHERPROOF WP NUMBER

E-001 ELECTRICAL NOTES, LEGENDS, ABBREVIATIONS, DETAILS & SCHEDULES  E-100 ELECTRICAL GROUND LEVEL & FIRST FLOOR PLANS  E-101 ELECTRICAL SECOND FLOOR PLAN  G-5U COAX (PECKETED) (TYP.)  TV BEDROOM  TV TYPICAL CABLE TELEVISION JACK LOCATION, 2"X4" DEEP BOX WITH COVER. CONTRACTOR TO INSTALL IN ACCORDANCE WITH LOCAL CABLE COMPANY REQUIREMENTS. COORDINATE QUANTITY AND LOCATIONS ON	DRAWING LIST								
E-100 ELECTRICAL GROUND LEVEL & FIRST FLOOR PLANS  E-101 ELECTRICAL SECOND FLOOR PLAN  G-5U COAX (PECKETED) (TYP.)  TV BEDROOM  TYPICAL CABLE TELEVISION JACK LOCATION, 2"X4" DEEP BOX WITH COVER. CONTRACTOR TO INSTALL IN ACCORDANCE WITH LOCAL CABLE COMPANY REQUIREMENTS. COORDINATE QUANTITY AND LOCATIONS ON	SHEET	NAME							
E-101  ELECTRICAL SECOND FLOOR PLAN  TV BEDROOM  TYPICAL CABLE TELEVISION JACK LOCATION, 2"X4" DEEP BOX WITH COVER. CONTRACTOR TO INSTALL IN ACCORDANCE WITH LOCAL CABLE COMPANY REQUIREMENTS. COORDINATE QUANTITY AND LOCATIONS ON	E-001	ELECTRICAL NOTES, LEGENDS, ABBREVIATIONS, DETAILS & SCHEDULES							
TV BEDROOM  TYPICAL CABLE TELEVISION JACK LOCATION, 2"X4" DEEP BOX WITH COVER. CONTRACTOR TO INSTALL IN ACCORDANCE WITH LOCAL CABLE COMPANY REQUIREMENTS. COORDINATE QUANTITY AND LOCATIONS ON	E-100	E-100 ELECTRICAL GROUND LEVEL & FIRST FLOOR PLANS							
TV BEDROOM  TYPICAL CABLE TELEVISION JACK LOCATION, 2"X4" DEEP BOX WITH COVER. CONTRACTOR TO INSTALL IN ACCORDANCE WITH LOCAL CABLE COMPANY REQUIREMENTS. COORDINATE QUANTITY AND LOCATIONS ON	E-101	ELECTRICAL SECOND FLOOR PLAN							
FLOOR PLANS AND OWNER.									

—(TV) MASTER BEDROOM

—⊢ BEDROOM

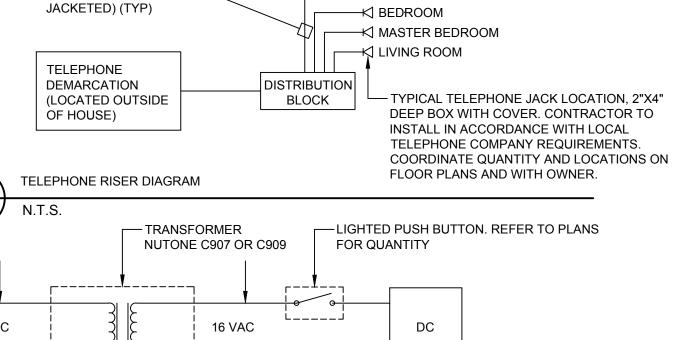

4,LC L\_\_\_\_\_\_ DOOR CHIME -

PROVIDE NUTONE MODEL #LA317WH

CABLE TV RISER DIAGRAM


5 CABLE (PE

24/8" TWISTED CAT. -

DOOR CHIME SCHEMATIC

### ELECTRICAL GENERAL NOTES

- UNLESS OTHERWISE INDICATED, FURNISH AND INSTALL A COMPLETE AND OPERATIONAL ELECTRICAL SYSTEM INCLUDING ALL NECESSARY MATERIAL, LABOR, AND EQUIPMENT.
- ELECTRICAL PLANS AND DETAILS, AND ONE LINE DIAGRAMS SHOW THE GENERAL LOCATION AND ARRANGEMENT OF THE ELECTRICAL SYSTEM. THEY ARE DIAGRAMMATIC AND DO NOT SHOW ALL CONDUIT BODIES, CONNECTORS, BENDS, FITTINGS, HANGERS, AND ADDITIONAL PULL AND JUNCTION BOXES WHICH THE CONTRACTOR MUST PROVIDE TO COMPLETE THE ELECTRICAL
- FURNISH AND INSTALL A TEMPORARY ELECTRICAL SERVICE FOR ELECTRICAL POWER DURING CONSTRUCTION.
- ALL EQUIPMENT AND MATERIAL SHALL BE LABELED AND LISTED, AND INSTALLED IN ACCORDANCE WITH THEIR LISTING.
- THE CONTRACTOR SHALL OBTAIN ALL REQUIRED PERMITS AND ARRANGE FOR ALL REQUIRED INSPECTIONS IN ACCORDANCE WITH STATE GOVERNING AUTHORITIES.
- ALL WORK SHALL BE DONE WITH LICENSED WORKMEN IN ACCORDANCE WITH STATE GOVERNING
- THE DEFINITION OF ELECTRICAL TERMS USED SHALL BE AS DEFINED IN THE 2011 EDITION OF THE NATIONAL ELECTRIC CODE (NEC).
- THE TERM "INDICATED" SHALL MEAN "AS SHOWN ON CONTRACT DOCUMENTS (SPECIFICATIONS, DRAWINGS, AND RELATED ATTACHMENTS)".
- THE TERM "SIZE" SHALL MEAN ONE OR MORE OF THE FOLLOWING: "LENGTH, CURRENT AND VOLTAGE RATING, NUMBER OF POLES, NEMA SIZE, AND OTHER SIMILAR ELECTRICAL
- 10. ELECTRICAL PLANS AND DETAILS DO NOT SHOW ALL INTERFERENCE'S AND CONDITIONS, VISIBLE AND/OR HIDDEN, THAT MAY EXIST; THUS REQUIRING THE CONTRACTOR TO INSPECT AND SURVEY THE SPACE BEFORE PERFORMING THE WORK.
- 11. COORDINATE ELECTRICAL WORK WITH OWNER.
- 12. COORDINATE ELECTRICAL WORK WITH OTHER DIVISIONS OF THIS PROJECT.
- 13. BEFORE SELECTING MATERIAL AND EQUIPMENT, AND PROCEEDING WITH WORK, INSPECT AREAS WHERE MATERIAL AND EQUIPMENT ARE TO BE INSTALLED TO INSURE SUITABILITY, AND CHECK NEEDED SPACE FOR PLACEMENT, CLEARANCES AND INTERCONNECTIONS.
- 14. BEFORE CUTTING OR DRILLING INTO BUILDING ELEMENTS INSPECT AND LAYOUT WORK TO AVOID DAMAGING STRUCTURAL ELEMENTS AND BUILDING UTILITIES.
- 15. ALL WORK SHALL BE DONE IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE (NEC) ANSI/NFPA 70 2011 EDITION.
- 16. TYPICAL MOUNTING HEIGHTS OF DEVICES SHALL COMPLY NECA 1-2010.
- 17. PENETRATIONS THROUGH GROUND SLAB SHALL BE SEALED WITH POLYURETHANE SEALANT TYPICAL FOR ALL PENETRATIONS.
- 18. FURNISH AND INSTALL MEANS OF DISCONNECTION FOR ALL MOTORIZED EQUIPMENT AND APPLIANCES IN ACCORDANCE WITH NEC.

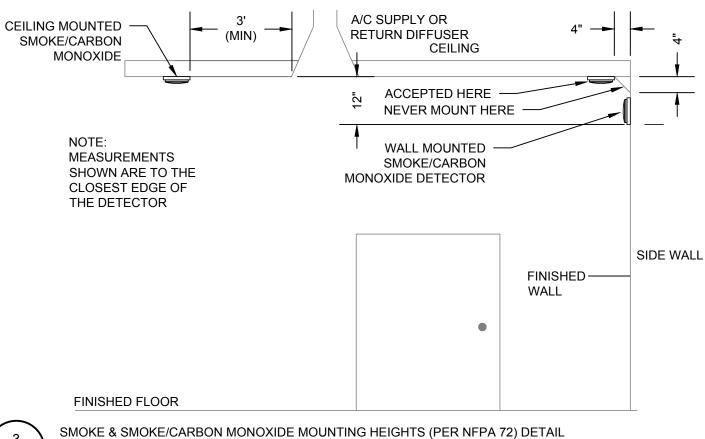

E-001

	FEEDE	R SCHE	DULE	CUIT OR SIZE				
INDOOR BRANCH CIRCUITS	CIRCUIT OR OVERCURRENT RATING 2 POLE	OUTDOOR BRANCH CIRCUITS	CIRCUIT OR OVERCURRENT RATING 2 POLE					
2#14&1#14G.	15A	2#12&1#12G.	15A	3/4"				
2#12&1#12G.	20A	2#12&1#12G.	20A	3/4"				
2#10&1#10G.	30A	2#10&1#10G.	30A	3/4"				
2#8&1#10G.	40A	2#8&1#10G.	40A	3/4"				
2#6&1#10G.	50A	2#6&1#10G.	50A	1"				
2#4&1#10G.	60A	2#4&1#10G.	60A	1-1/4"				
SUBPANEL FEED		3#1&1#8G.	100A	1-1/2"				
SERVICE		3#350KCMIL&1#4G.	300A	3"				


- 1. ALL BRANCH CIRCUIT USED INDOORS SHALL BE WIRED WITH NONMETALLIC SHEATHED CABLE
- 2. ALL EQUIPMENT AND DEVICES LOCATED OUTDOORS SHALL BE CIRCUITED WITH CONDUIT AND

NOTES:

ISSUED FOR BIDDING



REVISIONS

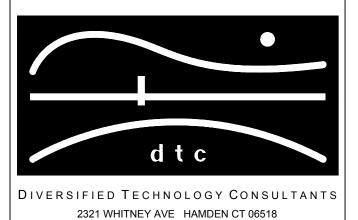

203 239 4200 203 234 7376 FAX


OORR **APPLICATION NO. 1846 BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT

ELECTRICAL NOTES, LEGENDS, ABBREVIATIONS, DETAILS & SCHEDULE


	DTC PROJECT NUMBER: 13-449-026									
DTC DRAWING FILE:										
	SCALE:	NONE		DRAWN BY:	WM					
	DATE:	12/9/2015		CHECKED BY:	JP					

E-001



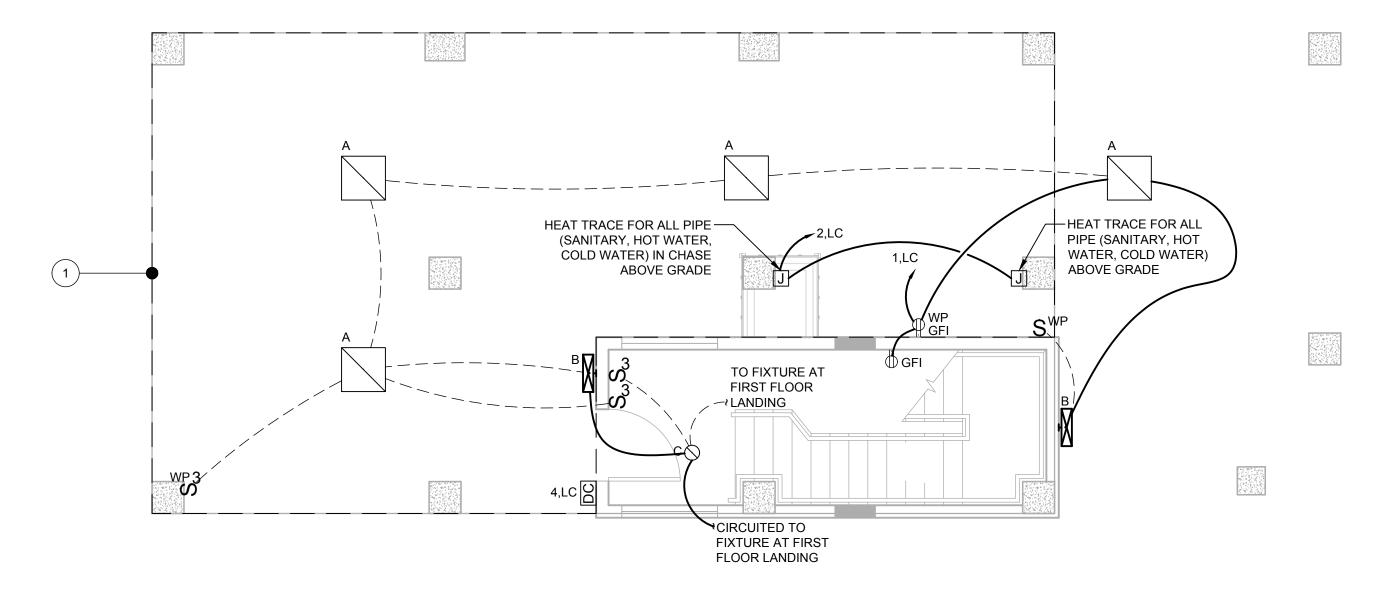

## GROUND LEVEL PLAN SCALE: 1/4" = 1'-0" 0 4' 8'

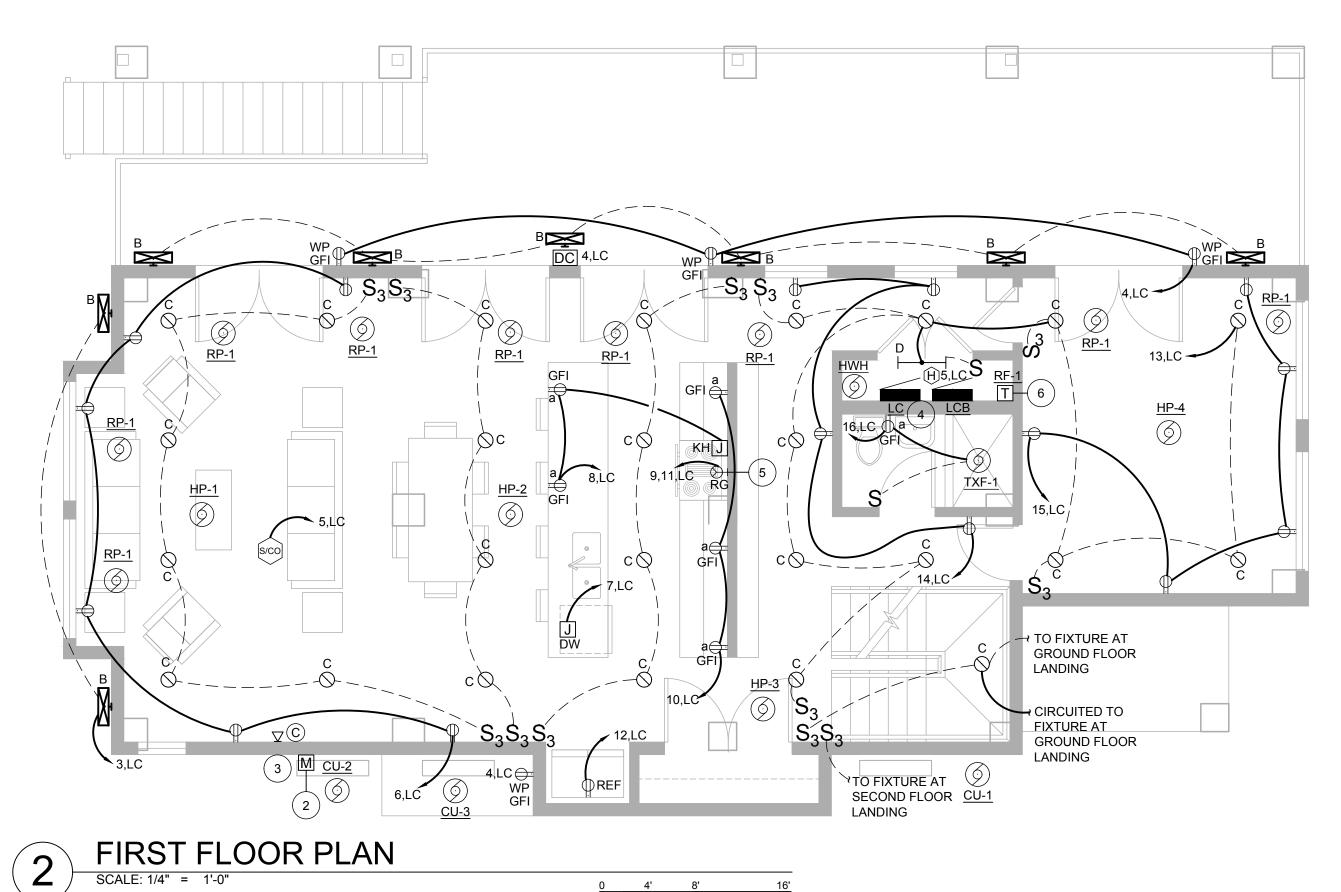

### GENERAL NOTES

- ALL CIRCUITS ON THIS DRAWING SHALL BE SIZED 2#12 , #12G AND SHALL BE CONNECTED TO NEW 20A-1P CIRCUIT BREAKER IN SOURCE PANEL, U.O.N.
- 2. ALL 120VAC BRANCH CIRCUITS EXCEEDING 100' IN LENGTH SHALL BE INCREASED TO 2#10, #10G UNLESS OTHERWISE NOTED.
- 3. REFER TO DWG E-001 FOR SYMBOL LEGEND, ABBREVIATIONS, AND LIGHTING FIXTURE SCHEDULE.
- . ALL BRANCH CIRCUIT USED INDOORS SHALL BE WIRED WITH NM CABLE U.O.N. REFER TO FEEDER SCHEDULE ON DRAWING E-001 FOR SIZING.
- 5. ALL EQUIPMENT AND DEVICES LOCATED OUTDOORS SHALL BE CIRCUITED WITH CONDUIT AND WIRING. REFER TO FEEDER SCHEDULE ON DWG E-001 FOR SIZING.
- . ALL 125 -VOLT 15 AND 20 AMP RECEPTACLES LOCATED AT 5 1/2 ' AFF OR BELOW SHALL BE TAMPER RESISTANT.

### **ELECTRICAL KEYNOTES**



- . PVC CONDUIT AND WIRING SHALL BE USED FOR ALL DEVICES LOCATED OUTDOORS.
- CONNECT SERVICE ENTRANCE THROUGH WEATHERHEAD TO METER TO ACCOMMODATE LIFTING OF HOUSE. EQUIPMENT SHALL BE ABOVE THE 500 YEAR FLOOD PLANE. COORDINATE ALL WORK, INCLUDING CONFIRMING PROPER MOUNTING HEIGHT OF METER, WITH THE LOCAL ELECTRICAL INSPECTOR AND UTILITY COMPANY. PROVIDE 300 AMP RATED SERVICE ENTRANCE WIRING FROM METER TO PANEL LOCATION.
- 3. LOCATION OF TELEPHONE AND CABLE TV SERVICE ENTRANCE WIRING. EQUIPMENT SHALL BE ABOVE THE 500 YEAR FLOOD PLANE. COORDINATE ALL WORK, INCLUDING SERVICE ENTRANCE EQUIPMENT MOUNTING HEIGHTS WITH ASSOCIATED UTILITY COMPANIES.
- 4. PROVIDE 300A, 240/120V ELECTRICAL PANEL. PROVIDE SERVICE GROUNDING ELECTRODE CONDUCTORS AND CONNECTIONS PER NEC ARTICLE 250.
- 5. PROVIDE NEMA 14-50R RECEPTACLE FOR ELECTRIC RANGE.
- 3. LOCATION OF TRANSFORMER FOR RADIANT FLOOR HEATING FOR 1ST FLOOR BATHROOM.

					<u>PANELBO</u>	DARD LC					
LASS	: ① Ligh	nting						S/E RA TING	NO		
	O Dist		l.					M OUNTING	SURFA	1CE	
US SIZ	ZE	300A						CB TYPE	300A		
	GECLA		240/120V, 1 Ø ,3W					FEEDER ENTRANCE			
	ULLY RA	(TED)	22 KAIC					LOCATION			
BREA	KER				SE LOAD -	KVA			В	BREAK	_
#	Α	Р	DESCRIPTION	LOAD	Α	В	LOAD	DESCRIPTION	Α	Р	1
1	20	1	GROUND LEVEL LTG & RECPTS	0.57	0.97		0.40	HEAT TRACE	20	1	
3	20	1	OUTDOOR LIGHTING	0.48		1.23	0.75	OUTDOOR RECPTS & DOORBELL	20	1	19
5	20	1	(1) DETECTORS	0.07	1.15		1.08	LIVING/DINNING RM RECPTS	20	1	
7	20	1	DISHWASHER	1.20		2.70	1.50	KITCHEN RECPTS & HOOD	20	1	
9	50	2	RANGE	4.00	5.50		1.50	KITCHEN RECPTS	20	1	
11	-	-	-	4.00		5.20	1.20	REFRIGERATOR	20	1	
13	20	1	1ST FLOOR LTG	0.28	1.00		0.72	CORRIDOR RECPTS	20	1	1
15	20	1	SUNROOM RECPTS	0.90		1.39	0.49	1ST FLOOR BATHROOM	20	1	
17	20	1	(1) MASTERBED RM	1.31	2.06		0.76	(1) BEDROOM	20	1	,
19	20	1	2ND FLOOR RCPTS & LTG	0.58		1.51	0.94	(1) BEDROOM	20	1	
21	20	1	WASHING MACHINE	1.20	3.70		2.50	DRYER	30	2	
23	20	1	2ND FLOOR BATHROOM	1.03		3.53	2.50	-	_	-	
25	20	1	2ND FLOOR BATHROOM	1.03	1.23		0.19	HP-1 - HP-8	15	2	
27	20	1	RP-1,RP-1	1.50		1.69	0.19	-	-	-	
29	20	1	RP-1,RP-1	1.50	3.00		1.50	RP-1,RP-1	20	1	,
31	20	1	RP-1	0.75		2.25	1.50	RP-1,RP-1	20	1	,
33	60	2	HWH	6.00	12.00		6.00	HWH	60	2	,
35	-	1		6.00		12.00	6.00	-	-	-	,
37	60	2	HWH	6.00	7.47		1.47	BB-1	20	1	,
39	-	-	-	6.00		6.00	-	PANEL 'LCB'	100	2	1
41	20	1	BB-1	1.47	1.47		-	-	-	=	2
OTA	L LOAL	PER	PHASE:		39.5	37.5					


NOTES:
1. PROVIDE AFCI CIRCUIT BREAKER

					<u>PANELBO</u>	ARD LCB					
CLASS	: 🌘 Ligi	hting		·				S/E RA TI	NG NO		
	O Dist	ribution						M OUNTI	NG SURF	ACE	
BUS SI	ZE	100A						CB TY	PE MLO		
VOLTA	GE CLA	SS:	240/120V, 1 Ø ,3W					FEEDER ENTRAN	CE TOP		
SCR (F	ULLY RA	TED)	22 KAIC					LOCATI	ON MECH	CLOS	ET
BREA	KER			PHA	SE LOAD -	KVA		BREAKER			
#	Α	Р	DESCRIPTION	LOAD	Α	В	LOAD	DESCRIPTION	Α	P	#
1	20	1	BB-2	1.32	2.35		1.03	BB-3	20	1	2
3	20	1	BB-4	0.88		3.29	2.42	CU-1	40	2	4
5	20	2	CU-3	1.28	3.69		2.42	=.	-	-	6
7	-	-	-1	1.28		3.69	2.42	CU-2	40	2	8
9	20	1	SPARE	-	2.42		2.42	-	-	-	10
11	20	1	SPARE	-		-		SPARE	20	1	12
TOTA	L LOAI	PER	PHASE:	-	8.5	7.0			-		
TOTAL LOAD ON PANEL:					15.43	KVA					

NOTES:

ISSUED FOR BIDDING

REVISIONS

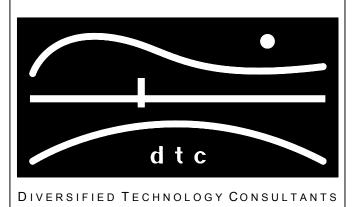

2321 WHITNEY AVE HAMDEN CT 06518 203 239 4200 203 234 7376 FAX


OORR
APPLICATION NO. 1846
BURNS RESIDENCE
3 MARSH RD.
WESTPORT, CT

ELECTRICAL GROUND LEVEL & FIRST FLOOR PLANS

	DTC PROJECT NUMBER:		13-449-026	
	DTC DRAWING FILE:			
	SCALE: 1/4"=1'-"0		DRAWN BY:	WM
	DATE: 12/9/2015		CHECKED BY:	JP

SHEE

E-100

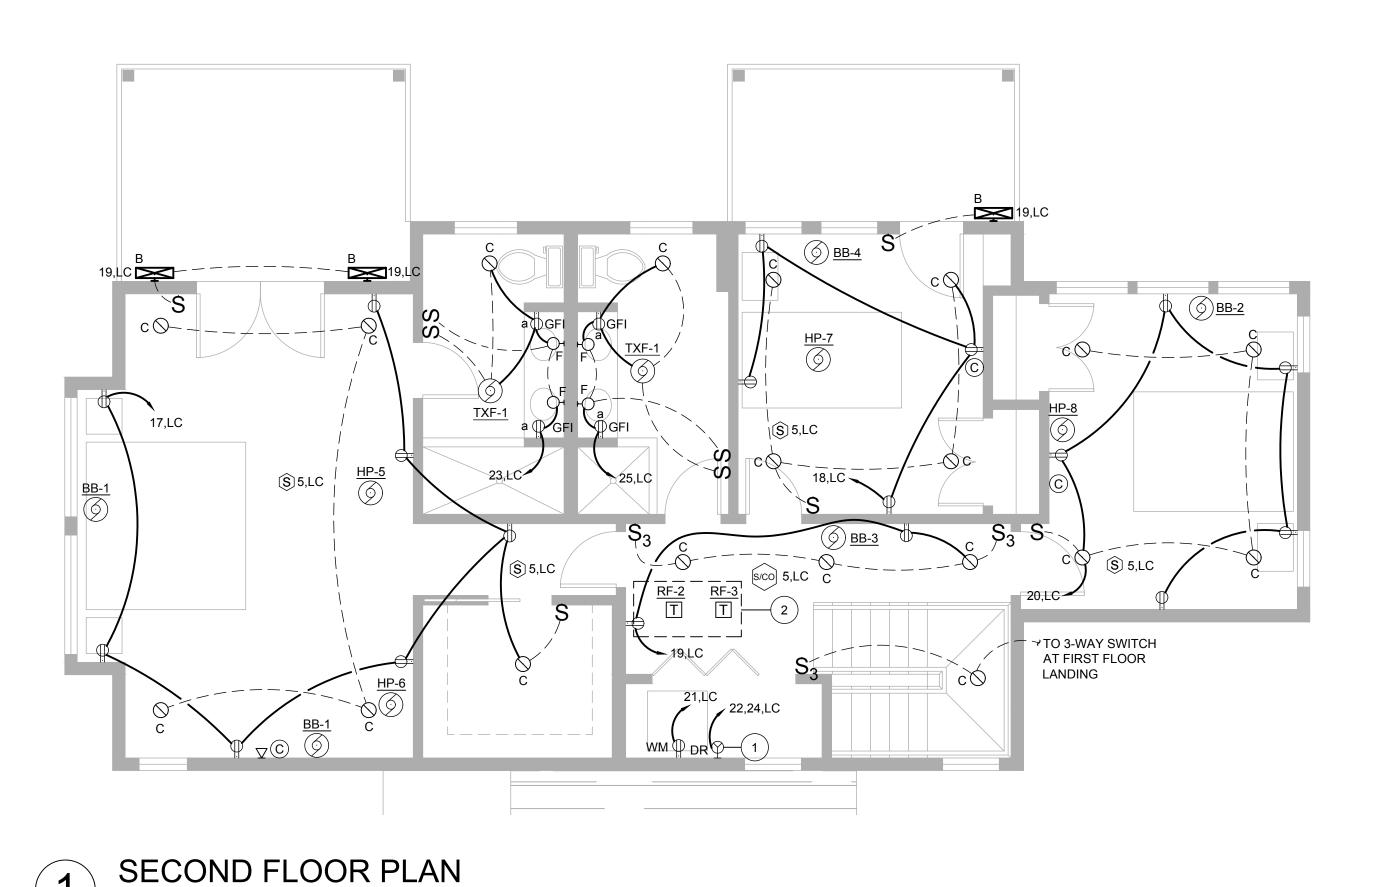

## GENERAL NOTES

- ALL CIRCUITS ON THIS DRAWING SHALL BE SIZED 2#12 , #12G AND SHALL BE CONNECTED TO NEW 20A-1P CIRCUIT BREAKER IN SOURCE PANEL, U.O.N.
- 2. ALL 120VAC BRANCH CIRCUITS EXCEEDING 100' IN LENGTH SHALL BE INCREASED TO 2#10, #10G UNLESS OTHERWISE NOTED.
- 3. REFER TO DWG E-001 FOR SYMBOL LEGEND, ABBREVIATIONS, AND LIGHTING FIXTURE SCHEDULE.
- 4. ALL BRANCH CIRCUIT USED INDOORS SHALL BE WIRED WITH NM CABLE U.O.N. REFER TO FEEDER SCHEDULE ON DRAWING E-001 FOR
- ALL EQUIPMENT AND DEVICES LOCATED OUTDOORS SHALL BE CIRCUITED WITH CONDUIT AND WIRING. REFER TO FEEDER SCHEDULE ON DWG E-001 FOR SIZING.
- 6. ALL 125 -VOLT 15 AND 20 AMP RECEPTACLES LOCATED AT 5 1/2 ' AFF OR BELOW SHALL BE TAMPER RESISTANT.
- 7. REFER TO DWG E-100 FOR PANEL SCHEDULE.



- 1. PROVIDE NEMA 14-30R RECEPTACLE FOR DRYER.
- 2. TRANSFORMERS FOR RADIANT FLOOR HEATING FOR 2ND FLOOR BATHROOMS SHALL BE LOCATED IN ATTIC.

MOTOR CIRCUIT SCHEDULE										
FOLUDIATION	COLIDOE DANIEL	DANIEL OCD DEVICE D	DDANICH CIDCUIT	DIOC OW		DEMARKO				
EQUIPMENT	SOURCE PANEL	OCP DEVICE	BRANCH CIRCUIT	DISC SW	HP/KW	FLA	MCA	PH	VOLT	REMARKS
BB-1	38,LC	20A-1P	2#12 ,#12G		1.466KW			1	120V	1,3,4,5,7
BB-1	41,LC	20A-1P	2#12 ,#12G		1.466KW			1	120V	1,3,4,5,7
BB-2	1,LCB	20A-1P	2#12 ,#12G		1.319KW			1	120V	1,3,4,5
BB-3	2,LCB	20A-1P	2#12 ,#12G		1.026KW			1	120V	1,3,4,5
BB-4	3,LCB	20A-1P	2#12 ,#12G		876W			1	120V	1,3,4,5
CU-1	4,6,LCB	40A-2P	2#10 ,#10G, 3/4" C.	60A-2P		21A	26.4A	1	230V	2,3,4,6
CU-2	8,10,LCB	40A-2P	2#10 ,#10G, 3/4" C.	60A-2P		21A	26.4A	1	230V	2,3,4,6
CU-3	5,7,LCB	20A-2P	2#12 ,#12G, 3/4" C.	30A-2P		11.09A	13.3A	1	230V	2,3,4,6
HP-1	26,28,LC	20A-2P	2#12 ,#12G			0.25A		1	230V	1,3,4,5,9
HP-2	26,28,LC	20A-2P	2#12 ,#12G			0.25A		1	230V	1,3,4,5,9
HP-3	26,28,LC	20A-2P	2#12 ,#12G			0.25A		1	230V	1,3,4,5,9
HP-4	26,28,LC	20A-2P	2#12 ,#12G			0.25A		1	230V	1,3,4,5,9
HP-5	26,28,LC	20A-2P	2#12 ,#12G			0.20A		1	230V	1,3,4,5,9
HP-6	26,28,LC	20A-2P	2#12 ,#12G			0.20A		1	230V	1,3,4,5,9
HP-7	26,28,LC	20A-2P	2#12 ,#12G			0.25A		1	230V	1,3,4,5,9
HP-8	26,28,LC	20A-2P	2#12 ,#12G			0.20A		1	230V	1,3,4,5,9
HWH	33,35,LC 37,39,LC 34,36,LC	(3) 60A-2P	3 SETS OF [2#6 ,#10G]	60A-2P			50A	1	240V	3,4,5,8
RF-1	16,LC	20A-1P	2#12 ,#12G			15A		1	120V	1,3,4,5
RF-2	23,LC	20A-1P	2#12 ,#12G			15A		1	120V	1,3,4,5
RF-3	25,LC	20A-1P	2#12 ,#12G			15A		1	120V	1,3,4,5
RP-1	27,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,10
RP-1	27,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,10
RP-1	29,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,10
RP-1	29,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,10
RP-1	30,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,10
RP-1	30,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,10
RP-1	31,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,11
RP-1	32,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,12
RP-1	32,LC	20A-1P	2#12 ,#12G		750W	6.3A		1	120V	1,3,4,5,12
TXF-1	16,LC	20A-1P	2#12 ,#12G		6W	0.7A		1	120V	3,4,5
TXF-1	23,LC	20A-1P	2#12 ,#12G		6W	0.7A		1	120V	3,4,5
TXF-1	25,LC	20A-1P	2#12 ,#12G		6W	0.7A		1	120V	3,4,5

#### <u>NOTES</u>

- 1. UNIT WIRED TO LINE VOLTAGE WALL THERMOSTAT.
- PROVIDE DISCONNECT SWITCH. DISCONNECT SWITCH SHALL BE NEMA 3R RATED.
- OVERCURRENT PROTECTIVE DEVICE SHALL BE MOLDED CASE CIRCUIT BREAKER U.O.N. 4. REFER TO ELECTRICAL AND MECHANICAL PLANS FOR EQUIPMENT LOCATIONS. DISCONNECTS BY DIV 26 U.O.N.
- 5. UNIT SHALL BE WIRED WITH NM CABLE (ROMEX).
- 6. UNIT SHALL BE CIRCUITED WITH CONDUIT AND WIRING.
- 7. MULTIPLE UNITS MUST BE WIRED IN PARALLEL.
- 8. UNIT REQUIRES 3 DEDICATED CIRCUITS. 9. PROVIDE STOL - THERMAL OVERLOAD SWITCH. STOL SHALL BE NEMA 1 RATED.
- 10. LIVINGROOM AND DINNING ROOM UNITS.
- 11. CORRIDOR UNIT. 12. SUN ROOM UNITS.

### **ISSUED FOR BIDDING**

REVISIONS



OORR APPLICATION NO. 1846 **BURNS RESIDENCE** 3 MARSH RD. WESTPORT, CT

ELECTRICAL SECOND FLOOR PLAN

DTC PROJECT NUMBER: 13-449-026 DTC DRAWING FILE: SCALE: 1/4"=1'-0" DRAWN BY: WM DATE: 12/9/2015 CHECKED BY: JP

E-101